

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[R1973BBLKBILIF6](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

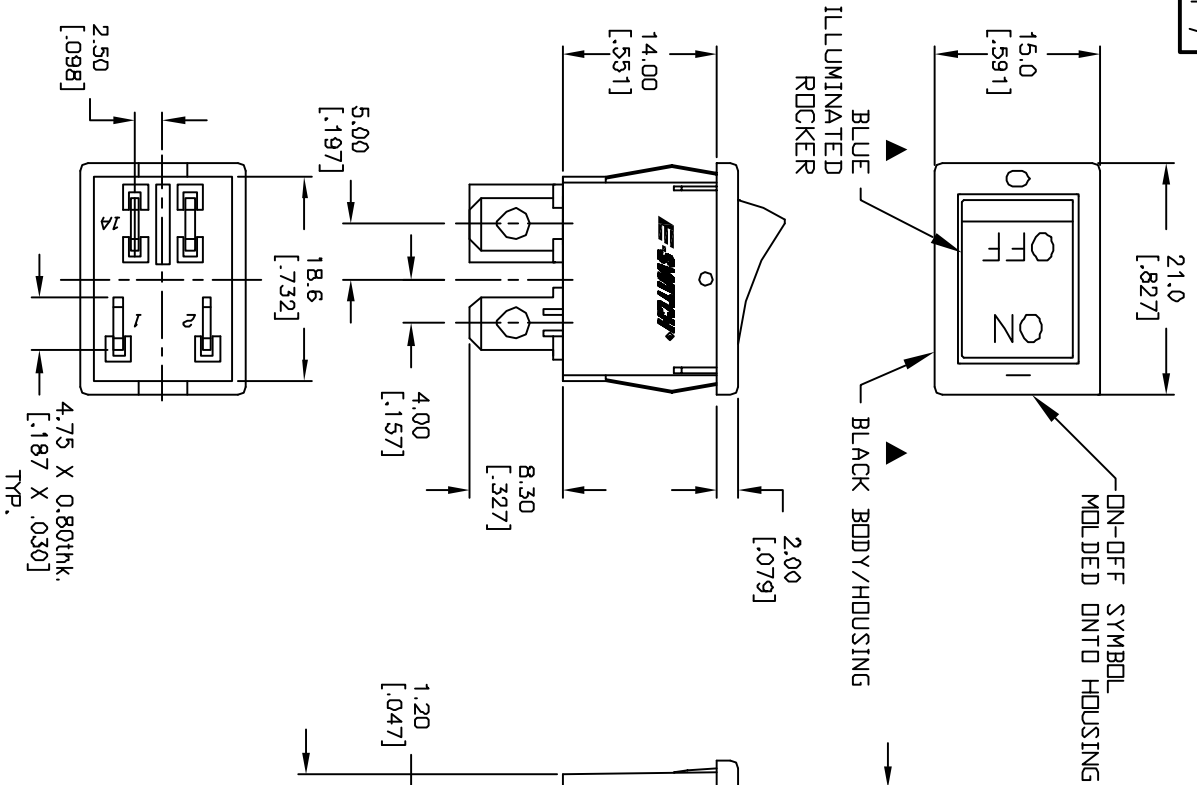

INCANDESCENT BULB

PARAMETERS	SYMBOL	MAX.	UNITS
LAMP VOLTAGE (VDC)	V	6	V
POWER DISSIPATION	P _D	2	Watts
CURRENT	I	200	mA

PANEL THICKNESS	X dimension
0.75-1.25 [0.30-0.49]	19.2-02 [0.7561]
1.25-2.0 [0.49-0.791]	19.4-02 [0.7641]
2.0-3.0 [0.79-1.18]	19.8-02 [0.7801]

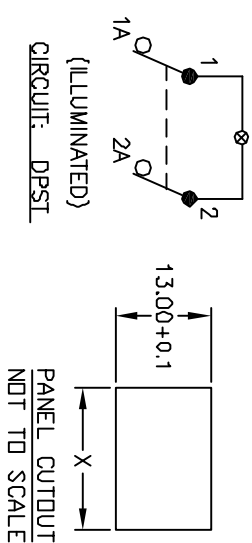

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATING:
6A @250VAC; 9A @125VAC (UL, CSA, VDE)
4(1)A @250VAC
- ▲ 4. LAMP VOLTAGE: 6VDC (INCANDESCENT BULB)
- ▲ 5. MATERIAL:
CONTACT SURFACE: Coin Silver, Silver Plate
TERMINAL: Copper Alloy W/ Silver Plate.
6. CONTACT RESISTANCE: 20millohms TYP. INITIAL
7. INSULATION RESISTANCE: 1000Megohms
8. DIELECTRIC STRENGTH:
>1500V RMS min. @SEA LEVEL
>3000V RMS @SEA LEVEL
9. MECHANICAL LIFE: 50,000 CYCLES.
10. ELECTRICAL LIFE: 10,000 CYCLES.
11. ▲ DENOTES CRITICAL PARAMETER.

E-SWITCH®

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	13305	RELEASED FOR PRODUCTION	7/21/03	AR

TITLE	SCALE	DATE	DR	DWG	REV
R1973BBLKBILIF6	2:1	7/21/03	AR	M400073	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED