

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[R1973BBLKREDIF0](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

SHEET 1 OF 1



RECOMMENDED PANEL MOUNTING

PANEL THICKNESS	X
0.75-1.25	19.2-19.3
1.25-2.00	19.3-19.4
2.00-3.00	19.5-19.6



CIRCUIT: DPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25

▲3. RATING:

6A @250VAC; 9A @125VAC (UL, CSA, VDE)

4. MATERIAL:

CONTACT SURFACE: COIN SILVER, SILVER PLATE
TERMINAL: COPPER ALLOY W/SILVER PLATE.

5. CONTACT RESISTANCE: 20 MILLI-OHMS TYP. INITIAL

6. INSULATION RESISTANCE: 1000 MEGA-OHMS

7. DIELECTRIC STRENGTH:

>1500V RMS min. @SEA LEVEL


8. MECHANICAL LIFE: 30,000 CYCLES.

9. ELECTRICAL LIFE: 10,000 CYCLES



10. ▲ DENOTES CRITICAL PARAMETER.

11. 2002/95/EC (ROHS) COMPLIANT

12. PACKAGE: BULK

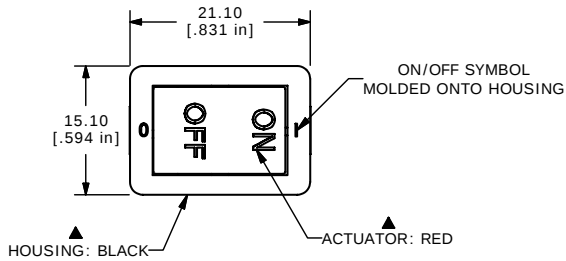

ISOMTRIC

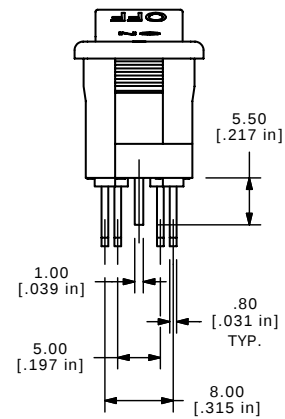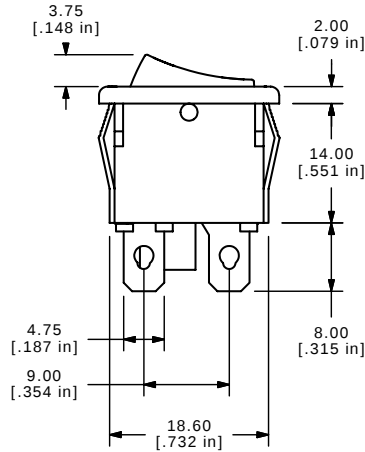

B	16688	REMOVED NOTE 4, PACKAGE ADDED	11/22/06	TN
A	16680	RELEASE FOR PRODUCTION	11/21/06	TN
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE R1973BBLKREDIF0

SCALE 1.5:1

DATE 11/22/2006

DR TN

DWG M400093

REV B