

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:




[E-Switch](#)
[R1973BBLKREDIF2](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

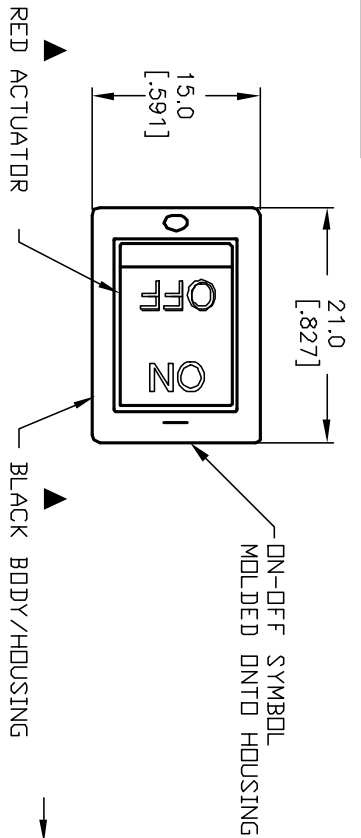

NEON BULB			
PARAMETERS	SYMBOL	MAX.	UNITS
LAMP VOLTAGE (AC)	V	250	V
STARTUP VOLTAGE	V _s	95	V
CURRENT	I	0.8	mA
SERIES RESISTANCE (250V)	R	270	ΩHMS

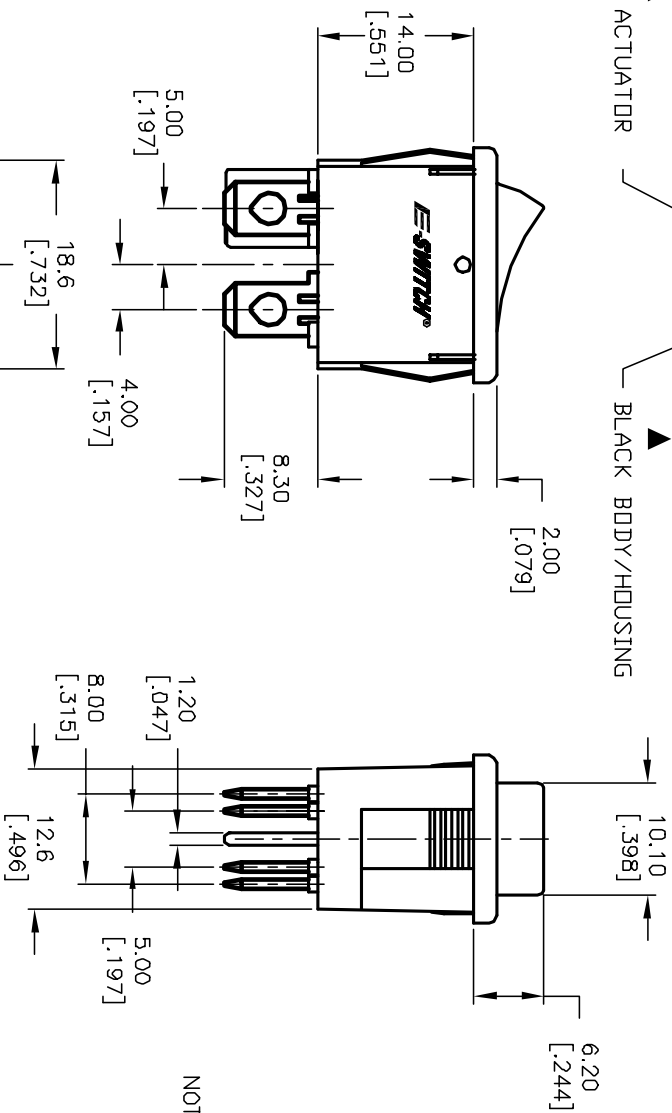

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATING:

- 6A @250VAC; 9A @125VAC (UL, CSA, VDE)
4(1)A @250VAC

- CONTACT SURFACE: Coin Silver, Silver Plate
- TERMINAL: Copper Alloy W/ Silver Plate.
6. CONTACT RESISTANCE: 20milloHMS TYP. INITIAL
7. INSULATION RESISTANCE: 1000MegohMS
8. DIELECTRICAL STRENGTHS >1500V RMS min. @SEA LEVEL
>3000V RMS @SEA LEVEL
9. MECHANICAL LIFE: 50,000 CYCLES.
10. ELECTRICAL LIFE: 10,000 CYCLES.



				TITLE			
				R1973B BLK RED IF2			
A	12419	REVISED/ ADD PARAMETERS	9/13/02	CJB			
REV.	ECN NO.	DESCRIPTION	DATE	CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							
SCALE		DATE	DR	DWG	REV		
1.5:1		9/13/02	CB	M400065	A		