

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[R4JBLKRILEF1](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


SHEET 1 OF 1



RECOMMENDED PANEL MOUNTING





PANEL THICKNESS	X± 0.05
0.75-1.25	29.6-29.7
1.25-2.00	30.1-30.2
2.00-3.00	30.45-30.55

SWITCH FUNCTION	
POS. 1	POS. 2
ON	OFF
1-1a	OPEN



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
3. TERM. NOS. FOR REF. ONLY
- ▲4. RATING: 20A 125VAC, 16A 250VAC UL APPROVED 16A 250VAC VDE APPROVED
5. ELECTRICAL LIFE: OVER 10,000 CYCLES
6. MECHANICAL LIFE: OVER 30,000 CYCLES
7. CONTACT RESISTANCE: <20 mΩ(INITIAL)
8. DIELECTRIC STRENGTH: >1500V 1 min
9. INSULATION RESISTANCE: >1,000 mΩ @ 500V DC
10. LAMP VOLTAGE: NEON-125VAC
11. OPERATING TEMPERATURE: TERMINAL SIDE -20°C to 85°C
ROCKER SIDE -20°C to 55°C
12. ▲DENOTES CRITICAL PARAMETER
13. 2002/95/EC (ROHS) COMPLIANT

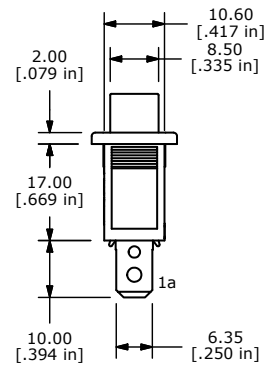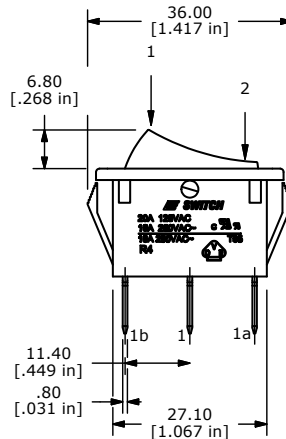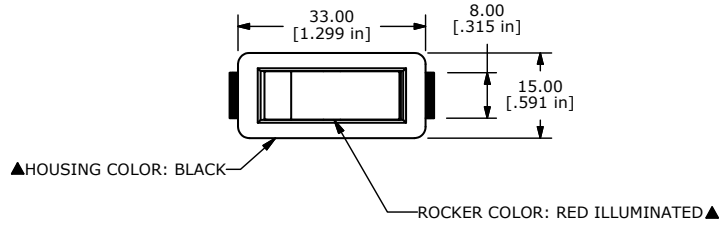

C	19898	UPDATE DRAWING	04/29/11	BMA	E-SWITCH® TITLE R4JBLKRILEF1				
B	15815	EDIT RATING	2/23/06	PH					
A	15795	NEW RELEASE	2/20/06	PH	SCALE 1:1 DATE 2/20/2006 DR PH DWG M041003 REV C				
REV	PCR NO	DESCRIPTION	DATE	BY					

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED