

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[E-Switch](#)
[R6BBLKREDAF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

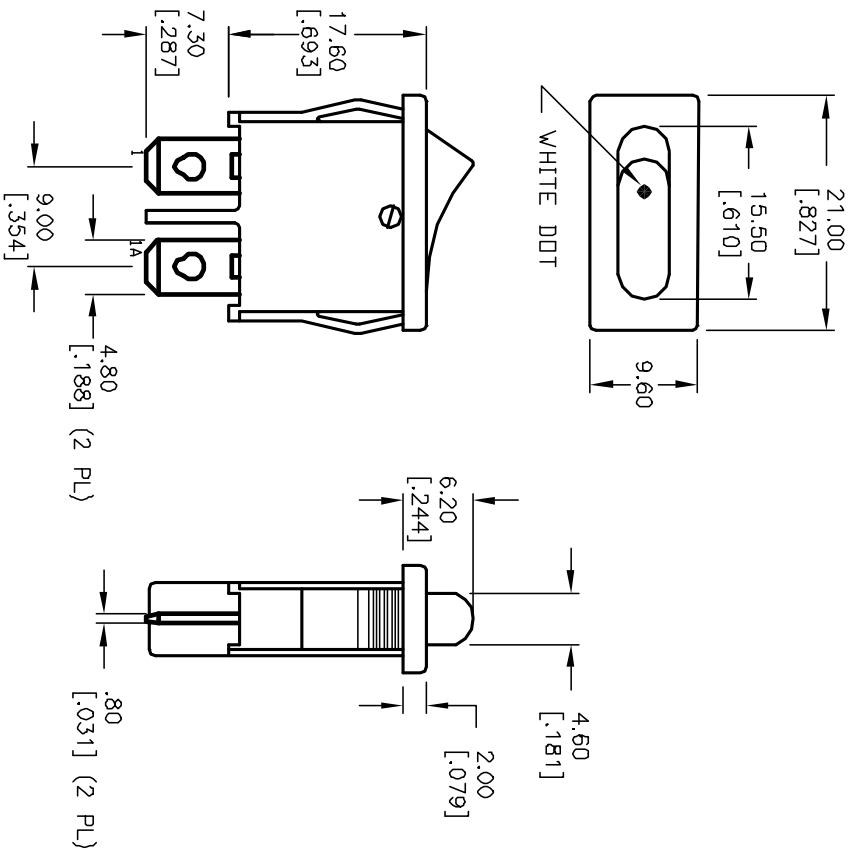


PANEL THICKNESS	X dimension
0.75-1.25 [0.30-.049]	19.2-0.1 [7.56]
1.25-2.0 [0.49-.079]	19.4-0.1 [7.64]
2.0-3.0 [0.79-1.18]	19.8-0.1 [7.80]

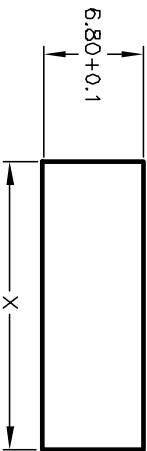

SWITCH FUNCTION		
POS. 1	POS. 2	
<DN>	OFF	
1-1a	OPEN	

()=Momentary



NOTES:

CIRCUIT: SPST



1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4; X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 4(1)A @250VAC, 6A @250VAC 10A @125VAC
5. MATERIALS: TERMINALS: COPPER ALLOY W/SILVER PLATING CONTACTS: COIN SILVER
6. MECHANICAL LIFE: >50,000 CYCLES
7. ELECTRICAL LIFE: >10,000 CYCLES
8. CONTACT RESISTANCE: < 20 milli-OHMS (INITIAL)
9. INSULATION RESISTANCE: > 1000 MEGA-OHMS @ 500VDC
10. DIELECTRIC STRENGTH: >1500VAC 1 MINUTE (INITIAL) >3000V BETWEEN POLES
11. HOUSING & ACTUATOR COLOR:

HOUSING: BLACK
ACTUATOR: RED

E-SWITCH®

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12435	RELEASED FOR PRODUCTION	9/19/02	CJB

TITLE	SCALE	DATE	DR	DWG	REV
R6B BLK RED A F	1.5:1	9/19/02	CJB	M060352	A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSMITTED