

Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[TL1105PF250Q](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


SHEET 0F

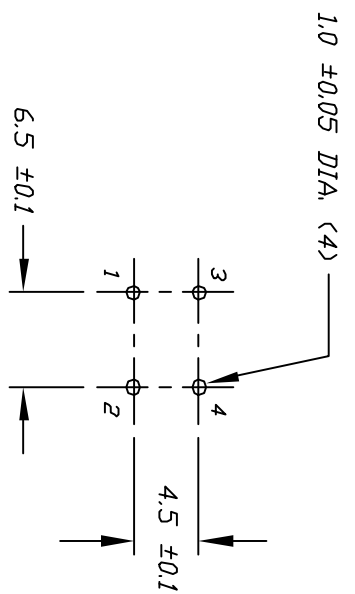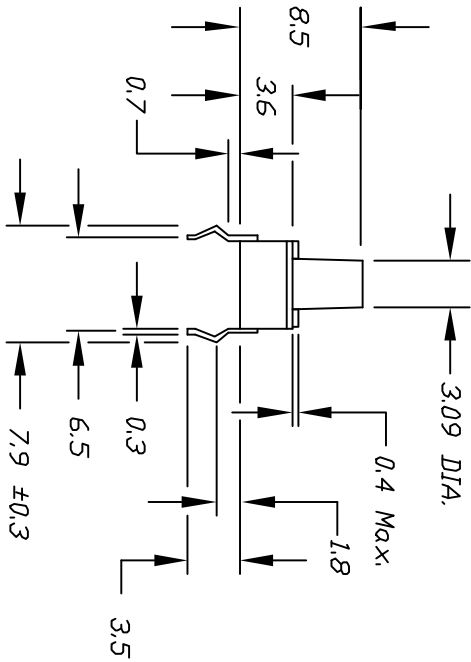

RECOMMEND P.C.B. HOLES

NOTES:

1. ALL DIMENSIONS IN MM
2. TERM. NOS. FOR REF. ONLY
3. RATING: DC 120C, 50mA
4. TRAVEL: 0.25±0.1mm
5. CONTACT RESISTANCE: 100m Ohms Max.
6. LIFE: 100,000 CYLES min.
7. INSULATION RESISTANCE: 100M Ohms min.
8. DIELECTRIC STRENGTH: 250V RMS min.



CIRCUIT, SPST

CONTACT CONFIGURATION

E-SWITCH®

TOLERANCES		TITLE		
0.0	±0.4	TL 1105 P F250 Q		
0.00	±0.25			
REV.	DESCRIPTION	DATE	CHKD	REV.
A	RELEASED FOR PRODUCTION			A
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				
SCALE		DATE	DR	DWG
2:1		4/10/97	MM	P010020