

Excellent Integrated System Limited

Stocking Distributor







Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[TL1240GQ1JCLR](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SHEET 1 OF 1

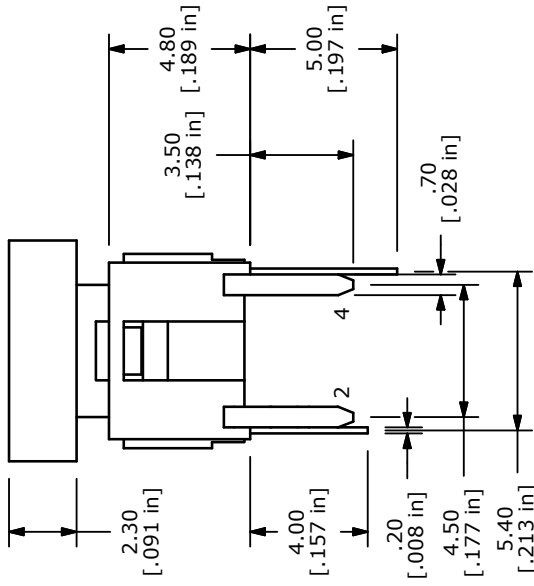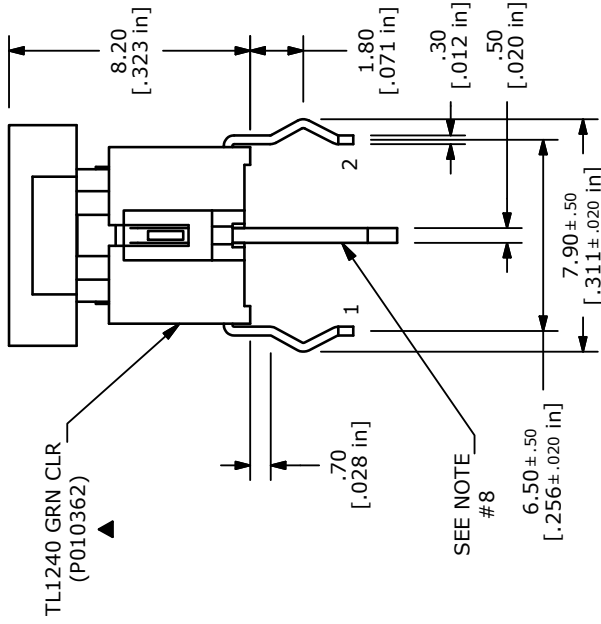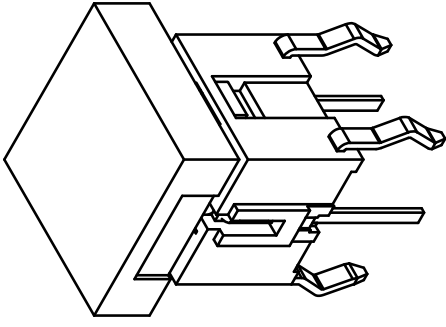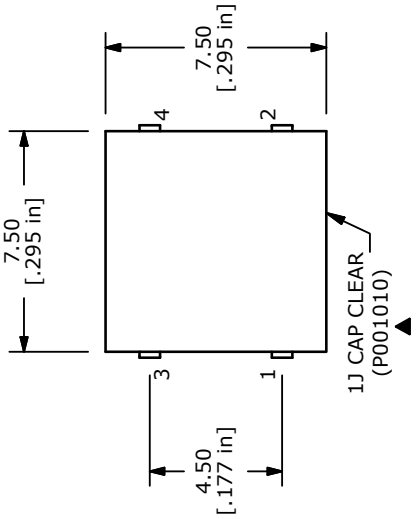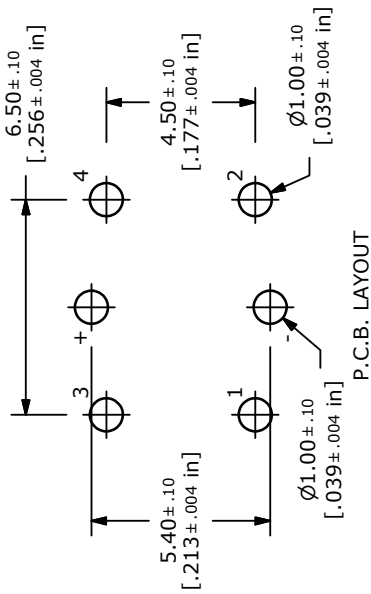

- NOTES:
- ALL DIMENSIONS IN MM
 - GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
 - RATING: 50mA @ 12VDC
 - TRAVEL: 0.25 +0.2/0.1mm
 - OPERATING FORCE: 160±50gf
 - CONTACT RESISTANCE: 100 Milli-Ohms Max
 - 2002/95/EC (ROHS) COMPLIANT
 - SHORTER LEAD WITH COLOR IS NEGATIVE (CATHODE).
 - ▲ DENOTES CRITICAL PARAMETER

LED SPECS	UNITS	GREEN
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	2.1-2.5
LUMINOUS INTENSITY	MCD	5



TITLE TL1240GQ1JCLR

D	19550	DAWING UPDATE / CLEAN-UP	12/28/10	BGL
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 4:1

DATE 12/28/2010

DR BGL

DWG XP0003B

REV D