

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[TL1240YQ1JCLR](#)



For any questions, you can email us directly:

sales@integrated-circuit.com

SHEET 1 OF 1

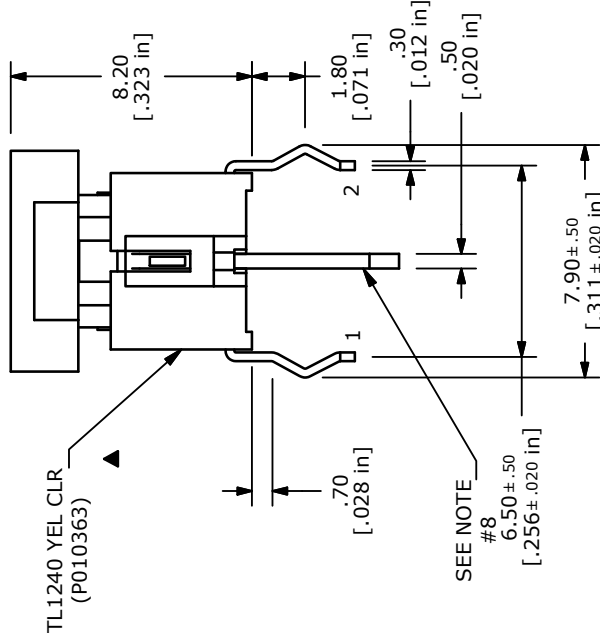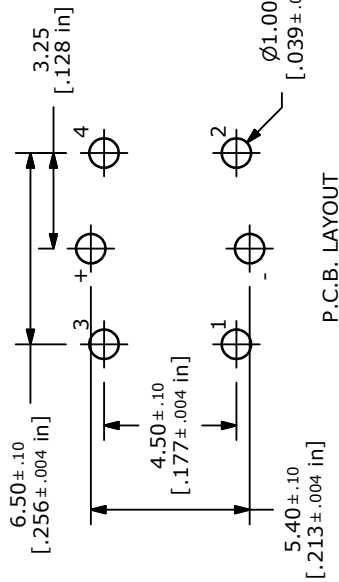

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 3. RATING: 50mA @ 12VDC
 4. TRAVEL: 0.25 +0.2/0.1mm
 5. OPERATING FORCE: 160±50gf
 6. CONTACT RESISTANCE: 100 Milli-Ohms Max
 7. 2002/95/EC (ROHS) COMPLIANT
 8. SHORTER LEAD (WITH COLOR) IS NEGATIVE (CATHODE).
 9. ▲ DENOTES CRITICAL PARAMETER

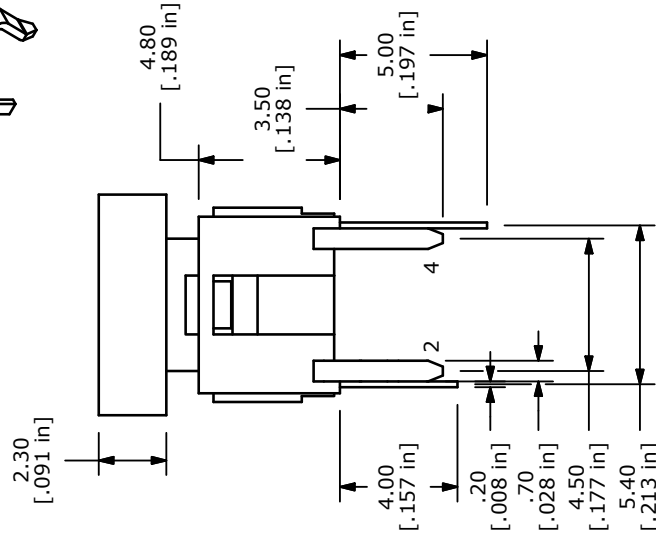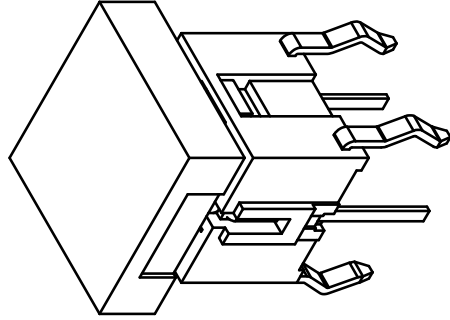

LED SPECS	UNITS	YELLOW
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	2.1-2.6
LUMINOUS INTENSITY	MCD	45



TITLE TL1240YQ1JCLR

D	19550	DRAWING UPDATE / CLEAN-UP	12/28/10	BGL
REV	PCR NO	DESCRIPTION	DATE	BY
		THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED		

SCALE	4:1	DATE	12/28/2010	DR	BGL	DWG	XP0106P	REV	D
-------	-----	------	------------	----	-----	-----	---------	-----	---