

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[E-Switch](#)
[TL1240YQ2JRED](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

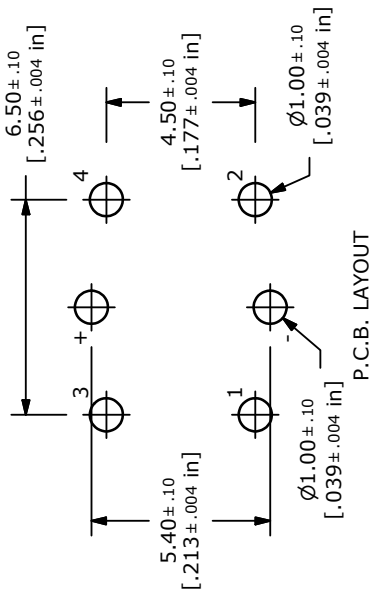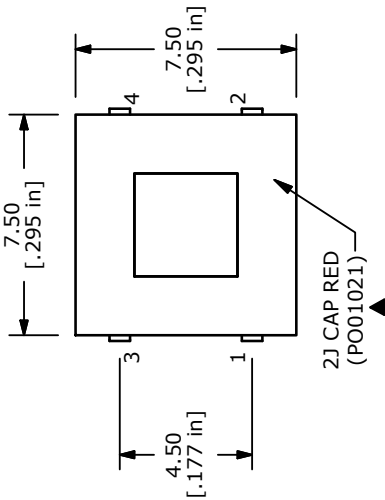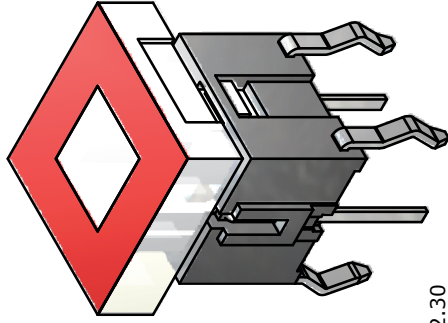

P.C.B. LAYOUT

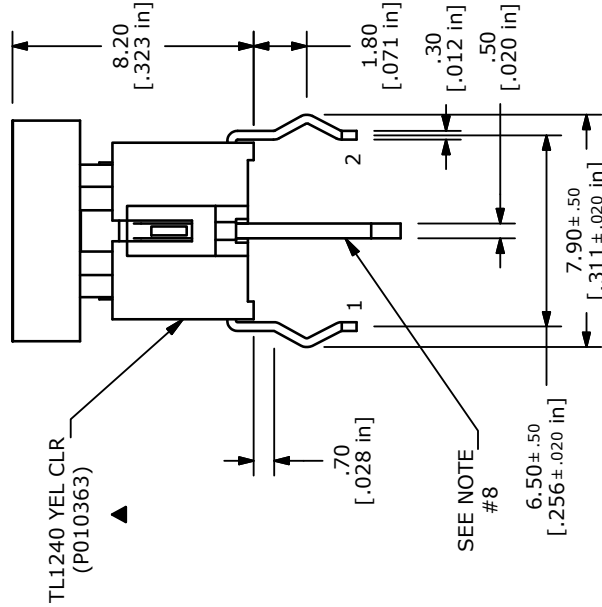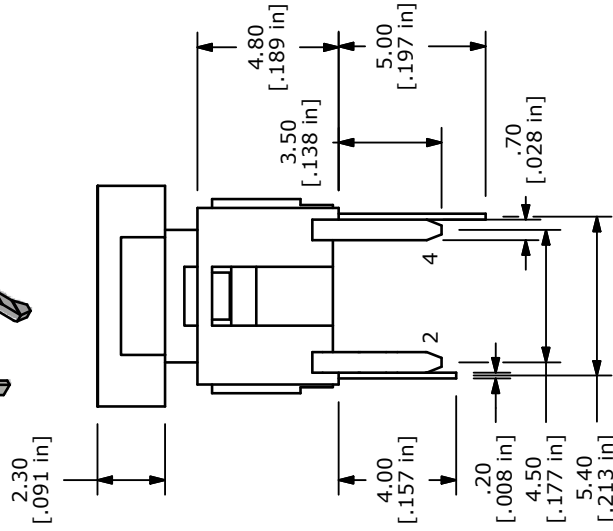

- SEE NOTE #8
- NOTES:
- ALL DIMENSIONS IN MM
 - GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
 - RATING: 50mA @ 12VDC
 - TRAVEL: 0.25 +0.2/0.1mm
 - OPERATING FORCE: 160±50gf
 - CONTACT RESISTANCE: 100 Milli-Ohms Max
 - 2002/95/EC (ROHS) COMPLIANT
 - SHORTER LEAD WITH COLOR IS NEGATIVE (CATHODE).
 - ▲ DENOTES CRITICAL PARAMETER



CIRCUIT: SPST

LED SPECS	UNITS	YELLOW
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	2.1-2.6
LUMINOUS INTENSITY	MCD	45



TITLE		TL1240YQ2JRED	
SCALE	DATE	DR	REV
4:1	12/28/2010	BGL	C
DRAWING UPDATE / CLEAN-UP		DWG	XP0194P
19550	12/28/10	BGL	
DESCRIPTION	DATE	BY	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			