

Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[TLE1105SPF160R](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



SHEET 1 OF 1

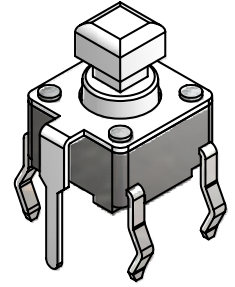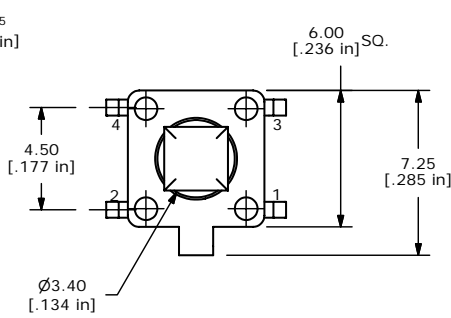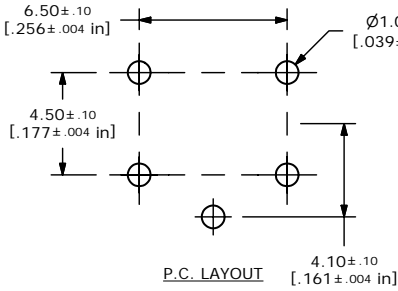

ISOMETRIC

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
3. TERM. NUMBERS FOR REF. ONLY.
- ▲ 4. RATING: 50mA @ 12 VDC
5. OPERATING FORCE: 160± 50gf
6. TRAVEL: 0.25 +0.20/-0.10 mm
7. CONTACT RESISTANCE: 100 mΩ MAX.
8. DIELECTRIC STRENGTH: 250VAC min.
9. INSULATION RESISTANCE: 100 MEGAΩ min.
10. ELECTRICAL LIFE: 100,000 CYCLES
11. OPEARTING TEMP: -20°C TO 70°C
12. ▲ DENOTES CRITICAL PARAMETER.
13. 2002/95/EC (ROHS) COMPLIANT
14. PACKAGE: POLYBAG/750 PIECES PER

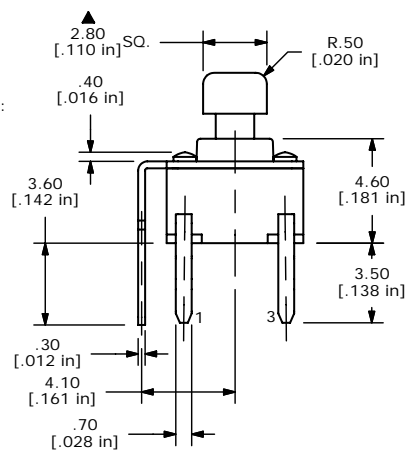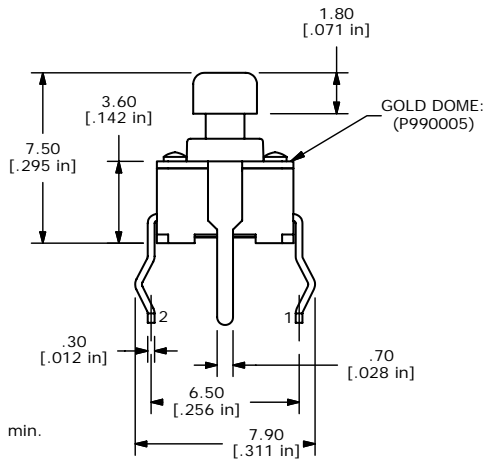

A	16754	RELEASED FOR PRODUCTION	12/22/06	TN
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE TLE1105SPF160R				
SCALE 4:1	DATE 12/22/2006	DR TN	DWG P010124	REV A