

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)

[10078991-G22-06ULF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

10078991-GXX-XXULF


PLATING
0.76 µm GXT (Pd Ni with gold flash)
over 1.27 µm Nickel underplate

TAIL LENGTH





STYLE	DIM B
2	2.5
3	3.1

LATCH TYPE :
1 = STANDARD : For use with STRAIN-RELIEF 10073978
2 = LOW PROFILE : For use without STRAIN-RELIEFSIZE : TOTAL NB OF POSITIONS
SEE SHEET 2

PACKAGING, SEE NOTE 4

SUFFIX LETTER "LF" INDICATES
THE PRODUCT IS ROHS
COMPATIBLE, SEE NOTE 5.

OPENED POSITION

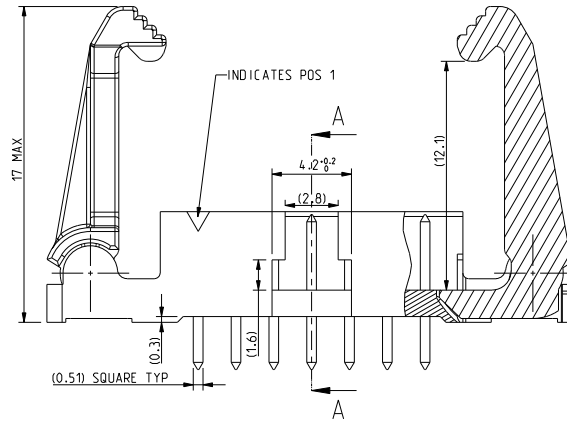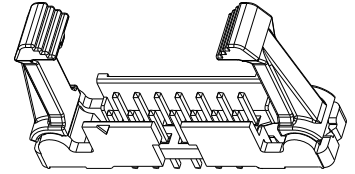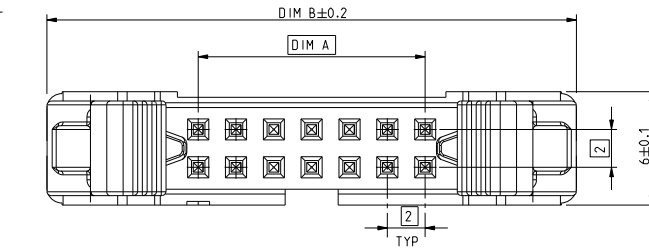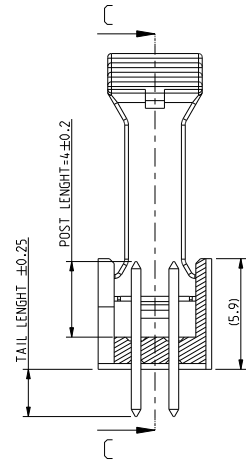SECTION C-C
VIEW WITH STANDARD LATCH

SECTION A-A




- NOTES :
- 1- MATERIAL HOUSING : HIGH TEMPERATURE THERMOPLASTIC
UL 94 V0, COLOR CREAM.
- MATERIAL LATCH : HIGH TEMPERATURE THERMOPLASTIC
UL 94 V0, COLOR BLACK.
 - 2- MATERIAL TERMINAL : COPPER ALLOY
 - 3- PIN RETENTION IN EITHER DIRECTION : 7N MIN
 - 4- PACKAGING
U- TUBE WITHOUT PICK UP CAP
 - 5- ROHS COMPATIBLE PRODUCT SPECIFICATIONS :
 - a- PLATING :
"LF" MEANS THE PRODUCT IS LEAD FREE
2 µm MINIMUM MATTE TIN OVER 1.27 µm NICKEL UNDERPLATE
 - b- MANUFACTURING PROCESS COMPATIBILITY
THE HOUSING WILL WITHSTAND EXPOSURE TO 260 °C ±5 °C SOLDER BATH
TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm
THICK CIRCUIT BOARD.
 - c- LABELLING
MEETS PACKAGING SPECS AS PER GS-14-920.
 - d- THIS PRODUCT MEETS EUROPEAN DIRECTIVES
AND OTHER CONTRY REGULATION AS DESCRIBED IN GS-22-008.

rev	ecr no	dr	date
A	F08-0110	LSA	08-01-16
B	F08-0249	LMU	08-12-01
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302		tolerance std ISO 406 ISO 1101		projection 			
TOLERANCES UNLESS OTHERWISE SPECIFIED									
Dr	NEBU PM	07-06-19	ANGULAR	0.X ±/		size	A3	Scale 5:1	
Eng	JM COMPAGNON	07-06-19	LINEAR		0.XX ±/				
Chr	JM COMPAGNON	07-06-19	0° ±/	0.XXX ±/		ECN	F08-0110		
Appr	L. SAILLARD	07-06-19	Product family		-	Spec ref	-		
			EJECT LATCH HEADER VERTICAL TMT			dwg no 10078991		Rev. B	
catalog no			PDS-Rev-C			CUSTOMER		sheet 1 of 2	


PDS-Rev-C PDM-Rev-B PDS-Rev-C PDM-Rev-B PDS-Rev-C PDM-Rev-B PDS-Rev-C PDM-Rev-B

SIZE	POSITIONS	DIM A	DIM B
06	2x3	4,00	20,00
08	2x4	6,00	22,00
10	2x5	8,00	24,00
12	2x6	10,00	26,00
14	2x7	12,00	28,00
24	2x12	22,00	38,00
30	2x15	28,00	44,00
40	2x20	38,00	54,00
44	2x22	42,00	58,00
50	2x25	48,00	64,00

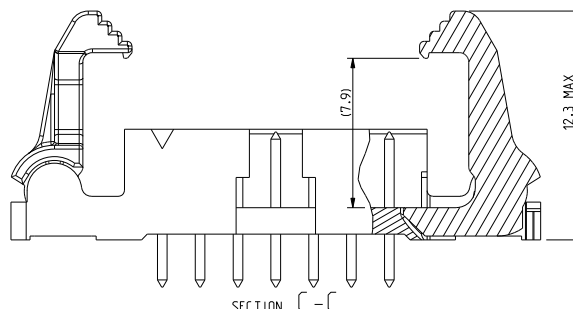


EXAMPLE 10078991-G02-14YLF
LOW PROFILE LATCH

WITH STRAIN-RELIEF ACCESSORY
- STANDARD LATCH -



WITHOUT STRAIN-RELIEF ACCESSORY
- LOW PROFILE LATCH -



www.fciconnect.com		surface		tolerance std		projection		mm	
		ISO 1302		ISO 406 ISO 1101					
		TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	NEBU PM	07-06-19	ANGULAR	LINEAR	0.X	±/	size	A3	Scale
Eng	JM COMPAGNON	07-06-19			0.XX	±/			3:1
Chr	JM COMPAGNON	07-06-19	0° ±/		0.XXX	±/	ECN	F08-0110	
Appr	L. SAILLARD	07-06-19	Product family			- Spec ref			-
		EJECT LATCH HEADER				dwg no		10078991	Rev.
		VERTICAL TMT							B
		catalog no						CUSTOMER	sheet 2 of 2