

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)

[10078995-G02-06ULF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

10078995-G0X-XXYLF




PLATING
0.76 µm GXT
(Pd Ni WITH GOLD FLASH ON
CONTACT AREA)
1.27 µm Ni MIN UNDERPLATE

LATCH TYPE :
1 = STANDARD : For use with STRAIN-RELIEF 10073978
2 = LOW PROFILE : For use without STRAIN-RELIEF

SIZE : TOTAL NB OF POSITIONS
SEE SHEET 2


PACKAGING, SEE NOTE 4

RoHS COMPATIBLE, SEE NOTE 5.

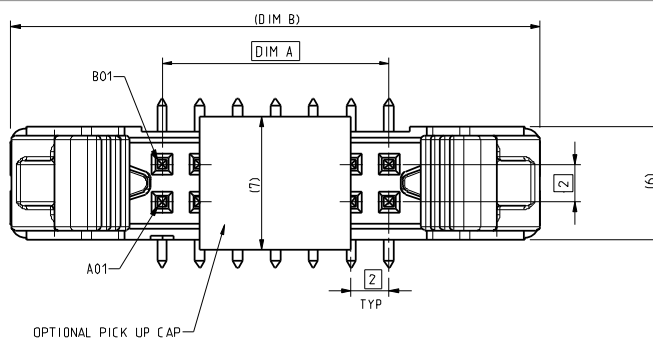


OPENED POSITION

⌀0.3

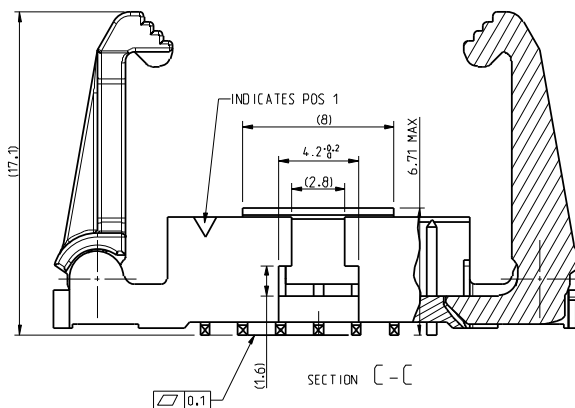

SECTION C-C

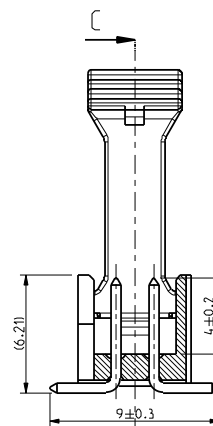

SECTION A-A
WITHOUT PICK UP CAP

- NOTES :
- 1- MATERIAL HOUSING : HIGH TEMPERATURE THERMOPLASTIC
UL 94 VO, COLOR CREAM.
 - 2- MATERIAL LATCH: HIGH TEMPERATURE THERMOPLASTIC
UL 94 VO, COLOR BLACK.
 - 3- MATERIAL TERMINAL : COPPER ALLOY
 - 4- PIN RETENTION IN EITHER DIRECTION : 7N MIN
 - 5- PACKAGING
U= TUBE WITHOUT PICK UP CAP.
A= TAPE & REEL WITH PICK UP CAP.
 - 6- ROHS COMPATIBLE PRODUCT SPECIFICATIONS :
a- PLATING :
LF MEANS THE PRODUCT IS LEAD FREE
2 µm MATTE TIN MIN ON TAIL OVER 1.27 µm NICKEL UNDERPLATE.
 - 7- MANUFACTURING PROCESS COMPATIBILITY
THE HOUSING WILL WITHSTAND EXPOSURE TO
260°C PEAK TEMPERATURE FOR 30 SECONDS
MAX IN A CONVECTION, INFRA RED, VAPOR
PHASE OR REFLOW OVEN.
 - 8- LABELLING
MEETS PACKAGING SPECS AS PER GS-14-920.
 - 9- THIS PRODUCT MEETS EUROPEAN DIRECTIVES
AND OTHER CONTRY REGULATION AS DESCRIBED
IN GS-47-0004

rev	ecn no	dr	date
A	F08-0110	LSA	08-01-16
B	B-19190	LMU	14-11-07
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-




www.fciconnect.com		surface ISO 1302	tolerance std ISO 406	projection ISO 1101	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	NEBU PM	07-06-19	ANGULAR	0.X	±/
Eng	JM COMPAGNON	07-06-19	LINEAR	0.XX	±/
Chr	JM COMPAGNON	07-06-19	0° ±/°	0.XXX	±/
Appr	L. SAILLARD	07-06-19	Product family		
FCI		EJECT LATCH HEADER			Rev.
title		VERTICAL SMT			B
catalog no		CUSTOMER			sheet 1 of 2

PDS: Rev :B

STATUS:Released

Printed: Nov 13, 2014


SIZE	POSITIONS	DIM A	DIM B
06	2x3	4.00	20.00
08	2x4	6.00	22.00
10	2x5	8.00	24.00
12	2x6	10.00	26.00
14	2x7	12.00	28.00
24	2x12	22.00	38.00
30	2x15	28.00	44.00
40	2x20	38.00	54.00
44	2x22	42.00	58.00
50	2x25	48.00	64.00

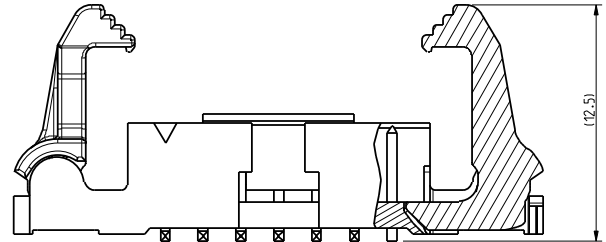


EXAMPLE 10078995-G02-14YLF
LOW PROFILE LATCH

PRODUCT USED IN COMBINATION WITH IDC
RECEPTACLE P/Ns 89361 & 89941

WITH STRAIN-RELIEF ACCESSORY
- STANDARD LATCH -



WITHOUT STRAIN-RELIEF ACCESSORY
- LOW PROFILE LATCH -



www.fciconnect.com		surface ISO 1302	-	tolerance std ISO 406	ISO 1101	projection A3	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED				size	Scale
Dr	NEBU PM	07-06-19	ANGULAR	0.X	±/	A3	3:1
Eng	JM COMPAGNON	07-06-19	LINEAR	0.XX	±/	ECN	B-19190
Chr	JM COMPAGNON	07-06-19	0° ±/°	0.XXX	±/	-	-
Appr	L. SAILLARD	07-06-19	Product family	-	Spec ref	-	-
FCI		EJECT LATCH HEADER				Dwg no	10078995
		VERTICAL SMT				Rev.	B
		catalog no				CUSTOMER	sheet 2 of 2

PDS: Rev :B

STATUS:Released

Printed: Nov 13, 2014