

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Z-Hook](#)
[613XR-60BLK](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XRCOLOR
 HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
 AVAILABLE IN TEN COLORS.


CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533.
 GOLD PLATED PER MIL-G-45204 B TYPE 1 0.00001 [0.0000254] THICK MINIMUM.

SPRING: STAINLESS STEEL TYPE 302.

2. P/N: W-600/COLOR
 18AWG 65X36 TINNED COPPER
 0.144 [3.66] O.D. PVC INSULATION
 AVAILABLE IN TEN COLORS.

3. PERFORMANCE
 MAXIMUM CURRENT: 4.0 AMPS
 MAXIMUM VOLTAGE: 5000 W.V.D.C.
 MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS		DATE	APPROVED
LTR			

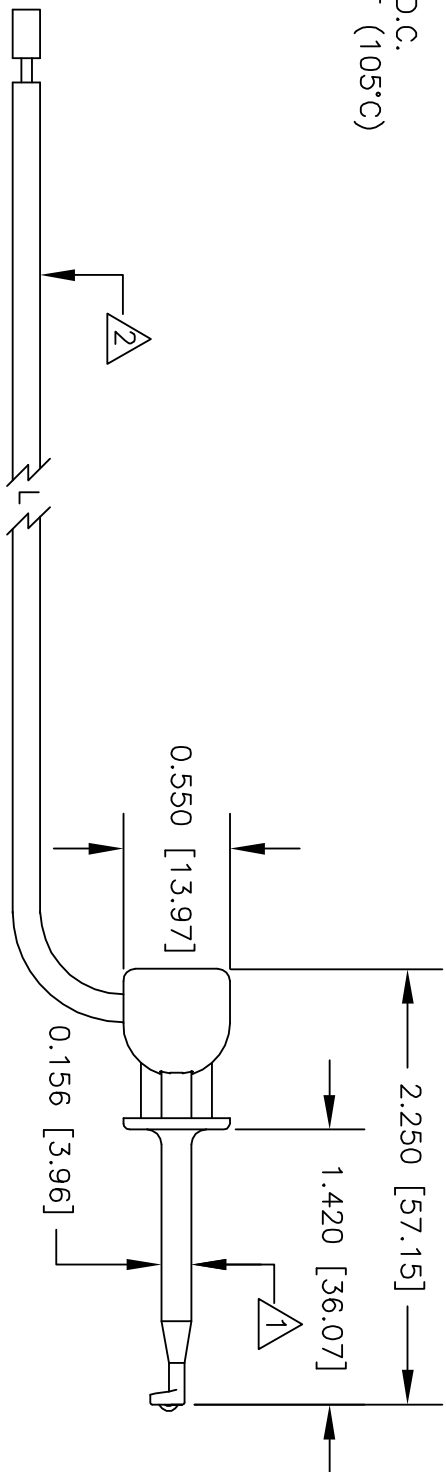

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.		DESCRIPTION	
±	.XX ±	±	DRAWN	R.L.	10/10
±	.XXX ±	±	APPROVED BY		
MATERIAL SEE NOTE.				E-Z-HOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
FINISH SEE NOTE.				MINI-HOOK (XR) TO LEAD ONLY	
NEXT ASSY USED ON				SIZE CODE IDENT NO. DRAWING NO.	
				A 08505 613XR	
APPLICATION DO NOT SCALE DRAWING				SCALE 1:1	
				SHEET 1 OF 1	
				REV.	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT.