

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Diodes Incorporated](#)
[T2V5S5-7](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

T2V5S5 / T3V3S5 / T5V0S5 / T12S5

UNIDIRECTIONAL SURFACE MOUNT TVS


NEW PRODUCT

Features

- Ideally Suited for ESD Protection
- Ultra-Small Surface Mount Package
- Excellent Clamping Capability, Fast Response Time
- Low Capacitance
- Lead Free By Design/RoHS Compliant (Note 1)
- "Green" Device (Note 2)

Mechanical Data

- Case: SOD-523
- Case Material: Molded Plastic, "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminal Connections: Cathode Band
- Terminals: Solderable per MIL-STD-202, Method 208
- Terminals: Finish - Matte Tin annealed over Alloy 42 leadframe. Solderable per MIL-STD-202, Method 208
- Marking & Type Code Information: See Electrical Specifications Table
- Ordering Information: See Page 2
- Weight: 0.001 grams (approximate)

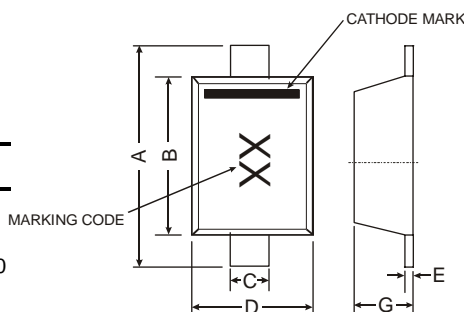

SOD-523		
Dim	Min	Max
A	1.50	1.70
B	1.10	1.30
C	0.25	0.35
D	0.70	0.90
E	0.10	0.20
G	0.55	0.65
All Dimensions in mm		

Maximum Ratings @T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Forward Voltage @ I _F = 10mA	V _F	0.9	V
Power Dissipation (Note 3) (See figure 2)	P _d	150	mW
Thermal Resistance, Junction to Ambient Air (Note 3)	R _{θJA}	833	°C/W
Operating and Storage Temperature Range	T _j , T _{STG}	-65 to +150	°C
ESD Rating	Human Body Model	8	kV
	Machine Model	400	V
	IEC61000-4-2 Air Discharge	30	kV
	IEC61000-4-2 Contact Discharge	30	kV

Electrical Characteristics @T_A = 25°C unless otherwise specified

Part Number	Reverse Standoff Voltage	Min. Breakdown Voltage V _{BR} @ I _T	Test Current	Max. Reverse Leakage @ V _{RWM} (Note 4)	Typ. Clamping Voltage @ I _{PP} = 5A (t _p = 8 x 20 μs) (See figure 1)	Max. Clamping Voltage V _c @ I _{PP} (t _p = 8 x 20 μs) (See Figure 1)	Max. Clamping Voltage V _c @ I _{PP} (t _p = 8 x 20 μs) (See Figure 1)		Peak Power Dissipation (See Figure 1)	Typical Total Capacitance V _R = 0V f = 1MHz	Marking Code	
	V _{RWM} (V)	Min (V)	I _T (mA)	I _R (μA)	V _c (V)	V _c (V)	I _{PP} (A)	V _c (V)				I _{PP} (A)
T2V5S5	2.5	4.0	1.0	12	6.5	8.1	8.9	-	-	70	110	EB
T3V3S5	3.3	5.0	1.0	4	8.4	14.1	11.2	16	16	220	85	ED
T5V0S5	5.0	6.2	1.0	2	15	22	9.4	27	15	260	60	EJ
T12S5	12	14.1	1.0	0.8	19.7	25	9.6	28	12	300	60	ES

- Notes:
1. No purposefully added lead.
 2. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead_free/index.php.
 3. Part mounted on FR-4 board with recommended pad layout, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
 4. Short duration pulse test used to minimize self-heating effect.



NEW PRODUCT

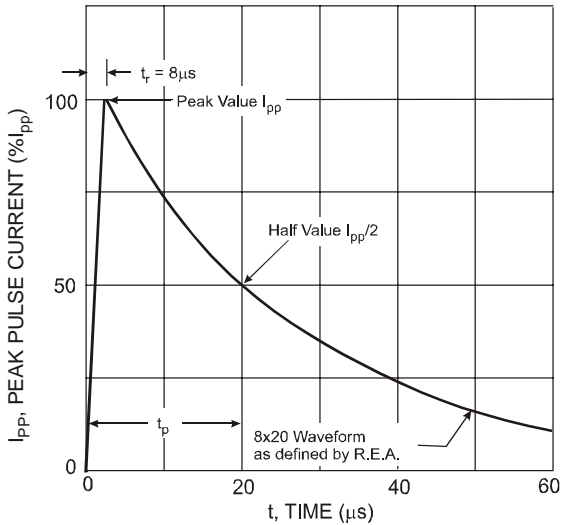


Fig. 1 Pulse Waveform

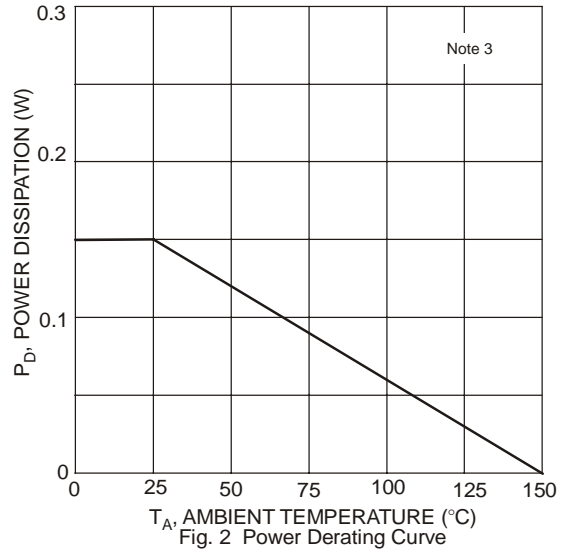


Fig. 2 Power Derating Curve

Ordering Information (Note 5)

Device	Packaging	Shipping
(Type Number)-7*	SOD-523	3000/Tape & Reel

* Add "-7" to the appropriate type number in Table 1 above example: 2.5V TVS = T2V5S5-7.

Notes: 5. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.