

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[EG1400A](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



E-SWITCH™

SERIES EG1400 SWITCHES

SLIDE SWITCHES



FEATURES & BENEFITS

Tape & Reel Packaging
3-position
Sub-miniature
Surface Mount

APPLICATIONS / MARKETS

Computer Servers/peripherals
Consumer electronics
Instrumentation
Test & measurement

MECHANICAL SPECIFICATIONS

Mechanical Life:	10,000 cycles
Force:	200 +/- 150 gf in both directions
Travel:	1.5 +/- 0.1mm each position

ELECTRICAL SPECIFICATIONS

Electrical Life:	10,000 cycles
Contact Rating:	300mA @ 4VDC
Contact Resistance:	70mΩ (initial max)
Insulation Resistance:	100MΩ (Min @ 100VDC)
Dielectric Strength:	100VAC

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-10°C to +60°C
Storage Temperature:	-20°C to +80°C

HOW TO ORDER:


SERIES
EG

MODEL


1400

ACTUATOR



A = 1.00mm
B = 2.50mm



SCHEMATIC

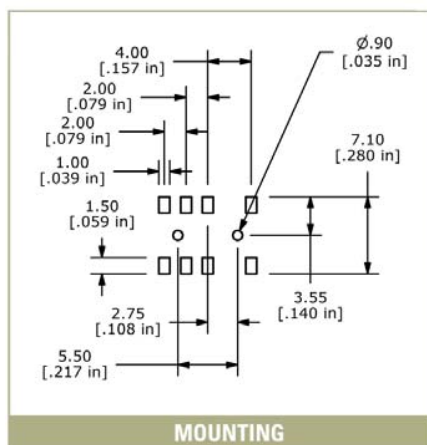

MOUNTING

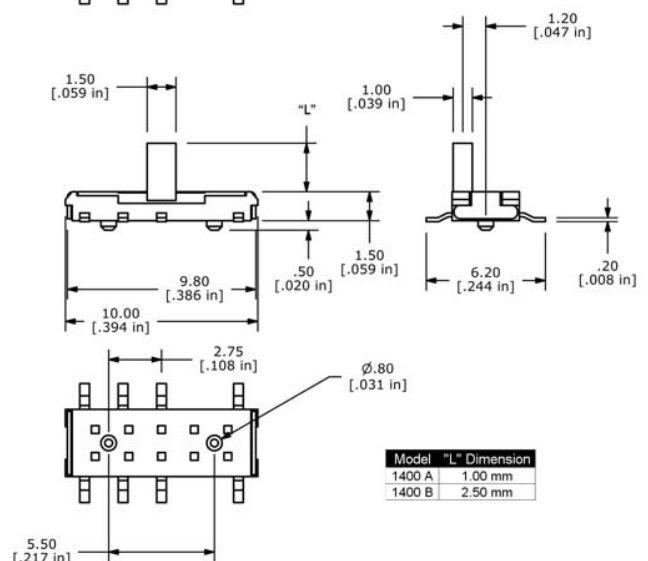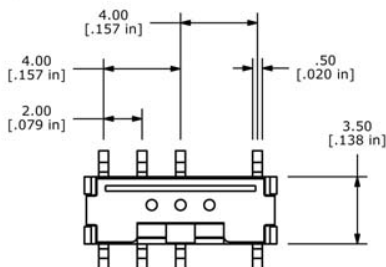

Model	"L" Dimension
1400 A	1.00 mm
1400 B	2.50 mm