

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)

[OSTOP024200](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)


SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

**Material**

- Solid PIN: Brass(CuZn)
- Surface of solder tail: Tin or Au plated.
- Insulator (housing): Thermoplastic (UL94V-0)

**Electrical cULus**

- Voltage rating: 300V
- Current rating: 10A
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: 


RoHS Compliant

PART NUMBER:

OSTOPXX4200


- No. of Poles  
 02: 2 Poles  
 03: 3 Poles  
 ... ..  
 24: 24 Poles

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

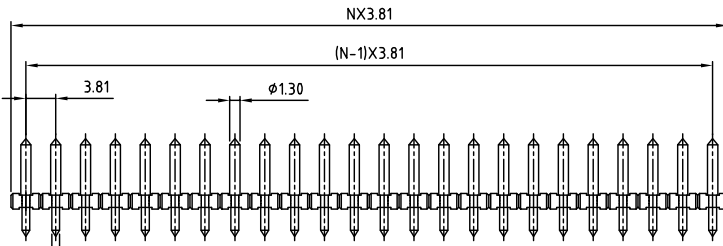

N = Number of contact

P.C.B. LAYOUT



TITLE		OSTOP-3.81mm series 2p-24p		
PART NO.	OSTOPXX4200	DWG NO.	OSTOPXX4200.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.
Shi Jun 2006.10.30	Marvin 2006.10.30	Marvin 2006.10.30	Marvin 2006.10.30	
SHEET: 01/01		REV.: D	UNIT: mm	Tolerance
			SCALE: NONE	X ±0.50
				X.X ±0.30
				X.XX ±0.10
				X* ±1°