

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bourns Inc.](#)
[SRR6038-3R3Y](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Features

- Height of 4.0 mm max.
- Current rating up to 3.5 A
- RoHS compliant*

Applications


- Input/output of DC/DC converters
- Power supplies for:
 - Portable communication equipment
 - Camcorders
 - LCD TVs
 - Car radios

SRR6038 Series - Shielded SMD Power Inductors


Electrical Specifications

Bourns Part No.	Inductance 100 kHz		Q Ref.	Test Frequency (MHz)	SRF Typ. (MHz)	DCR Max. (mΩ)	Irms (A)	Isat (A)
	(μH)	Tol. %						
SRR6038-3R3Y	3.3	±30	9.8	7.96	75.9	20	3.50	3.60
SRR6038-5R0Y	5.0	±30	8.9	7.96	42.6	24	2.90	2.95
SRR6038-6R2Y	6.2	±30	9.0	7.96	42.3	27	2.50	2.60
SRR6038-7R4Y	7.4	±30	7.5	7.96	32.9	31	2.30	2.55
SRR6038-8R2Y	8.2	±30	7.4	7.96	29.6	34	2.20	2.45
SRR6038-8R7Y	8.7	±30	7.3	7.96	27.5	34	2.20	2.35
SRR6038-100Y	10	±30	8.8	2.52	24.9	38	2.00	2.05
SRR6038-120Y	12	±30	8.3	2.52	17.9	53	1.70	1.95
SRR6038-150Y	15	±30	8.6	2.52	18.0	57	1.60	1.90
SRR6038-180Y	18	±30	8.0	2.52	13.8	92	1.50	1.70
SRR6038-220Y	22	±30	8.8	2.52	13.9	96	1.30	1.60
SRR6038-270Y	27	±30	7.7	2.52	12.5	109	1.20	1.30
SRR6038-330Y	33	±30	8.6	2.52	12.5	124	1.10	1.20
SRR6038-390Y	39	±30	8.3	2.52	11.8	138	1.00	1.10
SRR6038-470Y	47	±30	8.5	2.52	10.4	155	0.95	1.00
SRR6038-560Y	56	±30	8.2	2.52	8.8	202	0.85	0.90
SRR6038-680Y	68	±30	7.4	2.52	7.5	234	0.75	0.87
SRR6038-820Y	82	±30	7.6	2.52	7.6	324	0.70	0.75
SRR6038-101Y	100	±30	6.7	0.796	6.2	358	0.65	0.68

Soldering Profile

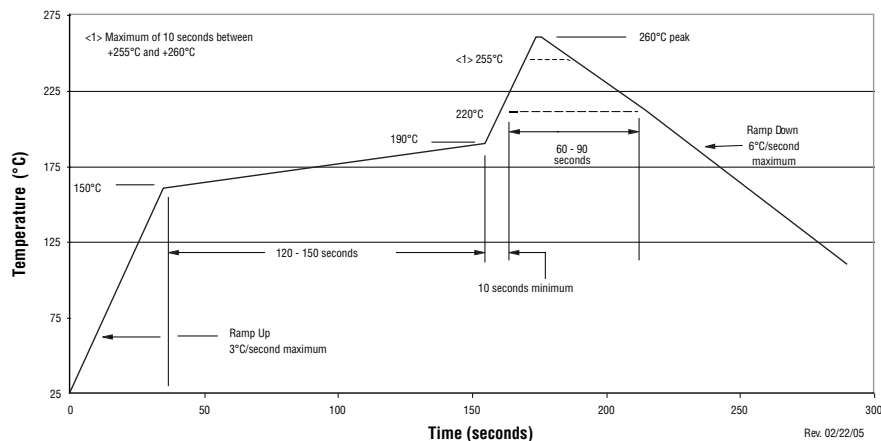

Electrical Schematic

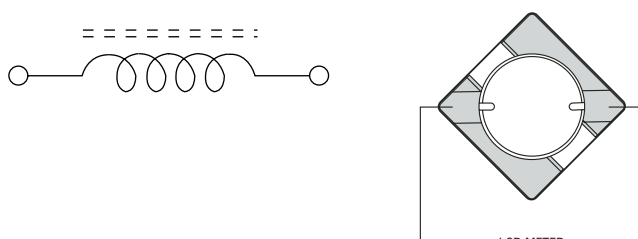


General Specifications

Test Voltage0.1 V, 100 KHz
Reflow Soldering230 °C; 50 sec max.
Operating Temperature ...-40 °C to +125 °C
(Temperature rise included)
Storage Temperature...-40 °C to +125 °C
Resistance to Soldering Heat
.....260 °C for 10 sec.


Materials

Core MaterialFerrite
WireEnamelled Copper
AdhesiveEpoxy Resin
TerminalAg/Ni/Sn
Rated CurrentInd. drop of 35 % typ.
at Isat
Temperature Rise30 °C typ. at Irms
Packaging1000 pcs. per reel

Product Dimensions

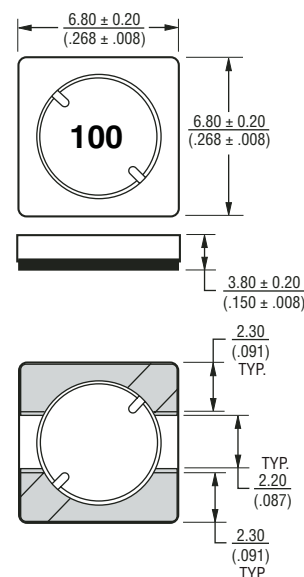

Recommended Layout












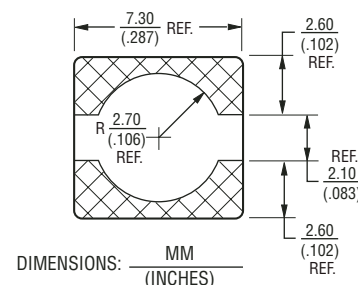


*RoHS Directive 2002/95/EC Jan 27 2003 including Annex
Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

SRR6038 Series - Shielded SMD Power Inductors

BOURNS®

Inductance vs. Current

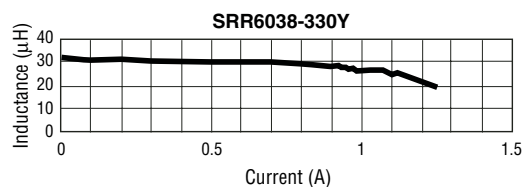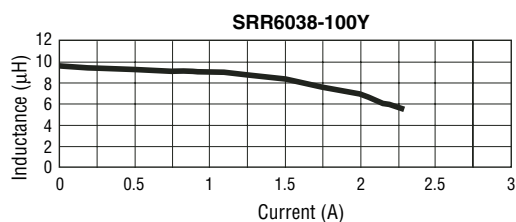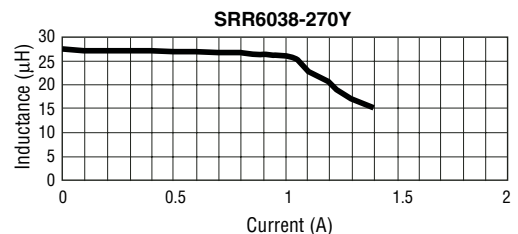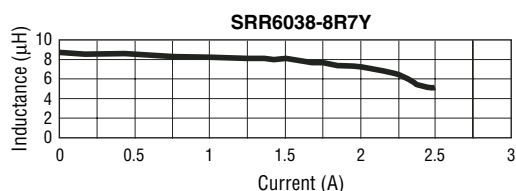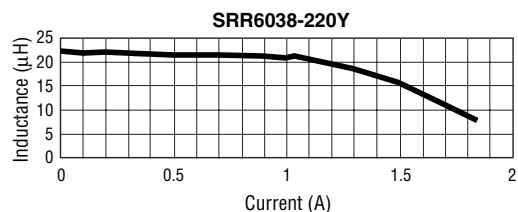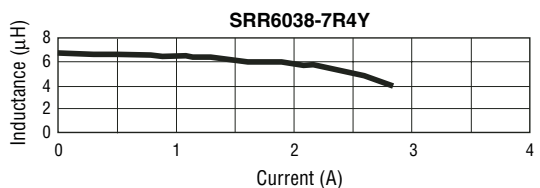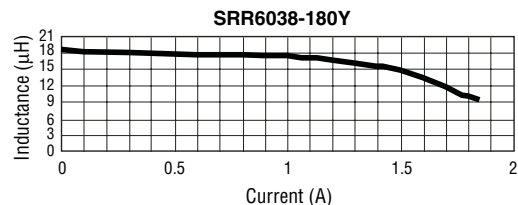
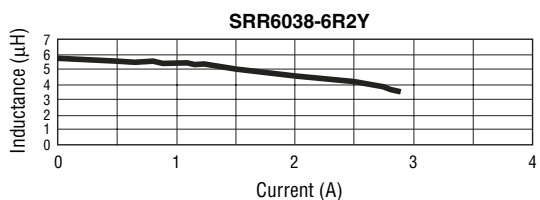
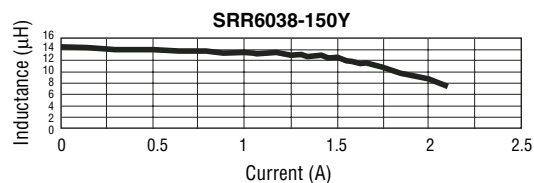
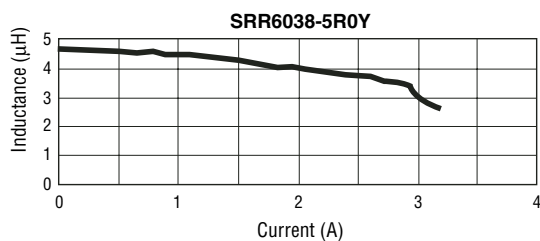
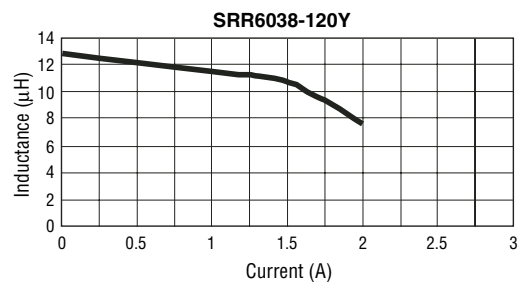
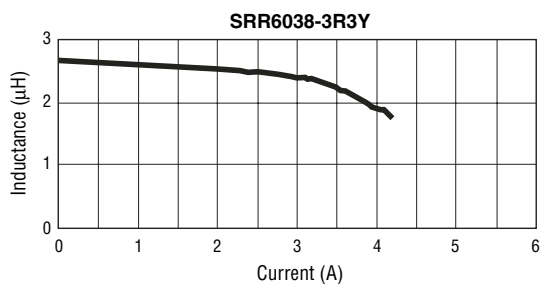


Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

SRR6038 Series - Shielded SMD Power Inductors

BOURNS®

Inductance vs. Current

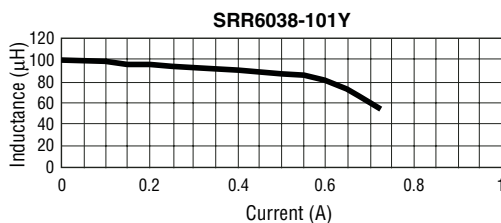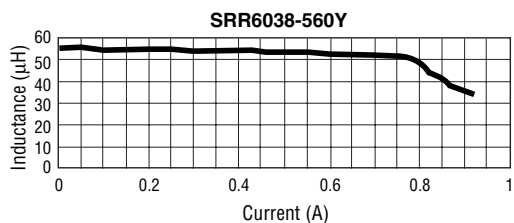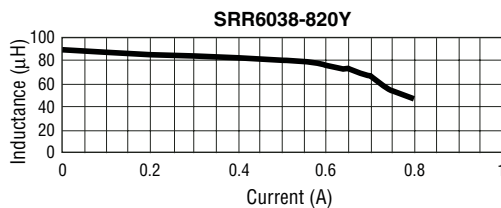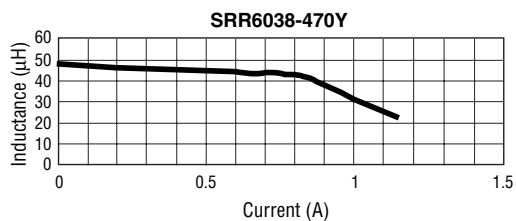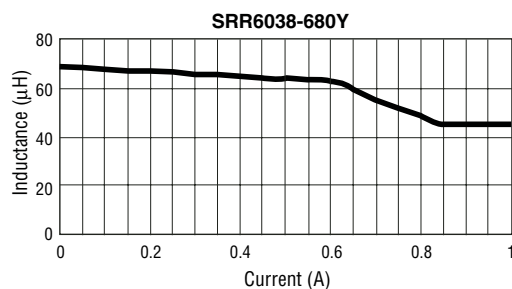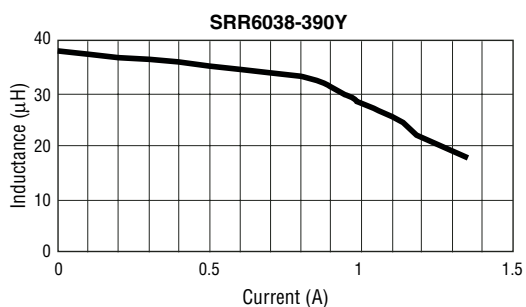

SRR6038 Series - Shielded SMD Power Inductors

BOURNS®

Packaging Specifications

