

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol Commercial Products](#)
[L77DA15SF179](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

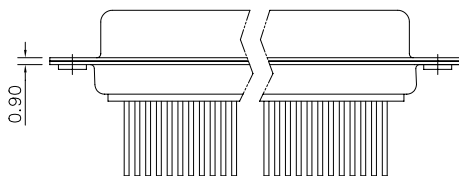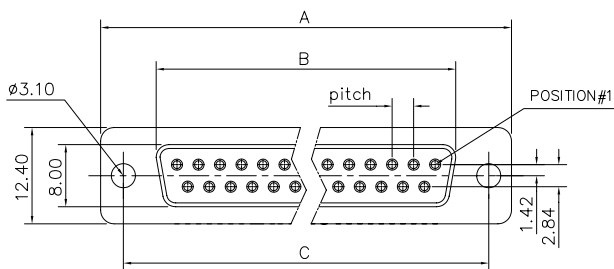

Customer drawing

DIM.S SHELL	A	B	C	Pitch
9	30.70	16.40	25.00	2.74
15	39.00	24.80	33.30	2.74
25	52.90	38.50	47.00	2.77
37	69.20	54.90	63.50	2.77

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
			02/19/08	

D-SUB TECHNICAL DATA

SHELL : Steel 2.5um(100u") min tin over 1.25um(50u") min nickel
 BODY : Glass filled thermoplastic.
 Flame retardant to UL94 V-0 Color Black
 CONTACTS : Brass
 0.1um(4u") min gold over 1.25um(50u") min nickel
 ELECTRICAL : Voltage rating :300 V RMS at 50 Hz
 Current rating 7.5A.
 Insulation resistance >5000 M Ohms
 Contact resistance 20 mOhms max.
 CLIMATIC : Temperature range -55 °C up to 85°C
 Damp heat 21 days(40 °C-95% HR)
 MARKING : Amphenol-...(Series No.)
 Commercial reference
 Manufacturing date

PRODUCT CODE

L 77D X XX S F179

L: RoHS Compliance	Termination: Wire wrap: F179=length 9.60mm
77D: tinned shell for receptacle	Contact type: S: Socket
Shell Size: E,A,B,C	Configuration: 09,15,25,37

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL	DATE	Amphenol	
U.S. METRIC		DRAWN	02/19/08		
X +/- 0.50		CHECKED	02/19/08	TITLE machined contacts connector, D series	
XX +/- 0.30		CHECKED	02/19/08		
XXX +/- 0.20		DRAWING FILE :			SIZE A4
FRACTIONS		REMOVE SHARP EDGES			DRAWING NO. C L77DXXXSFY79
ANGLES +/- 5°		DIMENSIONS			SCALE NONE
FOR MATERIALS AND FINISHES SEE NOTES		ANGLE OF PROJECTION			SHEET 1 OF 1
U.S. INCHES		METRIC MM			REV. 1