

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)
[AT-K-C-26-6-S/10](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

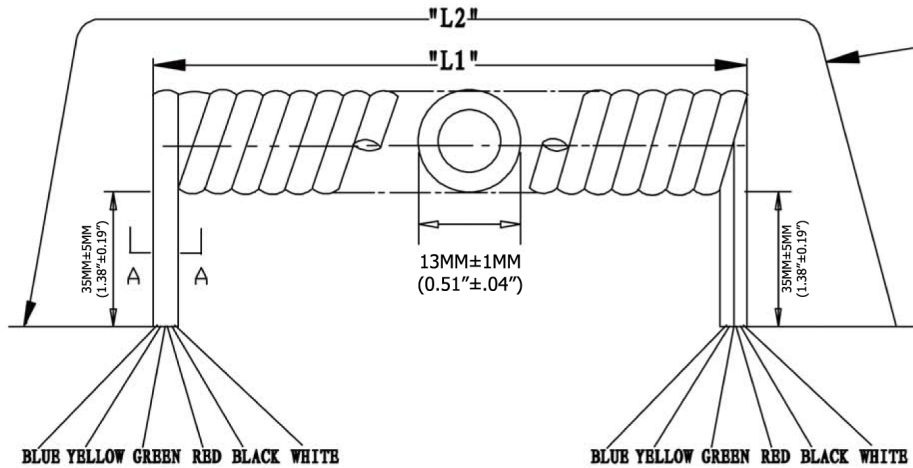

Extended length is with 500g of force

Materials:

- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag



SEC: A=A

Extended Length ("L2")	Typical Retracted Length ("L1")
120.0 Inches - 138.0 Inches	39.5 Inches
3,048.0MM-3,505.2MM	1,003.3MM

RoHS
Compliant

ITEM NO

AT-K-C-26-6-S/10

TITLE NON-UL 26AWG (0.16/7)*6C, O.D.: 2.4*6.8MM
Pre-Cut, 10FT., SILVER

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED

©Copyright 2009 by Assmann Electronic Components
All International Rights Reserved