

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)


[AT-K-C-26-8-S/14](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

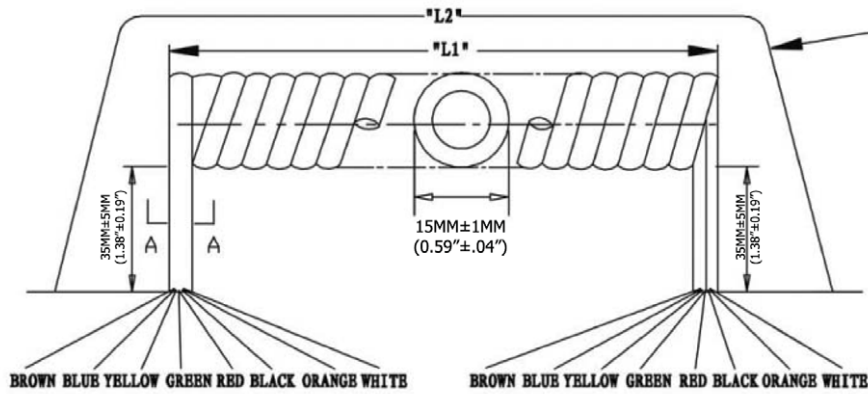

Extended length is with 500g of force



SEC: A-A

Extended Length ("L2")	Typical Retracted Length ("L1")
168.0 Inches - 193.2 Inches	78.0 Inches
4,267.2MM - 4,907.28MM	1,905.0MM

Material:

- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X43): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

Electrical:

- Voltage rating: 30V (DC)

[illegible]

Item No.	
----------	--

AT-K-C-26-8-S/14

	Title
--	-------

NON-UL 26AWG (0.16/7)*8C, O.D.: 2.4*8.8MM,
Pre-Cut, 14 Ft., Silver

Drawing No.

rev00

Replace

Sheet

RoHS Complaint

