

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[US Sensor](#)
[ST2R510B](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

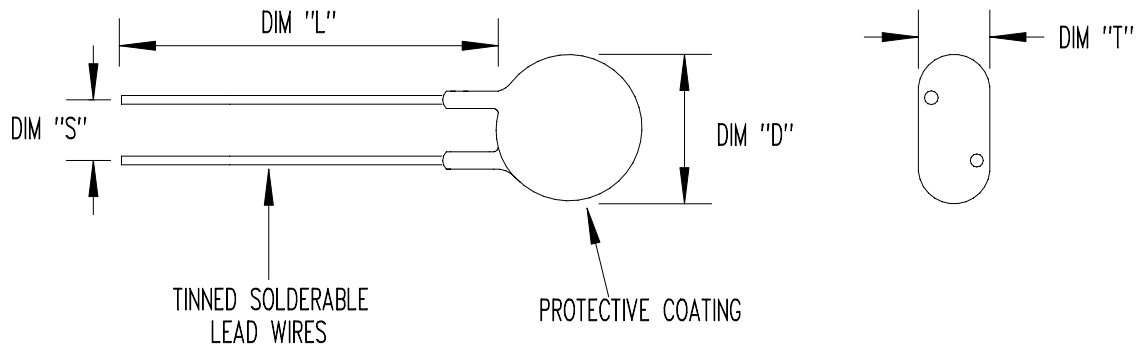

RESISTANCE @ +25°C = 2.5 Ω ± 20%
 MAXIMUM STEADY STATE CURRENT = 10 AMPS
 RESISTANCE @ MAXIMUM CURRENT = 0.04 Ω NOMINAL
 DIM "D" = 1.200" MAXIMUM
 DIM "T" = 0.300" MAXIMUM
 DIM "L" = 0.900" MINIMUM
 DIM "S" = 0.310" NOMINAL
 LEAD GAUGE = 18 AWG (0.040" DIAMETER)

SEE MANUFACTURING SPECIFICATION (LAYER 1)

"A"	DIM "D" WAS 0.900" MAXIMUM & DIM "L" WAS 1.0" MINIMUM	07/14/09	DD
---	ISO RELEASE	04/15/03	DD
REV	REVISION RECORD	DATE	APP

SCALE	NONE	U.S. SENSOR CORP. 1832 W. COLL INS AVE. ORANGE, CA. 92867 714-639-1000 www.ussensor.com INRUSH CURRENT LIMITER P/N ST2R510B
DRAWN BY	T. SOMERVILLE	
DATE	02/14/90	
REV.	"A"	
LAYER	0 OF 2	