

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[TE Connectivity Raychem Circuit Protection
MLV0402-180-E030](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



308 Constitution Drive
Menlo Park, CA 94025-1164
Phone: 800-227-4856
www.circuitprotection.com

Multi Layer Varistor Overvoltage Protection Device

Raychem Circuit Protection Products

PRODUCT: MLV0402-180-E030

DOCUMENT: SCD 26838
PCN: RF0902
REV LETTER: C
REV DATE: AUGUST 10, 2007
PAGE NO.: 1 OF 5

GENERAL DESCRIPTION


These Multi Layer Varistors are small, leadless, surface mount packages made of multiple layers of Zinc Oxide, with electrodes between them. They are used to help protect integrated circuits and other sensitive equipment. Their small size is ideal for high density printed circuit boards. The "E" series is a family of low capacitance parts, specifically designed for ESD protection of high data rate applications.

BENEFITS

- Minimal signal distortion
- Help to protect sensitive equipment against typical ESD events
- Cost efficient assembly and protection
- Resistance to standard wave solder fluxes, provides excellent solderability
- Space savings
- Longer battery life due to low leakage current

FEATURES

- Low capacitance
- Bidirectional clamping
- Compatible with standard surface mount methods
- Low and stable leakage current
- Low clamping voltage
- Quick response time (<1ns)
- High transient current capability
- RoHS Compliant

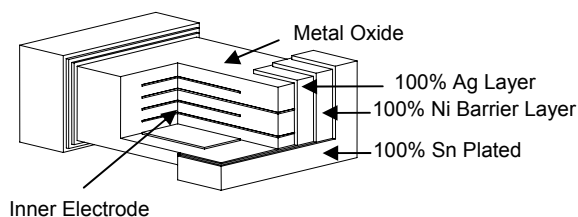

APPLICATIONS

ESD protection of:

- High speed computer I/O ports and interfaces (USB, IEEE 1394, etc...)
- Portable devices
- Telecom equipment

SYMBOL



MATERIALS INFORMATION

ROHS Compliant

Directive 2002/95/EC
Compliant

ELV Compliant

Directive 2000/53/EC
Compliant



308 Constitution Drive
Menlo Park, CA 94025-1164
Phone: 800-227-4856
www.circuitprotection.com

Multi Layer Varistor Overvoltage Protection Device

Raychem Circuit Protection Products

PRODUCT: MLV0402-180-E030


DOCUMENT: SCD 26838
PCN: RF0902
REV LETTER: C
REV DATE: AUGUST 10, 2007
PAGE NO.: 2 OF 5

Ratings @ (25± 5°C)

	Maximum Working Voltage	Typical Clamping Voltage	Leakage Current	Typical Capacitance
Symbol	V_{DC}	V_C^1	I_L	C_p
Units	V (Max)	V	μA (Max)	pF
Test Conditions	< 10 μA	ESD @ 8kV	@12V	@ 1MHz
MLV0402-180-E030	18	350	<1	3

Note 1: Measured during IEC61000-4-2, 8kV contact discharge, 30 ns after initiation of the ESD pulse.

PART NUMBERING

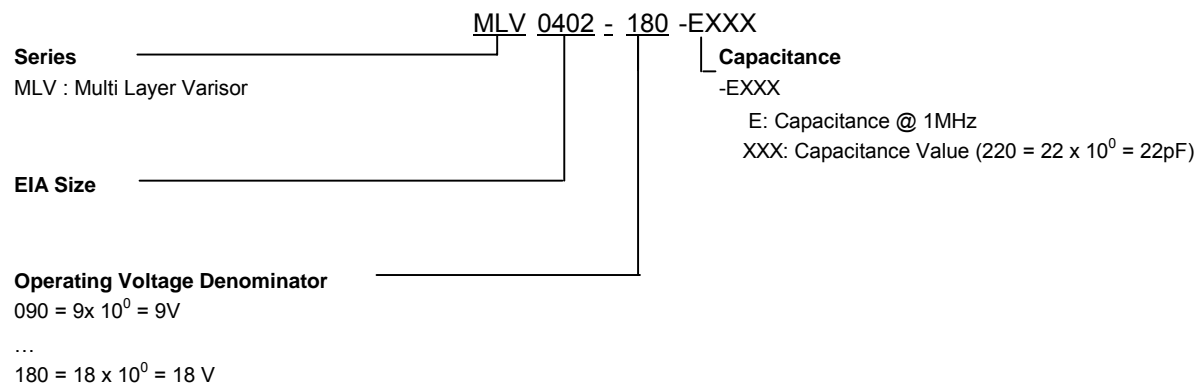

GENERAL CHARACTERISTICS

Operating Temperature: -40 to +85°C

Storage Temperature: -40 to +85°C

ENVIRONMENTAL CHARACTERISTICS

Characterisitcs	Specifications	Test Conditions
Bias Humidity	$\Delta V_v / V_v \leq \pm 10\%$	90% RH, 40°C, maximum working Voltage V_{DC} , 1000 hours
Thermal Shock	$\Delta V_v / V_v \leq \pm 10\%$	-40°C to + 85°C, 30 min. cycle, 5 cycles
Full Load Voltage	$\Delta V_v / V_v \leq \pm 10\%$	Maximum working Voltage V_{DC} , 85°C, 1000 hours
Solderability	95 % Coverage	230°C, 3s
Solder Heat Resistance	90% Coverage	260°C, 10s



308 Constitution Drive
Menlo Park, CA 94025-1164
Phone: 800-227-4856
www.circuitprotection.com


Multi Layer Varistor Overvoltage Protection Device

Raychem Circuit Protection Products

PRODUCT: MLV0402-180-E030

DOCUMENT: SCD 26838
PCN: RF0902
REV LETTER: C
REV DATE: AUGUST 10, 2007
PAGE NO.: 3 OF 5

DIMENSIONS

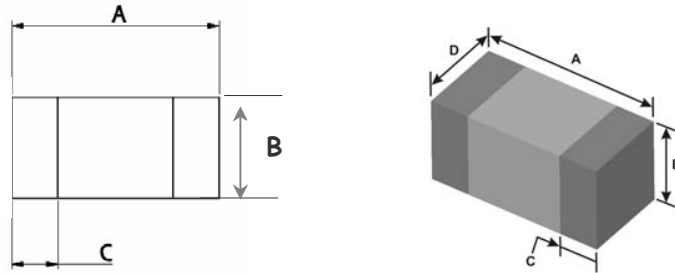


Drawing Not To Scale

	length A		Height B		Terminal Width C		Width D	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	0.85	1.15	0.4	0.6	0.1	0.4	0.4	0.6
in*:	(0.033)	(0.045)	(0.016)	(0.024)	(0.004)	(0.016)	(0.016)	(0.024)

* Rounded off approximation

RECOMMENDED PAD LAYOUT

Print solder with a thickness of 150 to 200µm

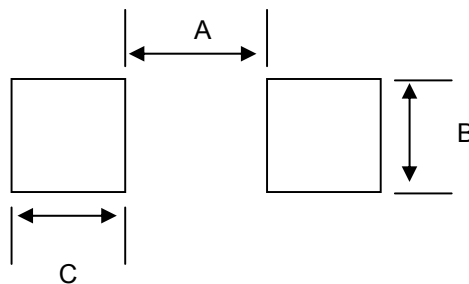

	A	B	C
mm:	0.35	0.75	0.85
in*:	(0.014)	(0.030)	(0.033)

* Rounded off approximation



308 Constitution Drive
Menlo Park, CA 94025-1164
Phone: 800-227-4856
www.circuitprotection.com


Multi Layer Varistor Overvoltage Protection Device

Raychem Circuit Protection Products

PRODUCT: MLV0402-180-E030


DOCUMENT: SCD 26838
PCN: RF0902
REV LETTER: C
REV DATE: AUGUST 10, 2007
PAGE NO.: 4 OF 5

SOLDER REFLOW RECOMMENDATIONS

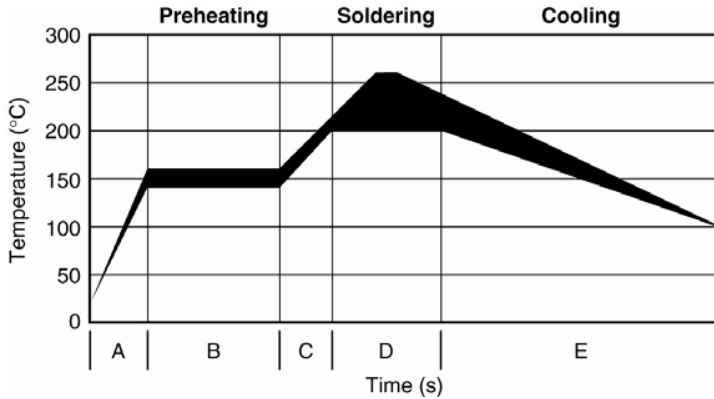


A	Temperature ramp up 1	From ambient to Preheating temperature	30s to 60s
B	Preheating	140°C - 160°C	60s to 120s
C	Temperature ramp up 2	From preheating to Main heating temperature	20s to 40s
D	Main Heating	at 200°C	60s ~ 70s
		at 220°C	50s ~ 60s
		at 240°C	30s ~ 40s
		at 260°C	5s ~ 10s
E	Cooling	From main heating temperature to 100°C	max 4°C/s

PACKAGING

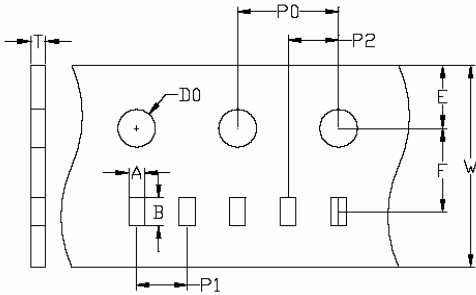

	A		B		W		E		F		P0		P1		P2		D0		T	
mm	0.59	0.65	1.09	1.15	7.7	8.3	1.7	1.8	3.45	3.55	3.9	4.1	1.95	2.05	1.95	2.05	1.4	1.6	0.55	0.65
inch*	0.023	0.025	0.042	0.045	0.303	0.326	0.066	0.070	0.135	0.139	0.153	0.161	0.076	0.080	0.076	0.080	0.055	0.062	0.021	0.025

*Rounded off approximation

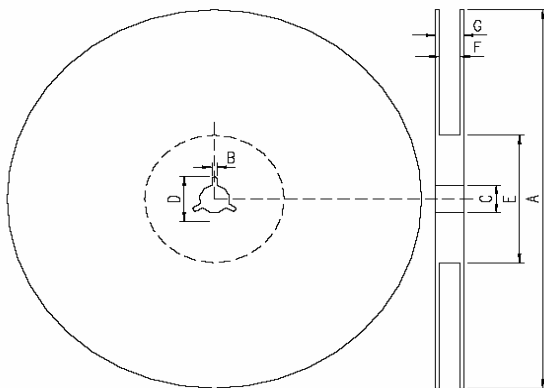

A	178.0±2.0
B	2.0±0.5
C	13.0±0.5
D	21.0±0.8
E	62.0±1.5
F	9.0±0.5
G	13.0±1.0



308 Constitution Drive
Menlo Park, CA 94025-1164
Phone: 800-227-4856
www.circuitprotection.com

Multi Layer Varistor Overvoltage Protection Device

Raychem Circuit Protection Products

PRODUCT: MLV0402-180-E030

DOCUMENT: SCD 26838
PCN: RF0902
REV LETTER: C
REV DATE: AUGUST 10, 2007
PAGE NO.: 5 OF 5

RECOMMENDED STORAGE CONDITIONS

Storage time: 12 months max
Storage temperature: 5 to 40°C
Storage Relative humidity: 65% max

POST REFLOW, CLEANING CONDITIONS

A 5% saponifier combined with water during wash.

For Ultrasonic process water temperature should be at 50°C and board should be submerged for a minimum of one minute in the solutions, then rinse and dry.

For in-line washing, the temperature of the water sprayed should be at 110°C, rinse and drying is done in-line.

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of each product for their applications. Tyco Electronics Corporation assumes no responsibility for the use of its product or for any infringement of patents or other rights of third parties resulting from the use of its product. No license is granted by implication or otherwise under any patent or proprietary right of Tyco Electronics except the right to use such product for the purpose for which it is sold. Tyco Electronics reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product. This publication supersedes and replaces all information previously supplied. Without expressed or written consent by an officer of Tyco Electronics, Tyco Electronics does not authorize the use of any of its products as components in nuclear facility applications, aerospace, or in critical life support devices or systems. Tyco Electronics' only obligations are those in the Tyco Electronics Standard Terms and Conditions of Sale and in no case will Tyco Electronics be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.