

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[IXYS Corporation](#)

[DHG30IM600PC](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



DHG 30 IM 600 PC



advanced

Sonic Fast Recovery Diode

High Performance Fast Recovery Diode
Low Loss and Soft Recovery
Single Diode

Part number

DHG 30 IM 600 PC



Backside: cathode

Features / Advantages:

- Planar passivated chips
- Very low leakage current
- Very short recovery time
- Improved thermal behaviour
- Very low I_{RM} -values
- Very soft recovery behaviour
- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low I_{RM} reduces:
 - Power dissipation within the diode
 - Turn-on loss in the commutating switch

Applications:

- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode
- Rectifiers in switch mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)

Package:

- Housing: TO-263 (D2Pak)
- Industry standard outline
- Epoxy meets UL 94V-0
- RoHS compliant

Ratings

Symbol	Definition	Conditions	min.	typ.	max.	Unit
V_{RRM}	max. repetitive reverse voltage	$T_{VJ} = 25^{\circ}\text{C}$			600	V
I_R	reverse current	$V_R = 600\text{V}$ $T_{VJ} = 25^{\circ}\text{C}$			50	μA
		$V_R = 600\text{V}$ $T_{VJ} = 125^{\circ}\text{C}$			5	mA
V_F	forward voltage	$I_F = 30\text{A}$ $T_{VJ} = 25^{\circ}\text{C}$			2.37	V
		$I_F = 60\text{A}$			3.18	V
		$I_F = 30\text{A}$ $T_{VJ} = 150^{\circ}\text{C}$			2.22	V
		$I_F = 60\text{A}$			3.11	V
I_{FAV}	average forward current	rectangular $d = 0.5$ $T_C = 95^{\circ}\text{C}$			30	A
V_{FO}	threshold voltage	$T_{VJ} = 150^{\circ}\text{C}$ for power loss calculation only			1.31	V
r_F	slope resistance				29.2	$\text{m}\Omega$
R_{thJC}	thermal resistance junction to case				0.60	K/W
T_{VJ}	virtual junction temperature		-55		150	$^{\circ}\text{C}$
P_{tot}	total power dissipation	$T_C = 25^{\circ}\text{C}$			210	W
I_{FSM}	max. forward surge current	$t = 10\text{ ms}$ (50 Hz), sine $T_{VJ} = 45^{\circ}\text{C}$			200	A
I_{RM}	max. reverse recovery current	$T_{VJ} = 25^{\circ}\text{C}$		12		A
		$I_F = 35\text{A}; V_R = 400\text{V}$ $T_{VJ} = ^{\circ}\text{C}$		tbd		A
t_{rr}	reverse recovery time	$-di_F/dt = 600\text{ A}/\mu\text{s}$ $T_{VJ} = 25^{\circ}\text{C}$		35		ns
		$T_{VJ} = ^{\circ}\text{C}$		tbd		ns
C_J	junction capacitance	$V_R = 400\text{V}; f = 1\text{ MHz}$ $T_{VJ} = 25^{\circ}\text{C}$		16		pF



DHG 30 IM 600 PC


advanced

Symbol	Definition	Conditions	Ratings			Unit
			min.	typ.	max.	
I_{RMS}	RMS current	per pin ¹⁾			35	A
R_{thCH}	thermal resistance case to heatsink			0.25		K/W
T_{slg}	storage temperature		-55		150	°C
Weight				2		g
F_c	mounting force with clip		20		60	N

¹⁾ I_{RMS} is typically limited by: 1. pin-to-chip resistance; or by 2. current capability of the chip.

In case of 1, a common cathode/anode configuration and a non-isolated backside, the whole current capability can be used by connecting the backside.

Product Marking

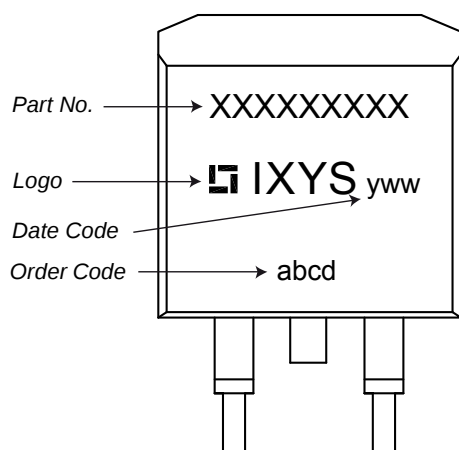


Part number

D = Diode
H = Sonic Fast Recovery Diode
G = extreme fast
30 = Current Rating [A]
IM = Single Diode
600 = Reverse Voltage [V]
PC = TO-263AB (D2Pak) (2)

Ordering	Part Name	Marking on Product	Delivering Mode	Base Qty	Code Key
Standard	DHG 30 IM 600 PC	DHG30IM600PC	Tape & Reel	800	503501

Similar Part	Package	Voltage Class
DHG30I600PA	TO-220	600
DHG30I600HA	TO-247	600

Outlines TO-263 (D2Pak)

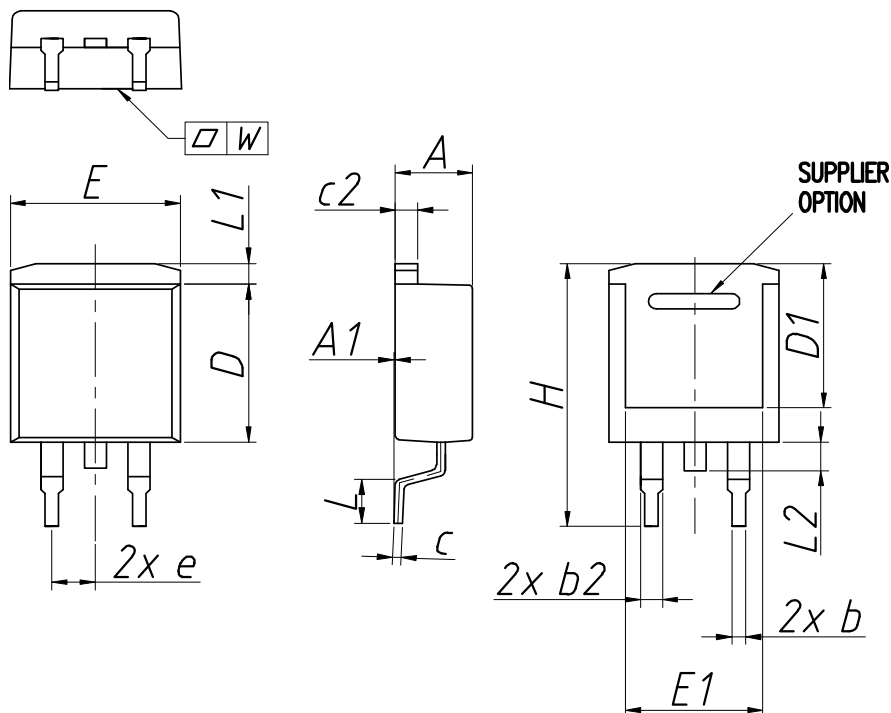

Dim.	Millimeter		Inches	
	min	max	min	max
A	4.06	4.83	0.160	0.190
A1	typ. 0.10		typ. 0.004	
b	0.51	0.99	0.020	0.039
b2	1.14	1.40	0.045	0.055
c	0.40	0.74	0.016	0.029
c2	1.14	1.40	0.045	0.029
D	8.38	9.40	0.330	0.370
D1	8.00	8.89	0.315	0.350
E	9.65	10.41	0.380	0.410
E1	6.22	8.13	0.245	0.320
e	2.54 BSC		0.100 BSC	
H	14.61	15.88	0.575	0.625
L	1.78	2.79	0.070	0.110
L1	1.02	1.68	0.040	0.066
L2	1.02	1.52	0.040	0.060
W	typ. 0.02	0.040	typ. 0.0008	0.0016

All dimensions conform with and/or are within JEDEC standard.