Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

APM Hexseal HE1070

For any questions, you can email us directly: sales@integrated-circuit.com



Distributor of APM Hexseal: Excellent Integrated System Limited

Datasheet of HE1070 - BOOT CIRCUIT BREAKER 3POLE CLEAR

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

SPECIFICATION

Material: Boot: APM RUBRGLAS ™ (transparent silicone rubber), conforms to A-A-59588, Class III Grade 50, Frame: steel, zinc plated with chromate finish. Screw: SEELSKREW ® (self-sealing screws), stainless steel with silicone rubber O-ring.

Temperature Range: HEXSEAL: -94°F to +400°F Pressure Range: Dust tight and splashproof.

Operational Life: 10,000 actuations (minimum).

Shelf Life: Excess of 25 years.

Resistant to: Salt spray, sunlight, ozone, weather, corona and most

acids.


Notes:

1. Mounting screws are supplied in lengths shown unless otherwise specified.

2. New sizes and types of RUBRGLAS-SEELS ® are being added regularly. Please request other types and styles as required. **Agency Recognition:** Front Panel mounted Circuit Breaker Boots are UL- listed to UL Std. 50, types 1,2,3,12,12K and 13.

Back-of-Panel mounted Circuit Breaker boots are UL-listed to UL

Std. 50, type 1, Also meet CSA standards.

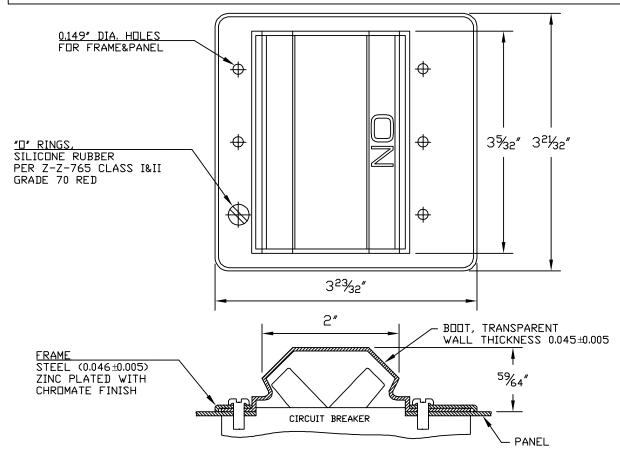

NOTES:

ASSEMBLY CONSISTS OF 1 BOOT, MAT'L APM RUBRGLAS ®, 1 FRAME
MAT'L C.R.S. ZINC PLATED WITH CHROMATE FINISH, &6#6-32 APM SEELSKREWS ® LENGTH =3/8
UNLESS OTHERWISE SPECIFIED

TOLERANCES: UNLESS OTHERWISE NOTED $\pm 1/32$

J	J RUBBER and FRAME MAT'L CHANGED, WALL THICKNESS TOL. 0.010 CHANGED TO 0.005, HEIGHT DIM. 26/64" CHANGED TO 59/64", DELETED TO "DESIGN TO MEET MIL-5423/14-03" and DELETED TO SEELSKREW INFORMATION			05.05.09
	I CAD COMPUTER GENERATED H REDRAWN			11.13.02
Н	REDRAWN	EDRAWN		
REV.		DESCRIPTION		
MAXIMUM	AND MINIMUM MEASURE-	ப் CIRCUIT BREAKER BOOT, ENG.	M.M.	
MAXIMUM AND MINIMUM MEASURE- MENTS ARE STATED DIRECTLY ON EACH DIMENSION.		≓ TOGGLE, WIDE ANGLE, DWN.	J.P.	07.02.59
	JBRGLASS ①	TRANSPARENT (3 POLES) CHKD.		
CONFORMS TO A-A-59588 CL III		SCALE 9	HE-1070	
FINISH: GRADE 50				
TRANSPARENT		APINI-HEXSEAL CORPORATION 3/4:1		