

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[95009-2661](#)




For any questions, you can email us directly:

sales@integrated-circuit.com


NOTES :

1- MATERIAL : POLYESTER FIBER GLASS FILED 94-V-0
COLOR BLACK .
TERMINAL : COPPER ALLOY.
PLATINGS : BASE FINISH: NICKEL
CONTACT SURFACE FINISH:
GOLD
OR
GOLD FLASH OVER PALLADIUM NICKEL.
EXCEEDS PRODUCT REQUIREMENTS BASED ON PS-95009-001

- 2- PC BOARD THICKNESS : 1.57
3- JACK FOR MATING WITH IEC-60603-7 AND TIA-1096-A
MOLEX 90075 SERIES PLUGS
4- PRODUCT SPECIFICATION PS-95009-001.
5- APPLICATION SPECIFICATION AS-95001.
6- PACKAGING SPECIFICATION PK-95029.
7- MANUFACTURING ID CAN BE MXF, MG OR MXI.
INSPECTION NUMBERS USED: 1 - 50
LAST INSPECTION NUMBER: 15

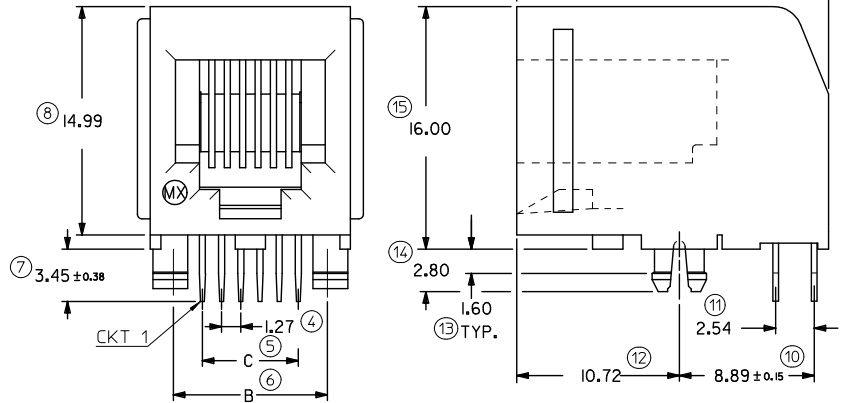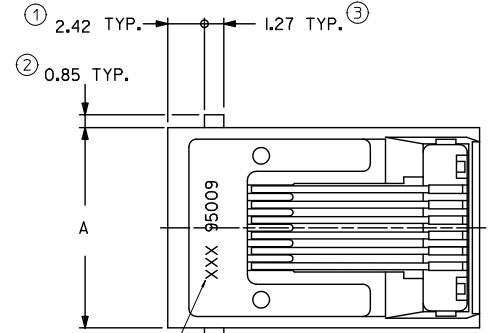

MOUNTING HOLE PATTERNS
(SEE FROM COMPONENT SIDE)

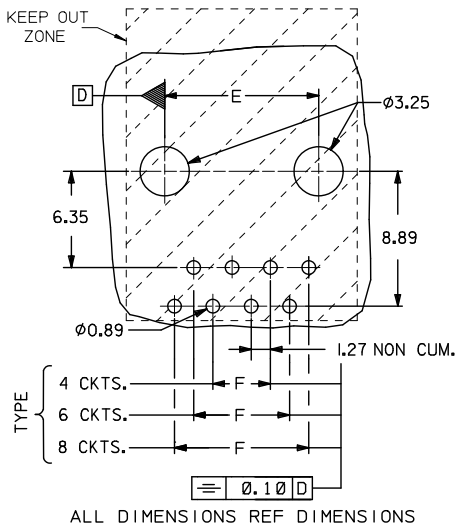

EDITED NOTES EC NO: IPG2017-0807 DRAWN BY: SNE CHKD BY: SMCREEVEY APPR: EFLAN 2012/04/27 2012/05/03	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION			
					MM ONLY		4:1	METRIC				
				mm	INCH	DRAWN BY	DATE	TITLE				
			4 PLACES	±---	±---	DP	86/10/23	FLUSH MOUNT RIGHT ANGLE				
			3 PLACES	±---	±---	CHECKED BY	DATE	MODULAR JACK ASSEMBLY				
			2 PLACES	±0.25	±---	APPROVED BY		DATE	THROUGH HOLE VERSION			
			1 PLACE	±0.35	±---							
			ANGULAR ±1/2°						MOLEX INCORPORATED			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART SHT 2		SDA-95009-F		1 OF 2			
					SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

FLUSH MOUNT RIGHT ANGLE
MODULAR JACK ASSEMBLY
THROUGH HOLE VERSION

MOLEX INCORPORATED

DOCUMENT NO. SDA-95009-F

SHEET NO. 1 OF 2


10 9 8 7 6 5 4 3 2 1

PART NUMBERS FOR JACK I RIB .

	TYPE	POS. 4	TOOLED	POS. 6	TOOLED	POS. 6	TOOLED	POS. 8	TOOLED
		4 CKTS.	TOOLED	4 CKTS.	TOOLED	6 CKTS.	TOOLED	8 CKTS.	TOOLED
		95009-7441	X	95009-7641	X	95009-7661	X	95009-7881	X

PART NUMBERS FOR JACK NO RIB.

	TYPE	POS. 4	TOOLED	POS. 6	TOOLED	POS. 6	TOOLED	POS. 8	TOOLED
		4 CKTS.	TOOLED	4 CKTS.	TOOLED	6 CKTS.	TOOLED	8 CKTS.	TOOLED
		95009-7447	X	95009-7647	X	95009-7667	X	95009-7887	X

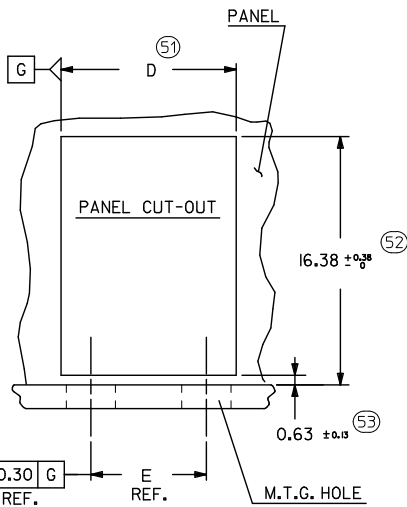

TYPE DIM.	POS. 4	POS. 6		POS. 8
	4 CKTS.	4 CKTS.	6 CKTS.	8 CKTS.
A	11.18	13.21	13.21	15.24
B	7.62	10.16	10.16	11.43
C	3.81	3.81	6.35	8.89
D ± 0.38	11.56	13.59	13.59	15.62
E ± 0.10	7.62	10.16	10.16	11.43
F ± 0.10	3.81	3.81	6.35	8.89

NOTES:

INSPECTION NUMBERS USED: 51 - 100
LAST INSPECTION NUMBER: 53

ADDED PLATING OPTIONS EC NO: E2012-0040 DRAWN: JOCORROR 2011/04/07 CHKD: APPRIEFOLAN 2011/10/13 REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		mm	INCH		DRAWN BY DP	DATE 87/04/22			
		4 PLACES ± ---	± ---		CHECKED BY	DATE			
		3 PLACES ± ---	± ---						
		2 PLACES ± 0.25	± ---						
		1 PLACE ± 0.35	± ---						
		ANGULAR ± 1/2°			APPROVED BY	DATE			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.	SEE CHART	DOCUMENT NO.	SDA-95009-F	SHEET NO. 2 OF 2
					SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

FLUSH MOUNT RIGHT ANGLE
MODULAR JACK ASSEMBLY
THROUGH HOLE VERSION

MOLEX INCORPORATED

9 8 7 6 5 4 3 2 1