

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[TE Connectivity AMP Connectors](#)
[869546-1](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRINTING MADE IN THISED ANGLE PROJECTION
 THIS DRAWING IS UNCONTROLLED - RELEASED FOR PUBLICATION
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	APPD
Q	PLS WAS 91-4163-003-01, NPR 3876	2-92	DM	
A	REVISED EN 869546	05/94	DF	
B	REV PER EC 0020-492-93	06/94	MP	
C	REV PER EC 0020-600-93	06/94	PR	
D	REV PER EC 0020-790-95	06/95	RF	
E	REVISED PER EC 0420-885-97	06/97	JV	
F	REV PER EC 051A-0168-00	06/98	MG	

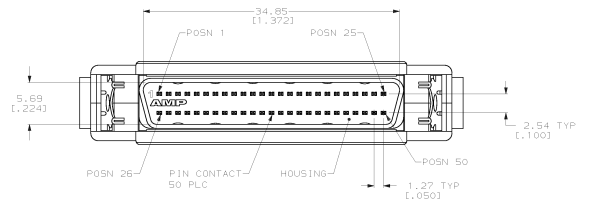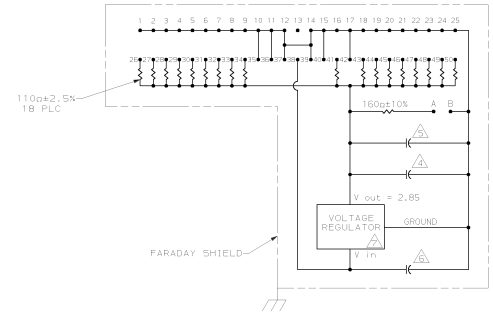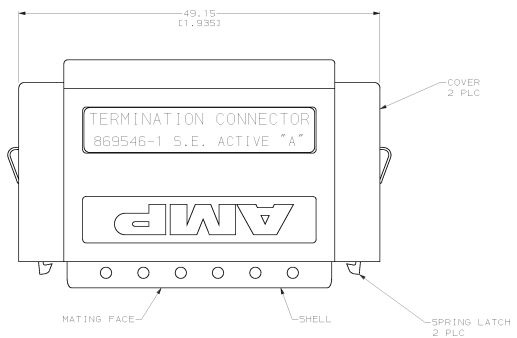

- △ SHELL: CARBON STEEL, PIN CONTACT: PHOSPHOR BRONZE, HOUSING: POLYESTER, BLACK, RESISTOR NETWORK, THICK FILM RESISTOR COMPOSITION ON ALUMINA SUBSTRATE, SPRING LATCH: STAINLESS STEEL, COVER: ABS, GRAY, UL 94V-0 RATED.
- △ 5.08µmL.0002000 MIN TIN-NICKEL OVER 1.27µmL.0000500 MIN COPPER.
- △ 0.76µmL.0003000 MIN GOLD FOR A LENGTH OF 3.35 (1.32) MIN FROM MATING END OVER 1.27µmL.0000500 MIN NICKEL.
- △ 22µF TANTALUM CAPACITOR ±20%, 10V MIN.
- △ 0.1µF CERAMIC CAPACITOR ±20%, 25V MIN.
- △ 4.7µF TANTALUM CAPACITOR ±20%, 15V MIN.
- △ VOLTAGE REGULATOR TO MEET ALL SCSI SINGLE-ENDED ACTIVE REQUIREMENTS.

869546-1		PART NO	
DO NOT SCALE PRINT.	DR 1-22-92	AMP Incorporated Harrisburg, PA 17115-3608 PLUG ASSEMBLY, 50 POSITION, .050 SERIES AMPLIMITE™, TERMINATOR	
UNLESS SPECIFIED	CHK 2-1-92		
DIMENSIONS IN MM (INCHES)	R 3/10/92		
TOLERANCES UNLESS SPECIFIED	APPR 4-13-92		
0.25 (0.010)	D DETAGMT	DATE	
0.125 (0.005)	J FULCRINI	PRODUCT SPEC	
0.075 (0.003)		APPLICATION SPEC	
0.050 (0.002)		SIZE	00779
		SCALE	4:1
		CAGE CODE	869546
		DRWG NO	869546
		SHEET	1 OF 1