

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Littelfuse](#)
[02200010MXP](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PART NUMBER	AMPS/VOLTS	CATALOG NUMBER	DESCRIPTION	UPC CODE	LOGO	LOGO	UL LISTED	UL LISTED	UL LISTED	UL LISTED	UL LISTED	DATE	REVISION	CHK	APD
02200010MXP	.550 250	220010P	FUSE 250V SB PT 2AG Pb-FREE .550	079458 91943	YES	YES	35A 250V AC 10,000A 125V AC	YES	YES	YES	YES	02/14/05	61615 - RELEASED	PJM	
												06/20/06	84938D-DLT 580219 & 580460 ADD C580933	PJM	

ELECTRICAL CHARACTERISTICS	
CURRENT	BLOW TIME
.9 AMP.	90 SECONDS MAX.
.825 AMP.	15 MINUTES MAX.
.55 AMP.	4 HOURS MIN.

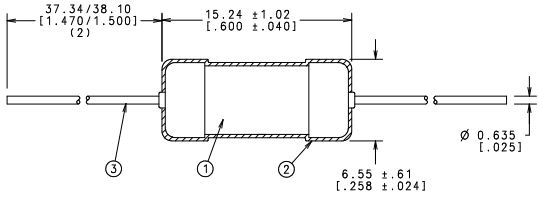

- NOTE:
- ASSEMBLE SLEEVE ON FUSE USING SERPENTINE HEATERS TO DIRECT A CONTINUOUS FLOW OF HOT AIR ON SLEEVE UNTIL SHRUNK. SLEEVE MUST BE CLEAR, FREE OF ANY DISCOLORATION AFTER SHRINKING.
 - COLD RESISTANCE LIMITS: -.416Ω - .574Ω
 - CAP TO LEAD WELD SHALL WITHSTAND A PULL OF 10 LBS. WITHOUT SEPARATING.
- FUSE WILL WITHSTAND
- 29.4A., 1KV., 10x1000 MICRO SECONDS, 200 HITS @ 1 MINUTE INTERVAL.
 - 38.9A., 2.1 KV., .2x1000 MICRO SECONDS, 200 HITS @ 1 MINUTE INTERVAL.
- PACK 1000 FUSES IN BOX 580460, SEAL WITH 088120 TAPE.
 - LABEL TO BE APPLIED TO THE END OF THE BOX.

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
-	C580933	CARTON	1	EAD
3	895-195	SLEEVE	1000	EA
2	082706	LEAD WIRE	.482	LB
1	220010W-P	FUSE SUB-ASSEMBLY	1000	EA

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [] ARE INCHES.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

O DENOTES CRITICAL CHARACTERISTICS.

CPK DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE

(ST) DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.

CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

COPIES TO:

NO	DATE	BY	CHK	DATE	BY	CHK	SCALE	DESCRIPTION
1	9 18							FINISH
2	10 19							
3	12 20							
4	13 21	DRW	PJM	02/14/05	SCS		4:1	
5	14 23	CHK						
6	15 33	CHK						
7	16 42	CHK						
B	12 20	CHK						FINISH GOOD W/ GRAMS/PIECE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

FINISH DEC. FRACTION ±

FINISH DEC. ANGULAR ±1°


PROJ. CENTER: 550A "M" PACKED 2AG SLO-BLO WELDED LEADS WITH SHRINK TUBING Pb-FREE

DES PLAINES, ILLINOIS 60016

REVISION: B

DRAW. NO.: 02200010MXP

FINAL



NOTE: LABEL ILLUSTRATION(S) IS FOR REFERENCE ONLY. THE ACTUAL COPY AND REGULATORY MARKINGS WILL VARY BY THE INDIVIDUAL PART NUMBER. SEE CHART.

UNCONTROLLED DRAWING - NO PERMITS ALLOWED

UNCONTROLLED DRAWING - NO PERMITS ALLOWED