

# **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


Wurth Electronics Inc 7446631010

For any questions, you can email us directly: <u>sales@integrated-circuit.com</u>



# **Distributor of Wurth Electronics Inc: Excellent Integrated System Limited** Datasheet of 7446631010 - CHOKE COM MODE 10MH .7A SMD

more than you expect

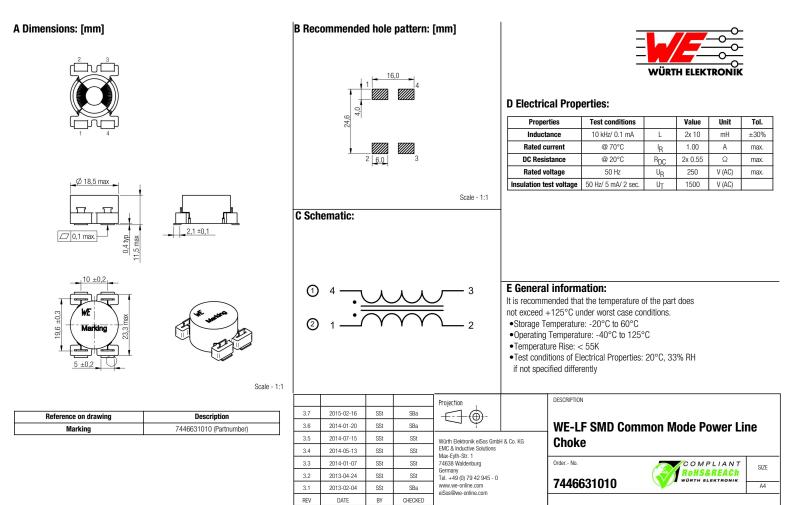


This electronic component has been designed and developed for usage independent of use in metal and adveloped for use in equivalent and index adveloped in their control, thresportation signal, disaster prevention, medical, public information network etc. With Elektronik eSS Graft & 2 Control, transportation signal, disaster prevention, medical, public information network etc. With Elektronik eSS Graft & 2 Control, transportation signal, disaster prevention, medical, public information network etc. With Elektronik eSS Graft & 2 Control, transportation signal, disaster prevention, medical, public information network etc. With Elektronik eSS Graft & 2 Control, transportation signal, disaster prevention, medical, public information network etc. With Elektronik eSS Graft & 2 Control, transportation signal, disaster prevention, medical, public information network etc. With Elektronik eSS Graft & 2 Control, transportation signal, disaster prevention, medical, public information network etc. With Elektronik eSS Graft & 2 Control, transportation signal, disaster prevention, medical, public information network etc. With Elektronik eSS Graft & Control, transportation signal, disaster prevention, medical, public information network etc. With Elektronik eSS Graft & Control, transportation signal, disaster prevention, medical, public information network etc. With Elektronik eSS Graft & Control, transportation signal, disaster prevention, medical, public information network etc. With Elektronik eSS Graft & Control, transportation signal, disaster prevention, medical, public information network etc. With Elektronik etc. and the electronic et






# F Typical Insertion Loss Characteristics:

Test Setup:





Differential Mode


Common Mode

				Projection		DESCRIPTION		
3.7	2015-02-16	SSt	SBa	- <del>[</del> -]-@-				
3.6	2014-01-20	SSt	SBa			WE-LF SMD Cor	nmon Mode Power Liı	1e
3.5	2014-07-15	SSt	SSt	Würth Elektronik eiSos Gmbł	H & Co. KG	Choke		
3.4	2014-05-13	SSt	SSt	EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg				
3.3	2014-01-07	SSt	SSt			Order No.	COMPLIANT	SIZE
3.2	2013-04-24	SSt	SSt	Germany Tel. +49 (0) 79 42 945 - 0			ROHS&REACH	OILL
3.1	2013-02-04	SSt	SBa	www.we-online.com eiSos@we-online.com	7446631010		A4	
REV	DATE	BY	CHECKED	CIGUS/S/WE-UNINE.CUTT				

This electronic component has been designed and developed for usage in general electronic explanment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Will Electronic eds General & Co. KG products are notified edsigned and the composition of the safety standard and reliability standard is approximately in the control, transportation signal, disaster prevention, medical, public information network etc. With Electronic exceptioned have enclued an agreement specifically governing such use. He design - tasjat, in taddition, statificant Healthing enaltation control the test or discuss the prevention of the effect of causts the internet of such usage before the design - tasjat, undice in taddition, statificant Healthing enaltation control, that the effect of causts the internet of such usage before the design - tasjat, undice in the test or discuss the effect of causts the internet of such usage before the design - tasjat, undice in the test or discuss the effect of causts the released to a such as a standard and the internet of such usage before the design - tasjat, undice in the test or discuss the effect of causts the internet of such usage before the design - tasjat, undice in the test or discuss the effect of causts the internet of such usage before the design - tasjat, undice in the test or discuss the effect of causts the internet of such usage before the design - tasjat, undice in the test or discuss the effect of causts the internet of such usage before the design - tasjat, undice in the test or discuss the effect of causts the internet of such usage before the design - tasjat, undice in the test or discuss the effect of causts the internet of such usage before the design - tasjat, undice in the test or discuss the effect of causts the effect of causts the internet of such usage before the desc



more than you expect

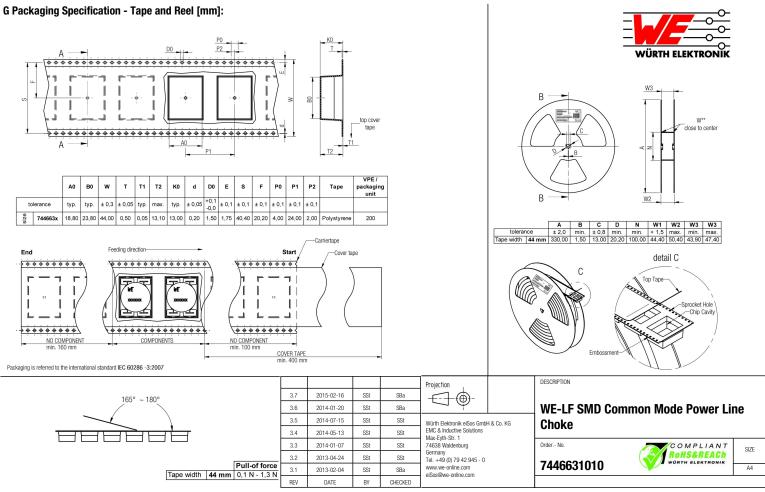


This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially equired or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover With Elektronik edsis Gimit & Co KG products are netified for use in equipment where a higher safety standard and reliability standard is especially equired or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover With Elektronik edsis Gimit & Co KG products are netified for use in equipment where a higher safety standard and reliability standard reliabil



# **H Soldering Specifications:**



# H1: Classification Reflow Profile for SMT components:

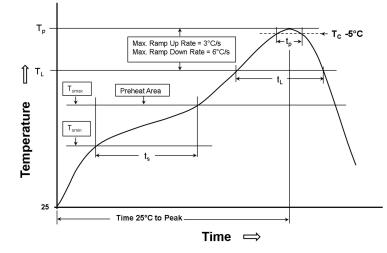

# H2: Classification Reflow Profiles

Profile Feature	Pb-Free Assembly
Preheat - Temperature Min (T <sub>smin</sub> ) - Temperature Max (T <sub>smax</sub> ) - Time (t <sub>3</sub> ) from (T <sub>smin</sub> to T <sub>smax</sub> )	150°C 200°C 60-180 seconds
Ramp-up rate (T <sub>L</sub> to T <sub>P</sub> )	3°C/ second max.
Liquidous temperature (TL) Time (tL) maintained above TL	217°C 60-150 seconds
Peak package body temperature (Tp)	See Table H3
Time within 5°C of actual peak temperature $(t_{p}^{})$	20-30 seconds
Ramp-down rate (Tp to TL)	6°C/ second max.
Time 25°C to peak temperature	8 minutes max.
refer to IDC/ IEDEC   STD 000D	

refer to IPC/JEDEC J-STD-020D

# H3: Package Classification Reflow Temperature

	Package Thickness	Volume mm <sup>3</sup> <350	Volume mm <sup>3</sup> 350 - 2000	Volume mm <sup>3</sup> >2000
PB-Free Assembly	< 1.6 mm	260°C	260°C	260°C
PB-Free Assembly	1.6 - 2.5 mm	260°C	250°C	245°C
PB-Free Assembly	≥ 2.5 mm	250°C	245°C	245°C

refer to IPC/JEDEC J-STD-020D

				Projection		DESCRIPTION			
3.7	2015-02-16	SSt	SBa	-E-1-@-					
3.6	2014-01-20	SSt	SBa	$\Box \circledast$		WE-LF SMD Co	mmon Mode Power Line		
3.5	2014-07-15	SSt	SSt	Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg		Choke			
3.4	2014-05-13	SSt	SSt			UNIORG			
3.3	2014-01-07	SSt	SSt			Order No.	COMPLIANT	SIZE	
3.2	2013-04-24	SSt	SSt	Germany Tel. +49 (0) 79 42 945 - 0	744663		ROHS&REACh	ULL	
3.1	2013-02-04	SSt	SBa	www.we-online.com eiSos@we-online.com				A4	
REV	DATE	BY	CHECKED	elousenve-unime.com					

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Will Execution elsions efficient entities and entits and enti

# I Cautions and Warnings:

The following conditions apply to all goods within the product series of WE-LF SMD of Würth Elektronik eiSos GmbH & Co. KG:

#### General:

All recommendations according to the general technical specifications of the data sheet have to be complied with.

The usage and operation of the product within ambient conditions, which probably alloy or harm the wire isolation, has to be avoided.

If the product is potted in customer applications, the potting material might shrink during and after hardening. The product is exposed to the pressure of the potting material with the effect that the core, wire and termination is possibly damaged by this pressure and so the electrical as well as the mechanical characteristics are endangered to be affected. After the potting material is cured, the core, wire and termination of the product have to be checked if any reduced electrical or mechanical functions or destructions have occurred.

The responsibility for the applicability of customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products do also apply to customer specific products.

Cleaning agents that are used to clean the customer application might damage or change the characteristics of the component, body or termination

Direct mechanical impact to the product shall be prevented as the ferrite material of the core could flake or in the worst case it could break.

#### Product specific:

- Follow all instructions mentioned in the data sheet, especially: The soldering profile has to be complied with according to the technical reflow soldering specification, otherwise this will void the warranty.
- •All products shall be used before the end of the period of 12 months based on the product date code, if not a 100% solderability can't be ensured.
- •Violation of the technical product specifications such as exceeding the nominal rated current will vold the warranty.
  •Due to heavy weight of the component, strong forces and high accelerations might have the effect to damage the electrical connection or to harm the circuit board and will void the warranty.

The general and prodcut specific cautions comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable; however, no responsibility is assumed for inaccuracies or incompleteness

				Projection .		DESCRIPTION			
3.7	2015-02-16	SSt	SBa						
3.6	2014-01-20	SSt	SBa	$\Box \Psi$		WE-LF SMD Cor	nmon Mode Power Lir	ne	
3.5	2014-07-15	SSt	SSt	Würth Elektronik eiSos GmbH & Co. KG		Choke			
3.4	2014-05-13	SSt	SSt	EMC & Inductive Solutions Max-Evth-Str. 1		UNURG			
3.3	2014-01-07	SSt	SSt	74638 Waldenburg		Order No.	COMPLIANT	SIZE	
3.2	2013-04-24	SSt	SSt	Germany Tel. +49 (0) 79 42 945 - 0		7440004040	ROHS&REACH	ULL	
3.1	2013-02-04	SSt	SBa	www.we-online.com eiSos@we-online.com				A4	
REV	DATE	BY	CHECKED	elous@we-unine.com					

electronic component has been designed and developed for usage in general electronic explorment only. This product is not authorized for use in explorment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe parsonal injury or death, unless the parties have executed an agreement specifically governing such use, were Winth Electronic Alcs Graht A Co KG product are not enter designed on interview essence and an agreement specification patients, transportation agriculture, transportation signal, disaster prevention, medical, public information enterview et mini-steps - stage, in advection, sufficient reliability, ministro explored and the estimate in a superimentation explored and the interview of a superimentation explored and the interview of a superimentation estimation agriculture in the advection estimation estimation agriculture in the advection estimation estimat the design-in stage. In addition, sufficient r



more than you expect

# J Important Notes:

## The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

### 1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibi-lity for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications

In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger thrman life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component.

Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

#### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter

#### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected

#### 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a stan-dard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered.

The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

7. Property Rights All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG.

Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

## 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

				Projection .		DESCRIPTION			
3.7	2015-02-16	SSt	SBa						
3.6	2014-01-20	SSt	SBa	$\Box $		WE-LF SMD Con	nmon Mode Power Line		
3.5	2014-07-15	SSt	SSt	Würth Elektronik eiSos GmbH & Co. KG		Choke			
3.4	2014-05-13	SSt	SSt	EMC & Inductive Solutions Max-Evth-Str. 1					
3.3	2014-01-07	SSt	SSt	74638 Waldenburg		Order No.	COMPLIANT	SIZE	
3.2	2013-04-24	SSt	SSt	Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com			ROHS&REACH	OILL	
3.1	2013-02-04	SSt	SBa			7446631010 <b>WORTH ELEKTRONIK</b>		A4	
REV	DATE	BY	CHECKED	eidus wwe-unine.com					

Her safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use, transportation (automotive control, train control, stan portation signal, disaster prevention, medical, public information network etc... Wurth Elektronik eSos GmbH & Co KG must be informed about the internit of such usage before in pills safety and reliability functions or performance. schronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a high er Wüht Bedromik eScs Brinh # & Dx KS products are neither designed non intended for use in areas such as military, aerospace, avlation, nuchair control, submarint gin-stage, in addinio, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that reg

