

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CTS Electronic Components](#)

[CV31B110](#)



For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

**MARKETING SALES DRAWING**


**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

ALL METAL PARTS SILVER PLATED




This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

**Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.**

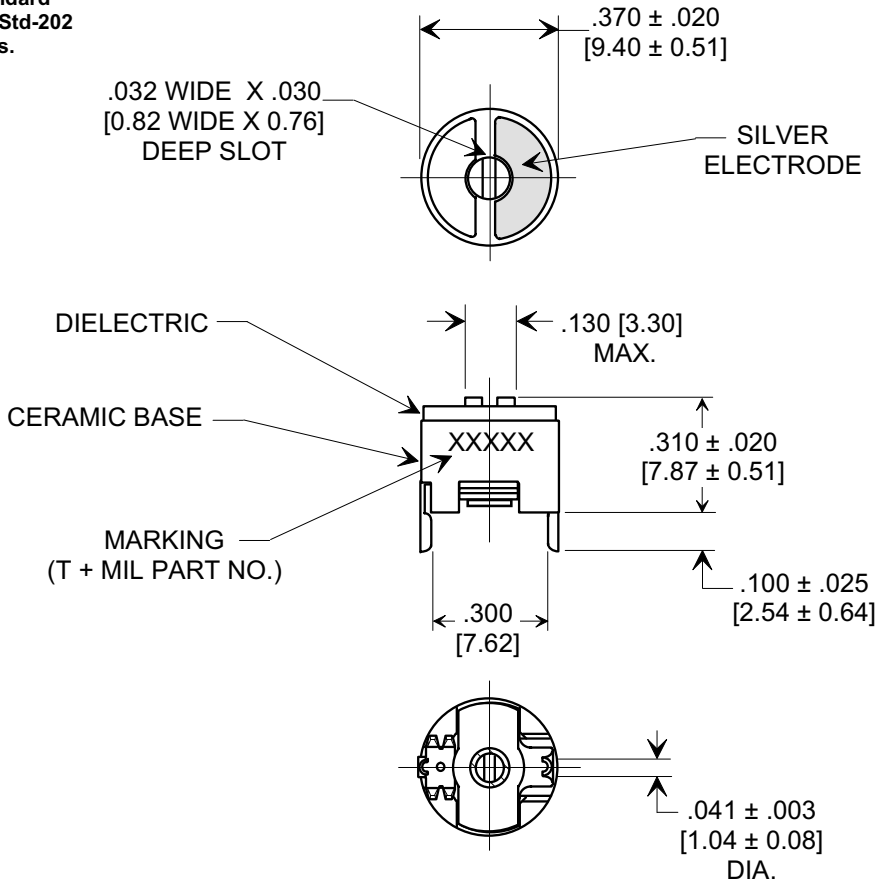

**SPECIFICATIONS**

TUSONIX STYLE	538-054
Capacitance Range:	2.5 - 11 pF
Capacitance Tolerance:	MIN: +0% , MAX: -0, +50%
Temperature Characteristic:	DIELECTRIC CODE B
Working Voltage:	350 VDC AT + 85°C
Operating Temperature Range:	-55°C TO + 125°C
To MIL - C - 81/4E CV31B110	



X-2015 Rev-0

REVISION RECORD

**A**  
Original Release  
C.O. ECO-669

TOLERANCES unless otherwise specified

2 PLC. DECIMAL ±   
3 PLC. DECIMAL ± .010 [0.25]

ANGLES ±   
TUSONIX  
TUCSON, ARIZONA

Title <b>CERAMIC TRIMMER</b>	
Drawn L.E. 04-16-09	Scale 2 X
Approved R.L. 04-16-09	
<b>A</b>	<b>538-054 B 2.5 - 11</b>