

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CTS Electronic Components](#)

[CV31D350](#)



For any questions, you can email us directly:

sales@integrated-circuit.com

MARKETING SALES DRAWING


DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

ALL METAL PARTS SILVER PLATED




This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.

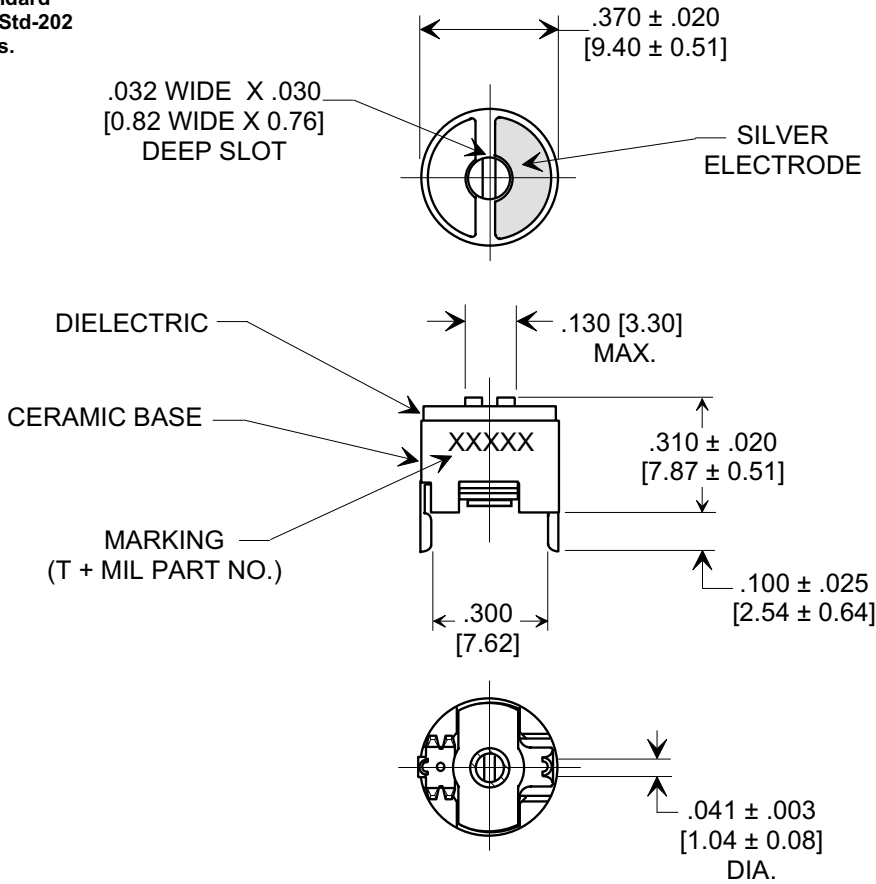

SPECIFICATIONS

TUSONIX STYLE	538-054
Capacitance Range:	9.0 - 35 pF
Capacitance Tolerance:	MIN: +0% , MAX: -0, +50%
Temperature Characteristic:	DIELECTRIC CODE A
Working Voltage:	200 VDC AT + 85°D
Operating Temperature Range:	-55°C TO + 125°C
To MIL - C - 81/4E CV31D350	



X-2015 Rev-0

REVISION RECORD

A
Original Release
C.O. ECO-669

TOLERANCES unless otherwise specified
 2 PLC. DECIMAL ± $\frac{\quad}{\quad}$
 3 PLC. DECIMAL ± .010 [0.25]

ANGLES ± $\frac{\quad}{\quad}$

TUSONIX
TUCSON, ARIZONA

Title CERAMIC TRIMMER	
Drawn L.E. 04-16-09	Scale 2 X
Approved R.L. 04-16-09	
A	538-054 D 9.0 - 35