

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[E-Switch](#)
[TL52AF260Q](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SERIES TL52 SWITCHES

THRU HOLE TACTILE SWITCH

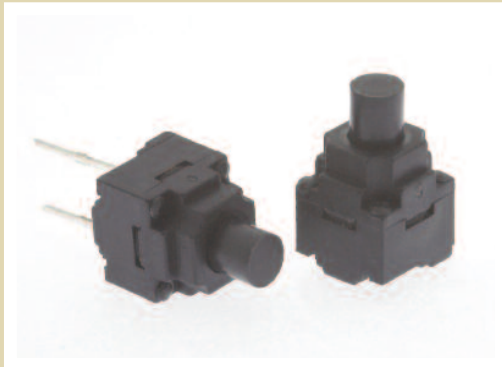

FEATURES & BENEFITS

- Sealed to IP-67 rating
- Radial packaging
- Silver contacts

APPLICATIONS / MARKETS

- Appliance
- Testing/instrumentation
- Medical

MECHANICAL SPECIFICATIONS

Mechanical Life:	100,000 cycles
Force:	260 ± 50 gf, 160 ± 50 gf
Travel:	0.3 +0.2/-0.1mm

ELECTRICAL SPECIFICATIONS

Contact Rating:	50mA @12 VDC
Contact Resistance (Initial Max.):	100 mOhms
Insulation Resistance:	100 MOhms min @100VDC
Dielectric Strength (1 Min.):	250VAC
Bounce:	10m Second Max

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-25°C to +85°C
------------------------	----------------

HOW TO ORDER

SERIES	MODEL	ACTUATOR	FORCE	PLATING
TL	52			
		A = 13.0	F160 = 160 gf F260 = 260 gf	Q = Silver

Example Ordering Number

TL52AF160Q

Specifications subject to change without notice.

