

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:




[E-Switch](#)
[R1966ABLKBLKIF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

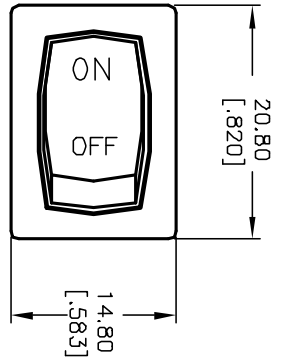


PDS: 1

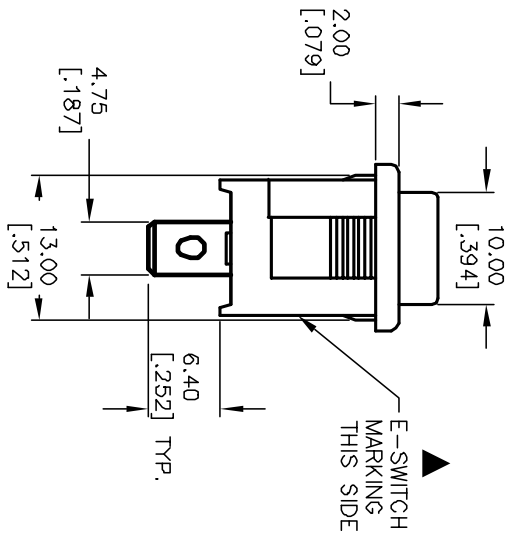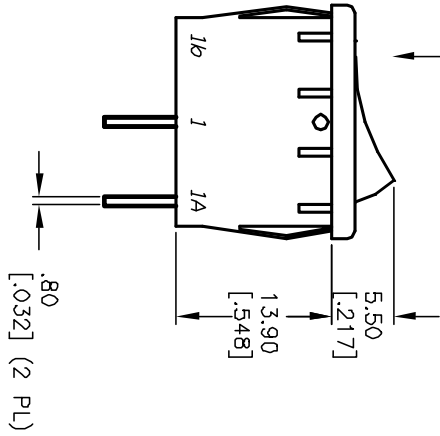

PANEL THICKNESS	X dimension
0.75-1.25 [0.30-0.49]	19.2- <i>0.1</i> [7.56]
1.25-2.0 [0.49-0.79]	19.4- <i>0.1</i> [7.64]
2.0-3.0 [0.79-1.18]	19.8- <i>0.1</i> [7.80]

SWITCH FUNCTION	
POS. 1	POS. 2
ON	OFF
1-1a	OPEN



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4

3. TERMINAL NUMBERS FOR REF ONLY X:XX=±0.25
4. RATING: 15A @ 125VAC OR 6A @ 250VAC

5. MATERIALS: TERMINALS: Silver Plated Copper Alloy
CONTACTS: Coin Silver, Silver Plated
6. ELECTRIC LIFE: 10,000 cycles
7. CONTACT RESISTANCE: <20 Mega Ω
8. INSULATION RESISTANCE: >1000 Mega Ω
9. DIELECTRIC STRENGTH: >1500 V 1 minute
>3000 V between poles



				E-SWITCH®			
TITLE				R1966A BLK BLK IF			
SCALE		DATE		DR		DWG	
1.5:1		3/27/96		MM		M301102	
REV		DATE		CHKD		CJB	
REV.		ECN No.		DESCRIPTION		REV.	
B		11664		REVISED PART DESCRIPTION		9/18/01	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							