

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Bel Fuse Inc.](#)
[S560-6600-N7-F](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

SCHEMATIC

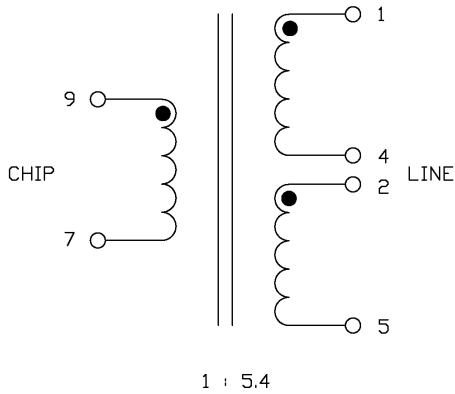

ELECTRICAL CHARACTERISTICS (@25°C)



NOMINAL TURNS RATIO:	1 : 5.4
(9-7) : (1-5)	
CONNECT TERMINALS 2 TO 4	
DC RESISTANCE:	
(1-4)	1.48Ω MAX.
(2-5)	1.48Ω MAX.
(9-7)	0.35Ω MAX.
INDUCTANCE @ 10 kHz, 0.1 Vrms:	
(1-5)	3 mH ±5%
CONNECT TERMINALS 2 TO 4	
LEAKAGE INDUCTANCE:	
(1-5)	15 μH MAX.
CONNECT TERMINALS 2 TO 4	
SHORT TERMINALS 7 & 9	
MINIMUM DIELECTRIC RATING:	
BETWEEN (1-5) & (9-7)	1500 Vrms
CONNECT TERMINALS 2 TO 4	
BETWEEN (1-4) & (2-5)	600 Vrms
THIRD HARMONIC DISTORTION:	

AT 15kHz AND FUNDAMENTAL 5kHz)

APPROXIMATE 2 Vrms @ 5kHz ACROSS LINE (1-5)

WITH RS = 135Ω AND RLOAD = 4.6Ω AT CHIP SIDE (9-7)

OPERATING TEMPERATURE RANGE: -40°C TO +85°C

DESIGNED TO COMPLY WITH THE REQUIREMENTS OF UL1950 AND EN60950

SAFETY AGENCY

UL FILE

E150991

BABT FILE

NC/011272

INSERTION LOSS	0.7 dB MAX. @ 100kHz
FREQUENCY RESPONSE	±0.3dB MAX. 40kHz-300kHz, 100kHz REFERENCE
LONGITUDINAL BALANCE:	-50 dB MAX. 20kHz TO 300kHz PER ITU METHOD (L->M)

ORIGINATED BY	DATE	TITLE	PART NO. / DRAWING NO.	STANDARD DIM.	[] METRIC DIM. AS REFERENCE	
KOT	11-29-05		S5606600N7-F	TOL. IN INCH	UNIT : INCH [mm]	REV. : B
DRAWN BY	DATE	ELECTRICAL SPECIFICATION	FILE NAME	.X	SCALE : N/A	SIZE : A4
XJ WAGN	11-29-05		S5606600N7FB.DWG	.XX		PAGE : 2
				.XXX		








DC002(2)032305

This document is electronically generated. This is a controlled copy if used internally

THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.



SUGGESTED PAD LAYOUT

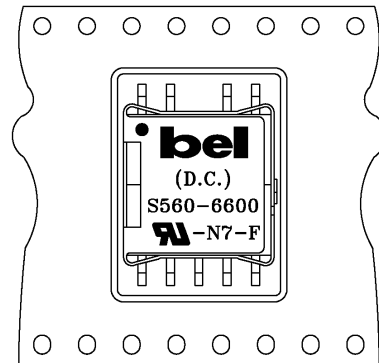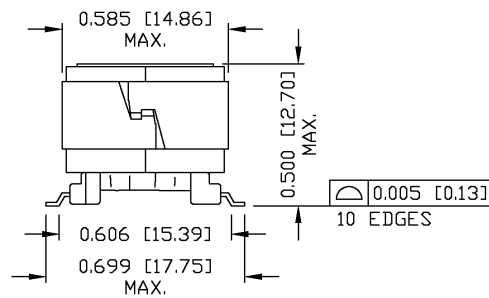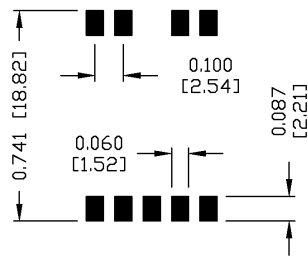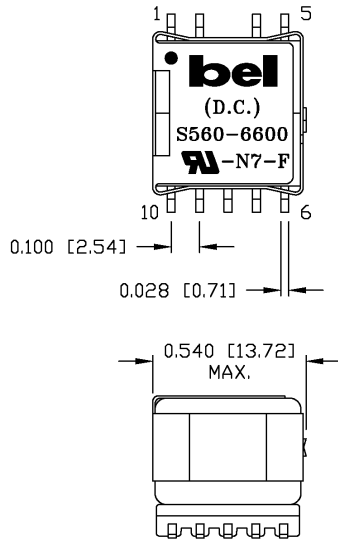

USER FEED DIRECTION

ORIENTATION OF COMPONENT INSIDE POCKET

TAPE WIDTH	32MM
POCKET PITCH	24MM
QUANTITY OF COMPONENTS PER REEL	200
PLASTIC REEL OUTER DIAMETER	13 INCHES
PLASTIC REEL HUB DIAMETER	4 INCHES
COMPLY WITH EIA 481-2-A	

NOTES:

1. STANDARD MARKING REFER TO DOC. HAND-WORK-04.
2. PACKAGE CODE: "WCS003".

ORIGINATED BY	DATE	TITLE	PART NO. / DRAWING NO.	STANDARD DIM. TOL. IN INCH	[] METRIC DIM. AS REFERENCE	
MAN CHAN	11-29-05	MECHANICAL DRAWING	S5606600N7-F	.X	UNIT : INCH [mm]	REV. : B
DRAWN BY	DATE		FILE NAME	.XX ±0.01	SCALE : N/A	SIZE : A4
MAN CHAN	11-29-05		S5606600N7FB.DWG	.XXX ±0.005	⊕	PAGE : 3

