

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[IXYS Corporation](#)

[IXSN35N100U1](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

IXYS

IGBT with Diode


IXSN 35N100U1

$$V_{CES} = 1000 \text{ V}$$

$$I_{C25} = 38 \text{ A}$$


$$V_{CE(sat)} = 3.5 \text{ V}$$

High Short Circuit SOA Capability



Symbol	Test Conditions	Maximum Ratings	
V_{CES}	$T_J = 25^\circ\text{C}$ to 150°C	1000	V
V_{CGR}	$T_J = 25^\circ\text{C}$ to 150°C ; $R_{GE} = 1 \text{ M}\Omega$	1000	A
V_{GES}	Continuous	± 20	V
V_{GEM}	Transient	± 30	V
I_{C25}	$T_C = 25^\circ\text{C}$	38	A
I_{C90}	$T_C = 90^\circ\text{C}$	25	A
I_{CM}	$T_C = 25^\circ\text{C}$, 1 ms	50	A
SSOA (RBSOA)	$V_{GE} = 15 \text{ V}$, $T_{VJ} = 125^\circ\text{C}$, $R_G = 22 \Omega$ Clamped inductive load, $L = 30 \mu\text{H}$	$I_{CM} = 50$ @ $0.8 V_{CES}$	A
t_{SC} (SCSOA)	$V_{GE} = 15 \text{ V}$, $V_{CE} = 0.6 \cdot V_{CES}$, $T_J = 125^\circ\text{C}$ $R_G = 22 \Omega$, non repetitive	10	μs
P_C	$T_C = 25^\circ\text{C}$	205	W
V_{ISOL}	50/60 Hz $I_{ISOL} \leq 1 \text{ mA}$	$t = 1 \text{ min}$ $t = 1 \text{ s}$	2500 V~ 3000 V~
T_J		-40 ... +150	$^\circ\text{C}$
T_{JM}		150	$^\circ\text{C}$
T_{stg}		-40 ... +150	$^\circ\text{C}$
M_d	Mounting torque Terminal connection torque (M4)	1.5/13 1.5/13	Nm/lb.in. Nm/lb.in.
Weight		30	g

miniBLOC, SOT-227 B



1 = Emitter, 3 = Collector
 2 = Gate, 4 = Kelvin Emitter

Features

- International standard package miniBLOC (ISOTOP) compatible
- Isolation voltage 3000 V~
- 2nd generation HDMOS™ process
 - for high short circuit SOA
- Low $V_{CE(sat)}$
 - for minimum on-state conduction losses
- MOS Gate turn-on
 - drive simplicity
- Fast Recovery Epitaxial Diode (FRED)
 - short t_{tr} and I_{RM}
- Low collector-to-case capacitance (< 50 pF)
 - reduces RFI
- Low package inductance (< 10 nH)
 - easy to drive and to protect

Applications

- AC motor speed control
- DC servo and robot drives
- DC choppers
- Uninterruptible power supplies (UPS)
- Switch-mode and resonant-mode power supplies

Advantages

- Space savings
- Easy to mount with 2 screws
- High power density


Symbol	Test Conditions	Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
BV_{CES}	$I_C = 6 \text{ mA}$, $V_{GE} = 0 \text{ V}$	1000		V
$V_{GE(th)}$	$I_C = 10 \text{ mA}$, $V_{CE} = V_{GE}$	5		8 V
I_{CES}	$V_{CE} = 0.8 \cdot V_{CES}$, $T_J = 25^\circ\text{C}$ $V_{GE} = 0 \text{ V}$, $T_J = 125^\circ\text{C}$			750 μA 15 mA
I_{GES}	$V_{CE} = 0 \text{ V}$, $V_{GE} = \pm 20 \text{ V}$			$\pm 500 \text{ nA}$
$V_{CE(sat)}$	$I_C = I_{C90}$, $V_{GE} = 15 \text{ V}$			3.5 V



IXSN 35N100U1

Symbol	Test Conditions	Characteristic Values (T _J = 25°C, unless otherwise specified)		
		min.	typ.	max.
g_{fs}	I _C = I _{C90°} ; V _{CE} = 20 V, Pulse test, t ≤ 300 μs, duty cycle d ≤ 2 %	10	20	S
I_{C(on)}	V _{GE} = 15 V		300	A
C_{ies}	V _{CE} = 25 V, V _{GE} = 0 V, f = 1 MHz		4.5	nF
C_{oes}			0.5	nF
C_{res}			0.09	nF
Q_g	I _C = I _{C90°} , V _{GE} = 15 V, V _{CE} = 0.5 V _{CES}		180	nC
Q_{ge}			45	nC
Q_{gc}			120	nC
t_{d(on)}	Inductive load, T_J = 125°C I _C = I _{C90°} , V _{GE} = 15 V, V _{CE} = 0.6 • V _{CES} , R _{on} = 6.8 Ω, R _{off} = 22 Ω Remarks: Switching times may increase for V _{CE} (Clamp) > 0.6 • V _{CES} , higher T _J or increased R _G		80	ns
t_{ri}			150	ns
t_{d(off)}			800	ns
t_{fi}			2000	ns
E_{on}			3.2	mJ
E_{off}			6.8	mJ
R_{thJC}			0.61	K/W
R_{thCK}		0.05		K/W

miniBLOC, SOT-227 B

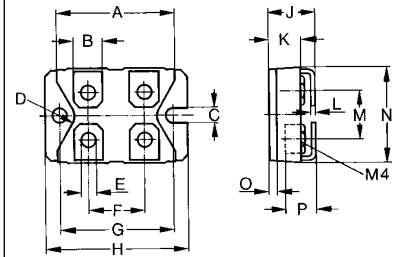

M4 screws (4x) supplied

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	31.5	31.7	1.241	1.249
B	7.8	8.2	0.307	0.323
C	4.0	-	0.158	-
D	4.1	4.3	0.162	0.169
E	4.1	4.3	0.162	0.169
F	14.9	15.1	0.587	0.595
G	30.1	30.3	1.186	1.193
H	38.0	38.2	1.497	1.505
J	11.8	12.2	0.465	0.481
K	8.9	9.1	0.351	0.359
L	0.75	0.85	0.030	0.033
M	12.6	12.8	0.496	0.504
N	25.2	25.4	0.993	1.001
O	1.95	2.05	0.077	0.081
P	-	5.0	-	0.197

Reverse Diode (FRED)

Symbol	Test Conditions	Characteristic Values (T _J = 25°C, unless otherwise specified)		
		min.	typ.	max.
V_F	I _F = I _{C90°} , V _{GE} = 0 V, Pulse test, t ≤ 300 μs, duty cycle d ≤ 2 %			2.3 V
I_{RM} t_{rr}	I _F = I _{C90°} , V _{GE} = 0 V, -di _F /dt = 480 A/μs T _J = 125°C, V _R = 360 V		150	33 A ns
R_{thJC}				0.7 K/W

IXYS MOSFETs and IGBTs are covered by one of the following U.S.patents: 4,835,592 4,881,108 5,017,508 5,049,961 5,187,117 5,486,715
4,850,072 4,931,844 5,034,796 5,063,307 5,237,481 5,381,025

IXYS reserves the right to change limits, test conditions, and dimensions.

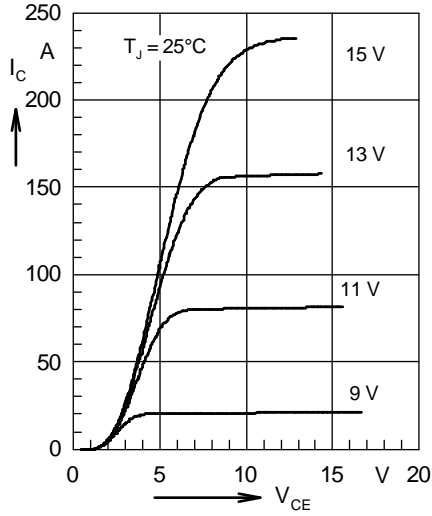


Fig. 1 Typ. output characteristics

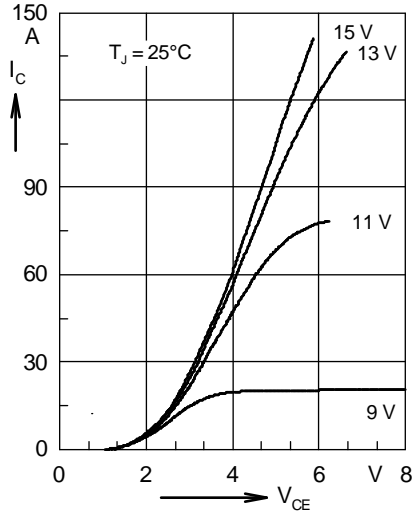


Fig. 2 Typ. output characteristics

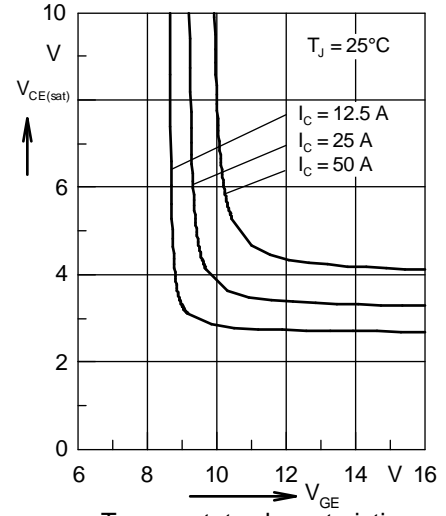


Fig. 3 Typ. on-state characteristics

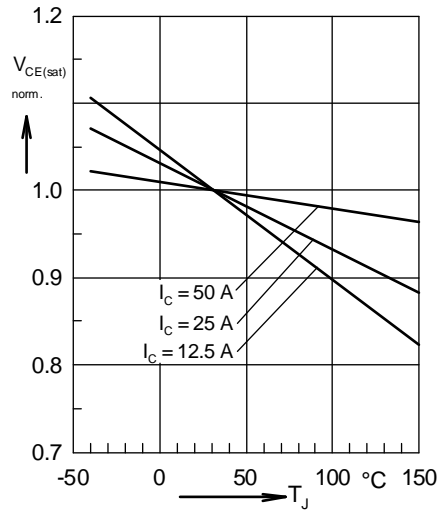


Fig. 4 Typ. temp. dependence of $V_{CE(sat)}$

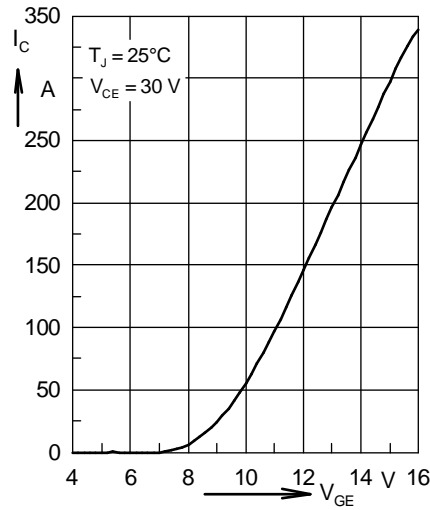


Fig. 5 Typ. transfer characteristics

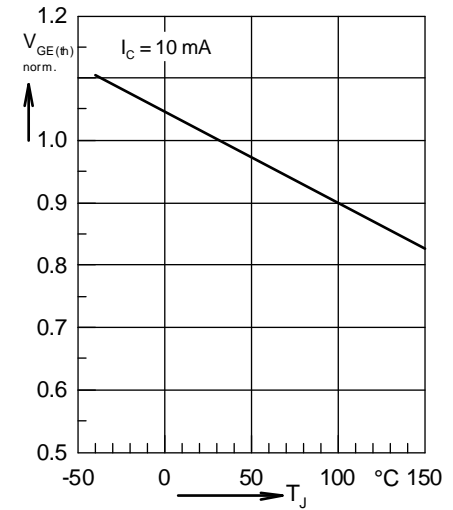


Fig. 6 Typ. temp. dependence of norm. $V_{GE(th)}$

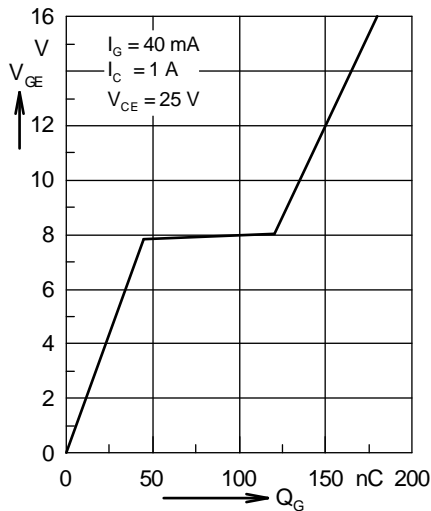


Fig. 7 Typ. turn-on gate charge characteristics, $V_{GE} = f(Q_G)$

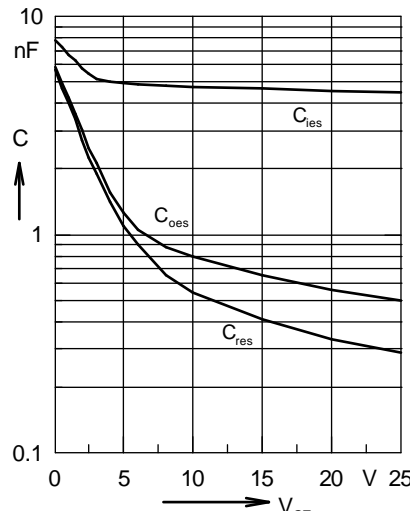


Fig. 8 Typ. capacitances

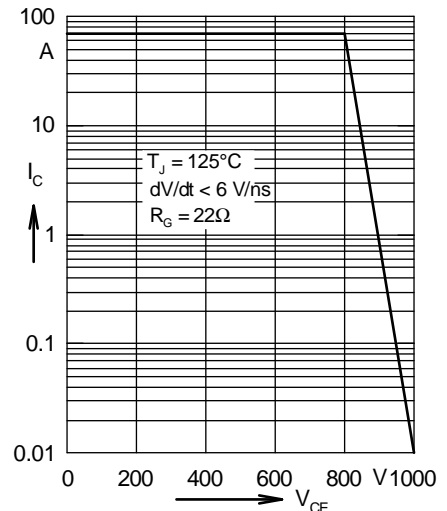


Fig. 9 Reverse biased safe operating area

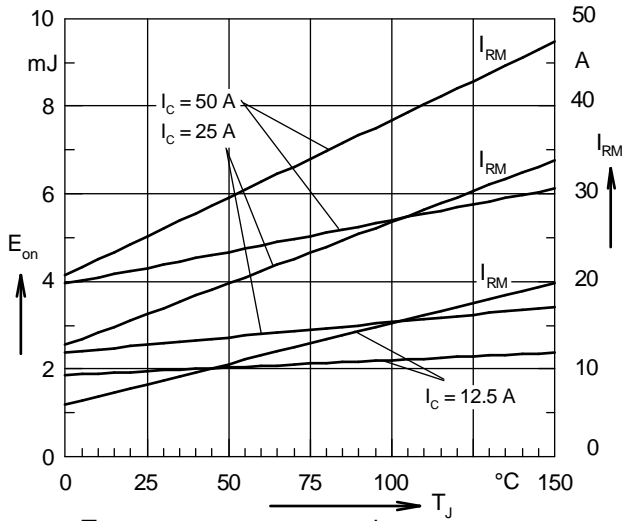


Fig. 10 Typ. turn-on energy per pulse

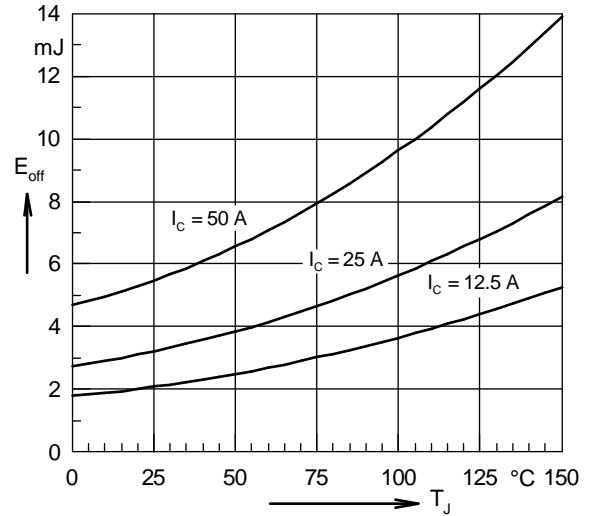


Fig. 11 Typ. turn-off energy per pulse

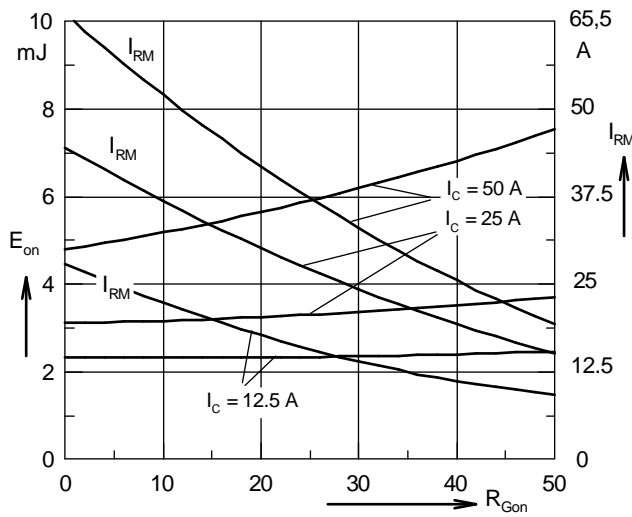


Fig. 12 Typ. turn-on energy per pulse

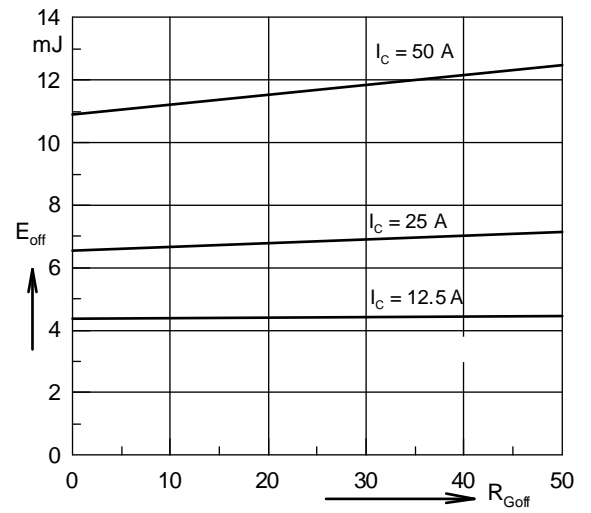


Fig. 13 Typ. turn-off energy per pulse

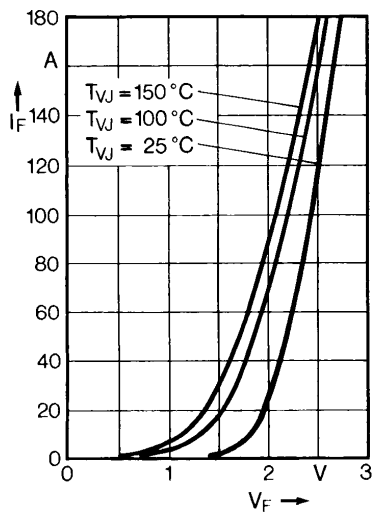


Fig. 14 Forward characteristic of reverse diode

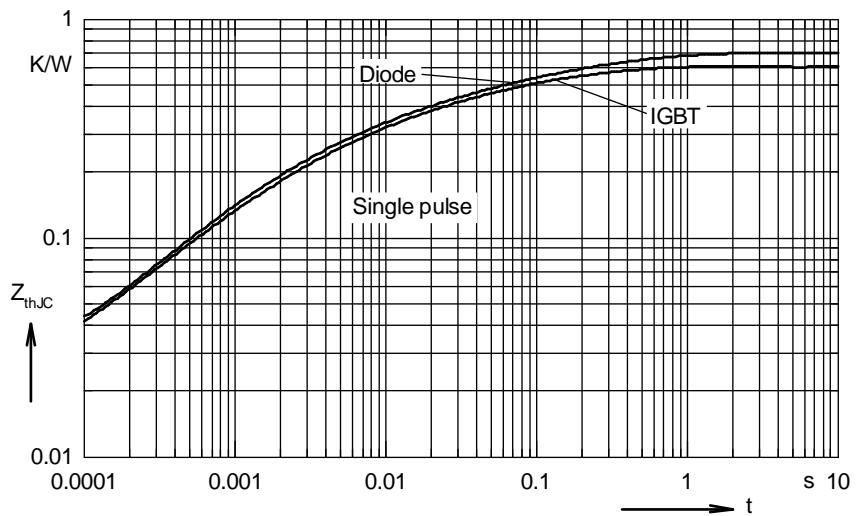


Fig. 15 Transient thermal resistance junction to case of IGBT and Diode

IXYS reserves the right to change limits, test conditions, and dimensions.



Distributor of IXYS Corporation: Excellent Integrated System Limited

Datasheet of IXSN35N100U1 - IGBT 64A 1000V SOT-227B

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com



Distributor of IXYS Corporation: Excellent Integrated System Limited

Datasheet of IXSN35N100U1 - IGBT 64A 1000V SOT-227B

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS Corporation
3540 Bassett Street, Santa Clara CA 95054
Phone: 408-982-0700, Fax: 408-496-0670

IXYS Semiconductor GmbH
Edisonstr. 15, D-68623 Lampertheim
Phone: +49-6206-503-0, Fax: +49-6206-503627