

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Vishay Semiconductor/Diodes Division](#)  
[BZW04P10-E3/73](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)




www.vishay.com

## BZW04P-5V8 thru BZW04-376

Vishay General Semiconductor

### TransZorb® Transient Voltage Suppressors



DO-204AL (DO-41)

PRIMARY CHARACTERISTICS	
V <sub>WM</sub>	5.8 V to 376 V
P <sub>PPM</sub>	400 W
P <sub>D</sub>	1.5 W
I <sub>FSM</sub> (uni-directional only)	40 A
T <sub>J</sub> max.	175 °C

#### DEVICES FOR BI-DIRECTION APPLICATIONS

For bi-directional types, use B suffix (e.g. BZW04P-6V4B).

Electrical characteristics apply in both directions.

#### FEATURES

- Glass passivated chip junction
- Available in uni-directional and bi-directional
- 400 W peak pulse power capability with a 10/1000  $\mu$ s waveform, repetitive rate (duty cycle): 0.01 %
- Excellent clamping capability
- Very fast response time
- Low incremental surge resistance
- Solder dip 275 °C max. 10 s, per JESD 22-B106
- AEC-Q101 qualified
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC



RoHS COMPLIANT

#### TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial and telecommunication.

#### MECHANICAL DATA

**Case:** DO-204AL, molded epoxy over passivated chip  
Molding compound meets UL 94 V-0 flammability rating  
Base P/N-E3 - RoHS compliant, commercial grade  
Base P/NHE3 - RoHS compliant, AEC-Q101 qualified

**Terminals:** Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 suffix meets JESD 201 class 1A whisker test, HE3 suffix meets JESD 201 class 2 whisker test

#### Note

BZW04-213(B) ~ BZW04-376(B) for commercial grade only

**Polarity:** For uni-directional types the color band denotes cathode end, no marking on bi-directional types

MAXIMUM RATINGS AND THERMAL CHARACTERISTICS (T <sub>A</sub> = 25 °C unless otherwise noted)			
PARAMETER	SYMBOL	LIMIT	UNIT
Peak pulse power dissipation with a 10/1000 $\mu$ s waveform <sup>(1)</sup> (fig. 1)	P <sub>PPM</sub>	400	W
Peak pulse current with a 10/1000 $\mu$ s waveform <sup>(1)</sup>	I <sub>PPM</sub>	See next table	A
Power dissipation on infinite heatsink at T <sub>L</sub> = 75 °C (fig. 5)	P <sub>D</sub>	1.5	W
Peak forward surge current, 8.3 ms single half sine-wave uni-directional only <sup>(2)</sup>	I <sub>FSM</sub>	40	A
Maximum instantaneous forward voltage at 25 A for uni-directional only <sup>(3)</sup>	V <sub>F</sub>	3.5/5.0	V
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	- 55 to + 175	°C

#### Notes

<sup>(1)</sup> Non-repetitive current pulse, per fig. 3 and derated above T<sub>A</sub> = 25 °C per fig. 2

<sup>(2)</sup> Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum

<sup>(3)</sup> V<sub>F</sub> = 3.5 V for BZW04P(-)188 and below; V<sub>F</sub> = 5.0 V for BZW04P(-)213 and above



www.vishay.com

## BZW04P-5V8 thru BZW04-376

Vishay General Semiconductor

ELECTRICAL CHARACTERISTICS (T <sub>A</sub> = 25 °C unless otherwise noted)									
PART NUMBER		BREAKDOWN VOLTAGE V <sub>BR</sub> AT I <sub>T</sub> (1)		TEST CURRENT I <sub>T</sub> (mA)	STAND-OFF VOLTAGE V <sub>WM</sub> (V)	MAXIMUM REVERSE LEAKAGE AT V <sub>WM</sub> I <sub>D</sub> (4) (A)	MAXIMUM PEAK PULSE CURRENT I <sub>PPM</sub> (2) (A)	MAXIMUM CLAMPING VOLTAGE AT I <sub>PPM</sub> V <sub>C</sub> (V)	MAXIMUM TEMPERATURE COEFFICIENT OF V <sub>BR</sub> (%/°C)
		MIN.	MAX.						
BZW04P5V8	BZW04P5V8B	6.45	7.48	10.0	5.80	1000	38.0	10.5	0.057
BZW04-5V8	BZW04-5V8B	6.45	7.14	10.0	5.80	1000	38.0	10.5	0.057
BZW04P6V4	BZW04P6V4B	7.13	8.25	10.0	6.40	500	35.4	11.3	0.061
BZW04-6V4	BZW04-6V4B	7.13	7.88	10.0	6.40	500	35.4	11.3	0.061
BZW04P7V0	BZW04P7V0B	7.79	9.02	10.0	7.02	200	33.0	12.1	0.065
BZW04-7V0	BZW04-7V0B	7.79	8.61	10.0	7.02	200	33.0	12.1	0.065
BZW04P7V8	BZW04P7V8B	8.65	10.0	1.0	7.78	50	30.0	13.4	0.068
BZW04-7V8	BZW04-7V8B	8.65	9.55	1.0	7.78	50	30.0	13.4	0.073
BZW04P8V5	BZW04P8V5B	9.50	11.0	1.0	8.55	10	27.6	14.5	0.07
BZW04-8V5	BZW04-8V5B	9.50	10.5	1.0	8.55	10	27.6	14.5	0.075
BZW04P9V4	BZW04P9V4B	10.5	12.1	1.0	9.4	5.0	25.7	15.6	0.075
BZW04-9V4	BZW04-9V4B	10.5	11.6	1.0	9.4	5.0	25.7	15.6	0.075
BZW04P10	BZW04P10B	11.4	13.2	1.0	10.2	1.0	24.0	16.7	0.078
BZW04-10	BZW04-10B	11.4	12.6	1.0	10.2	1.0	24.0	16.7	0.078
BZW04P11	BZW04P11B	12.4	14.3	1.0	11.1	1.0	22.0	18.2	0.081
BZW04-11	BZW04-11B	12.4	13.7	1.0	11.1	1.0	22.0	18.2	0.081
BZW04P13	BZW04P13B	14.3	16.5	1.0	12.8	1.0	19.0	21.2	0.084
BZW04-13	BZW04-13B	14.3	15.8	1.0	12.8	1.0	19.0	21.2	0.084
BZW04P14	BZW04P14B	15.2	17.6	1.0	13.6	1.0	17.8	22.5	0.086
BZW04-14	BZW04-14B	15.2	16.8	1.0	13.6	1.0	17.8	22.5	0.086
BZW04P15	BZW04P15B	17.1	19.8	1.0	15.3	1.0	16.0	25.2	0.088
BZW04-15	BZW04-15B	17.1	18.9	1.0	15.3	1.0	16.0	25.2	0.088
BZW04P17	BZW04P17B	19.0	22.0	1.0	17.1	1.0	14.5	27.7	0.090
BZW04-17	BZW04-17B	19.0	21.0	1.0	17.1	1.0	14.5	27.7	0.090
BZW04P19	BZW04P19B	20.9	24.2	1.0	18.8	1.0	13.0	30.6	0.092
BZW04-19	BZW04-19B	20.9	23.1	1.0	18.8	1.0	13.0	30.6	0.092
BZW04P20	BZW04P20B	22.8	26.4	1.0	20.5	1.0	12.0	33.2	0.094
BZW04-20	BZW04-20B	22.8	25.2	1.0	20.5	1.0	12.0	33.2	0.094
BZW04P23	BZW04P23B	25.7	29.7	1.0	23.1	1.0	10.7	37.5	0.096
BZW04-23	BZW04-23B	25.7	28.4	1.0	23.1	1.0	10.7	37.5	0.096
BZW04P26	BZW04P26B	28.5	33.0	1.0	25.6	1.0	9.6	41.5	0.097
BZW04-26	BZW04-26B	28.5	31.5	1.0	25.6	1.0	9.6	41.5	0.097
BZW04P28	BZW04P28B	31.4	36.3	1.0	28.2	1.0	8.8	45.7	0.098
BZW04-28	BZW04-28B	31.4	34.7	1.0	28.2	1.0	8.8	45.7	0.098
BZW04P31	BZW04P31B	34.2	39.6	1.0	30.8	1.0	8.0	49.9	0.099
BZW04-31	BZW04-31B	34.2	37.8	1.0	30.8	1.0	8.0	49.9	0.099
BZW04P33	BZW04P33B	37.1	42.9	1.0	33.3	1.0	7.4	53.9	0.100
BZW04-33	BZW04-33B	37.1	41.0	1.0	33.3	1.0	7.4	53.9	0.100
BZW04P37	BZW04P37B	40.9	47.3	1.0	36.8	1.0	6.7	59.3	0.101
BZW04-37	BZW04-37B	40.9	45.2	1.0	36.8	1.0	6.7	59.3	0.101
BZW04P40	BZW04P40B	44.7	51.7	1.0	40.2	1.0	6.2	64.8	0.101
BZW04-40	BZW04-40B	44.7	49.4	1.0	40.2	1.0	6.2	64.8	0.101
BZW04P44	BZW04P44B	48.5	56.1	1.0	43.6	1.0	5.7	70.1	0.102
BZW04-44	BZW04-44B	48.5	53.6	1.0	43.6	1.0	5.7	70.1	0.102
BZW04P48	BZW04P48B	53.2	61.6	1.0	47.8	1.0	5.2	77.0	0.103
BZW04-48	BZW04-48B	53.2	58.8	1.0	47.8	1.0	5.2	77.0	0.103
BZW04P53	BZW04P53B	58.9	68.2	1.0	53.0	1.0	4.7	85.0	0.104
BZW04-53	BZW04-53B	58.9	65.1	1.0	53.0	1.0	4.7	85.0	0.104
BZW04P58	BZW04P58B	64.6	74.8	1.0	58.1	1.0	4.3	92.0	0.104
BZW04-58	BZW04-58B	64.6	71.4	1.0	58.1	1.0	4.3	92.0	0.104
BZW04P64	BZW04P64B	71.3	82.5	1.0	64.1	1.0	3.9	103	0.105
BZW04-64	BZW04P64B	71.3	78.8	1.0	64.1	1.0	3.9	103	0.105



www.vishay.com

## BZW04P-5V8 thru BZW04-376

Vishay General Semiconductor

ELECTRICAL CHARACTERISTICS (T <sub>A</sub> = 25 °C unless otherwise noted)									
PART NUMBER		BREAKDOWN VOLTAGE V <sub>BR</sub> AT I <sub>T</sub> <sup>(1)</sup> (V)		TEST CURRENT I <sub>T</sub> (mA)	STAND-OFF VOLTAGE V <sub>WM</sub> (V)	MAXIMUM REVERSE LEAKAGE AT V <sub>WM</sub> I <sub>D</sub> <sup>(4)</sup> (A)	MAXIMUM PEAK PULSE CURRENT I <sub>PPM</sub> <sup>(2)</sup> (A)	MAXIMUM CLAMPING VOLTAGE AT I <sub>PPM</sub> V <sub>C</sub> (V)	MAXIMUM TEMPERATURE COEFFICIENT OF V <sub>BR</sub> (%/°C)
		UNI-DIRECTIONAL	BI-DIRECTIONAL						
BZW04P70	BZW04P70B	77.9	90.2	1.0	70.1	1.0	3.5	113	0.105
BZW04-70	BZW04-70B	77.9	86.1	1.0	70.1	1.0	3.5	113	0.105
BZW04P78	BZW04P78B	86.5	100	1.0	78.0	1.0	3.2	125	0.105
BZW04-78	BZW04-78B	86.5	95.5	1.0	78.0	1.0	3.2	125	0.105
BZW04P85	BZW04P85B	95.0	110	1.0	85.5	1.0	2.9	137	0.106
BZW04-85	BZW04-85B	95.0	105	1.0	85.5	1.0	2.9	137	0.106
BZW04P94	BZW04P94B	105	121	1.0	94.0	1.0	2.6	152	0.107
BZW04-94	BZW04-94B	105	116	1.0	94.0	1.0	2.6	152	0.107
BZW04P102	BZW04P102B	114	132	1.0	102	1.0	2.4	165	0.107
BZW04-102	BZW04-102B	114	126	1.0	102	1.0	2.4	165	0.107
BZW04P110	BZW04P110B	124	143	1.0	111	1.0	2.2	179	0.107
BZW04-110	BZW04-110B	124	137	1.0	111	1.0	2.2	179	0.107
BZW04P128	BZW04P128B	143	165	1.0	128	1.0	2.0	207	0.108
BZW04-128	BZW04-128B	143	158	1.0	128	1.0	2.0	207	0.108
BZW04P136	BZW04P136B	152	176	1.0	136	1.0	1.8	219	0.108
BZW404-136	BZW404-136B	152	168	1.0	136	1.0	1.8	219	0.108
BZW04P145	BZW04P145B	161	187	1.0	145	1.0	1.7	234	0.108
BZW04-145	BZW04-145B	161	179	1.0	145	1.0	1.7	234	0.108
BZW04P154	BZW04P154B	171	198	1.0	154	1.0	1.6	246	0.108
BZW04-154	BZW04-154B	171	189	1.0	154	1.0	1.6	246	0.108
BZW04P171	BZW04P171B	190	220	1.0	171	1.0	1.5	274	0.108
BZW04-171	BZW04-171B	190	210	1.0	171	1.0	1.5	274	0.108
BZW04P188	BZW04P188B	209	242	1.0	188	1.0	1.4	301	0.108
BZW04-188	BZW04-188B	209	231	1.0	188	1.0	1.4	301	0.108
BZW04P213	BZW04P213B	237	275	1.0	213	1.0	1.2	344	0.110
BZW04-213	BZW04-213B	237	263	1.0	213	1.0	1.2	344	0.110
BZW04P239	BZW04P239B	266	308	1.0	239	1.0	1.1	384	0.110
BZW04-239	BZW04-239B	266	294	1.0	239	1.0	1.1	384	0.110
BZW04P256	BZW04P256B	285	330	1.0	256	1.0	1.0	414	0.110
BZW04-256	BZW04-256B	285	315	1.0	256	1.0	1.0	414	0.110
BZW04P273	BZW04P273B	304	352	1.0	273	1.0	0.90	438	0.110
BZW04-273	BZW04-273B	304	336	1.0	273	1.0	0.90	438	0.110
BZW04P299	BZW04P299B	332	385	1.0	299	1.0	0.80	482	0.110
BZW04-299	BZW04-299B	332	368	1.0	299	1.0	0.80	482	0.110
BZW04P342	BZW04P342B	380	440	1.0	342	1.0	0.75	548	0.110
BZW04-342	BZW04-342B	380	420	1.0	342	1.0	0.75	548	0.110
BZW04P376	BZW04P376B	418	484	1.0	376	1.0	0.67	603	0.110
BZW04-376	BZW04-376B	418	462	1.0	376	1.0	0.67	603	0.110

### Notes

- (1) Pulse test: t<sub>p</sub> ≥ 50 ms
- (2) Surge current waveform per fig. 3 and derated per fig. 2
- (3) All terms and symbols are consistent with ANSI/IEEE C62.35
- (4) For bi-directional types having V<sub>WM</sub> of 10 V and less, the I<sub>D</sub> limit is doubled

ORDERING INFORMATION (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
BZW04P10-E3/54	0.350	54	550	13" diameter paper tape and reel
BZW04P10HE3/54 (1)	0.350	54	550	13" diameter paper tape and reel

### Note

- (1) AEC Q101 qualified



www.vishay.com

# BZW04P-5V8 thru BZW04-376

Vishay General Semiconductor

## RATINGS AND CHARACTERISTICS CURVES (T<sub>A</sub> = 25 °C unless otherwise noted)

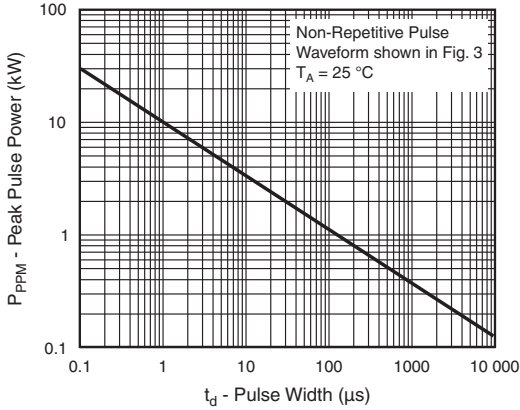


Fig. 1 - Peak Pulse Power Rating Curve

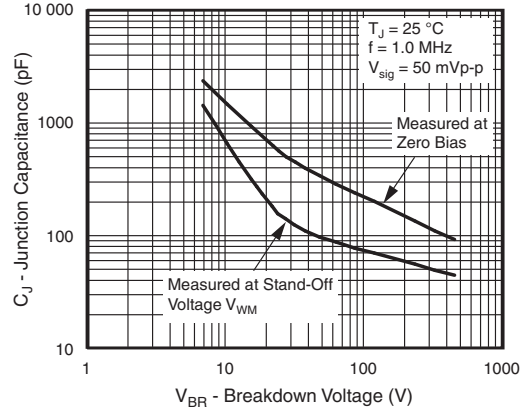


Fig. 4 - Typical Junction Capacitance

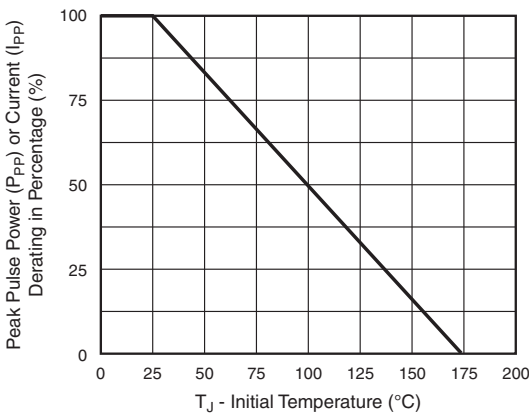


Fig. 2 - Pulse Power or Current vs. Initial Junction Temperature

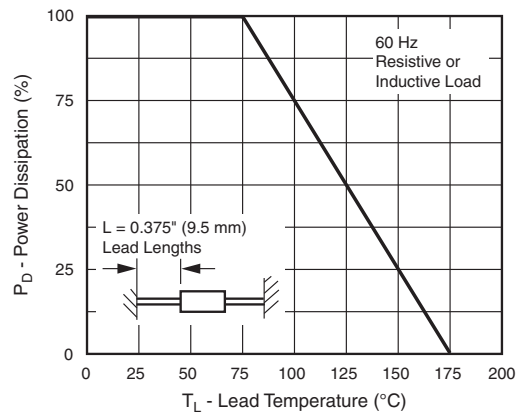


Fig. 5 - Power Derating Curve

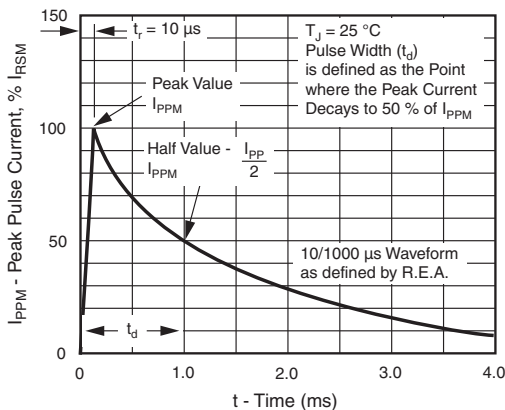


Fig. 3 - Pulse Waveform

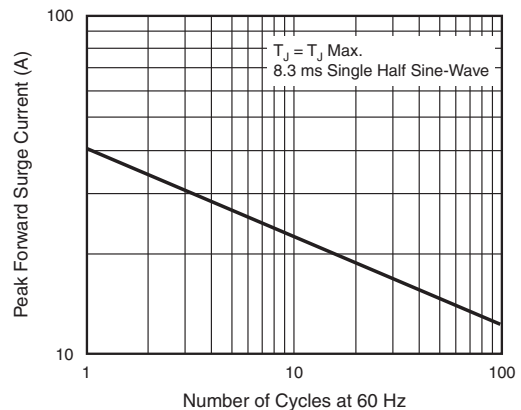


Fig. 6 - Max. Non-Repetitive Forward Surge Current  
Uni-Directional Only




www.vishay.com

## BZW04P-5V8 thru BZW04-376

Vishay General Semiconductor

### PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

DO-204AL (DO-41)

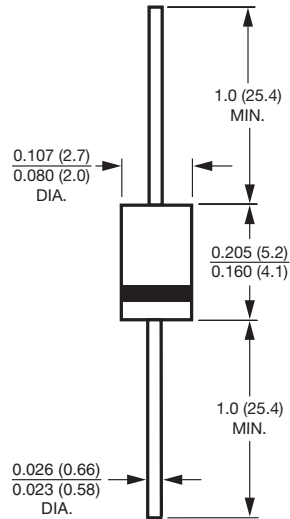



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**