

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

For any questions, you can email us directly:

sales@integrated-circuit.com

HRCI Industrial Ceramic Body Fuses

CIF21

HRCI-CA Bolt-On Mounting

Ampere Ratings: 1-30A

Voltage Rating: 600V_{ac}; 250V_{dc}

Interrupting Rating: 200,000A RMS

Symmetrical


Agency Information: CSA C22.2

No. 106-M92



- Provides both overload and short-circuit protection to HRCI requirements.
- Offset blades for bolt-on mounting.
- CIF21 fuse fits the Bussmann-Carnaster Fuseholder.

Dimensional Data

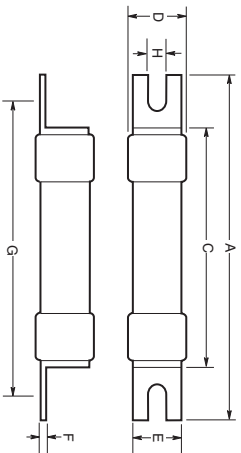


CE logo denotes compliance with European Union Low Voltage Directive (50-1000V_{ac}; 75-1500V_{dc}). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

Type	Catalog Symbol	Current Ratings	Tags				Mounting				Body	
			A	E	F	G	H	C	D			
HRCI-CA	(AMP) CIF21	1, 3, 10, 15, 20, 25, 30	2.15 (64.50)	.44 (11.10)	.03 (0.81)	1.75 (44.50)	.19 (4.70)	1.44 (36.50)	.54 (13.80)			

Data Sheet: 4127

Dimensional Data

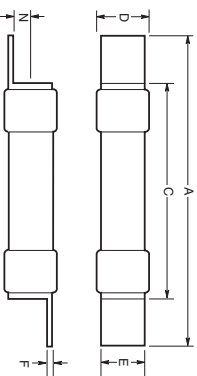

- Industrial miniature fuse with offset blades for clip-in mounting.
- Ground ceramic body with plated endcaps.
- Provides both short-circuit and overload protection.
- CIF06 fits the 30A SafeLOC fuseholder.
- EK fits the 60A SafeLOC fuseholder.

CE logo denotes compliance with European Union Low Voltage Directive (50-1000V_{ac}; 75-1500V_{dc}). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.



CIF06 & EK

HRCI-CB Clip-In Mounting

Ampere Ratings: CIF06: 1-30A, EK: 35-60A

Voltage Rating: 600V_{ac}; 250V_{dc}

Interrupting Rating: 200,000A RMS Symmetrical

Agency Information: CSA C22.2 No. 106-M92

Type	Catalog Symbol	Current Ratings	Dimensions in Inches and (mm)					
			A	E	F	N	C	D
HRCI-CB	(AMP) CIF06	1, 10, 15	2.38 (60.40)	.50 (12.70)	.03 (0.81)	.14 (3.50)	1.44 (36.50)	.54 (13.80)
		20, 25, 30	2.65 (67.30)	.58 (14.80)	.05 (1.22)	.14 (3.50)	1.44 (36.30)	.8 (21.40)
HRCI-CB	EK (AMP)	30, 35, 40	2.65 (67.30)	.58 (14.80)	.05 (1.22)	.14 (3.50)	1.44 (36.30)	.8 (21.40)
		50, 60	2.65 (67.30)	.58 (14.80)	.05 (1.22)	.14 (3.50)	1.44 (36.30)	.8 (21.40)

Data Sheet: 4128

192

For complete specification data, call Bussmann Information Fax - 636.527.1450

