



Distributor of Laird Technologies EMI: Excellent Integrated System Limited

Datasheet of BMI-S-202-F - BOARD SHIELD .65X.65" FRAME

Contact us: [sales@integrated-circuit.com](mailto:sales@integrated-circuit.com) Website: [www.integrated-circuit.com](http://www.integrated-circuit.com)

---

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Laird Technologies EMI](#)

[BMI-S-202-F](#)


For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Laird Technologies  
 Web site: [www.LairdTech.com](http://www.LairdTech.com)

All Categories > EMI Solutions > EMI Shielding & Gaskets > Board-Level Shielding > Standard Surface Mount Shields-Two-Piece > Item # BMIS-202

**Item # BMIS-202 Standard Surface Mount Shields-Two-Piece**

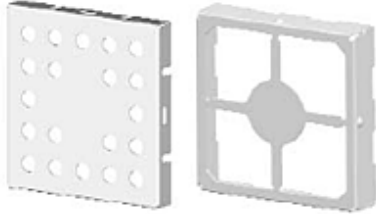

[larger image](#)

- 48 VQFP
- 44, 48 QFP

**Specifications**

Surface Area	0.402 inches <sup>2</sup>
Surface Area	259.21 mm <sup>2</sup>
Maximum Overall Dimension	0.650 x 0.650 inches
Maximum Overall Dimension	16.50 x 16.50 mm
Maximum Overall Height	0.142 inches
Maximum Overall Height	3.60 mm
Material Thickness	0.20 mm
Carrier Tape Width	32 mm
Carrier Tape Pitch	24 mm
Weight	0.5 gms
Pick-up Spot Diameter	≥ 6 mm
Carrier Tape Material	LTIMS-LCB
Cover Tape Material	LTIMS-PSA
Reel Diameter	330 mm
Reel Material	Plastic
Parts Per Reel	700
Material	0.20 mm CRS Tin
Packaging	EIA-481
Co-planarity (Test LTWI-1119 & ANSI/JSTD-002)	< 0.10 mm
Solderability (Test MIL-STD-202 Method 208)	>99 %
Surface Mount Solderability (Test ANSI/EIA 638)	Passes



<b>Appearance (Test LTIES-125)</b>	Passes
<b>Adhesion (Test ASTM B-571)</b>	Passes
<b>3 Axis Mechanical Shock (Test LTES-461)</b>	Passes

[Print](#) [Back](#)