

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[ASSMANN WSW Components](#)
[A-2004-3-4-LP-N-R](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

1 2 3 4 5 6 7

A
B
C
D
E
F

A
B
C
D
E
F

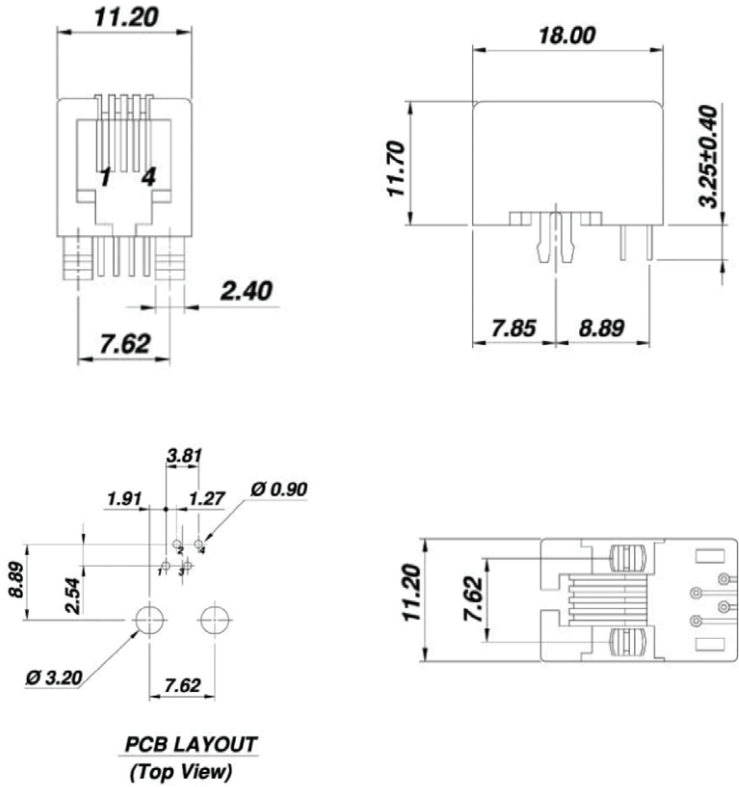

Materials:

- Insulator: P.B.T. Glass Filled, UL94V-0
 - Soldering Temperature: 235°C
- Spring Wire: 0.45MM Dia. Phosphor Bronze
 Gold Plating over Nickel
- Color: Black

Electrical:

- Insulation Resistance: 500MΩ Min.
- Contact Resistance: 20MΩ Max.
- Rating Current: 1.5A Max.
- Rating Voltage: 120V AC
- Dielectric Withstanding: 1,000V AC at 1 Minute
- Operating Temperature: -40°C ~ +85°C
- Durability: 500 Mating cycles Min.

Scale	1:1					Name	Item No.
TOLERANCE					Drawn	12.20.11	A-2004-3-4-LP-N
X.X	±0.40				Approved		Title Modular Jack, Low Profile, 4P4C, 90°, Side Entry, 6µ", Black, PBT Glass Filled
X.XX	±0.25						Drawing No.
X.XXX	±0.15						rev00
Angle	±3°						Replace
							Sheet
			Modification	Date	Name		



1 2 3 4 5 6 7

H