

Excellent Integrated System Limited





Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)
[A-2014-2-4-LP/FS-R](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

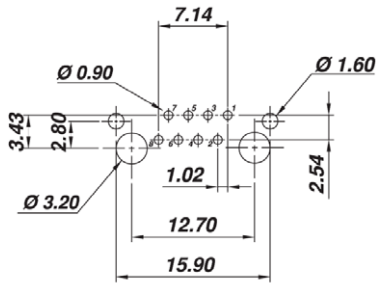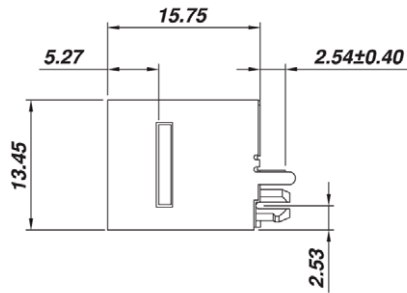

PC Layout
(Top View)

Materials:

- Housing: Nylon (UL 94V-0), Soldering Temperature 260°C
- Color: Black Color
- Spring Wire: 0.35MM Thickness Phosphor Bronze Gold Plating over Nickel
- Shielded: Brass Plating Nickel
- Temperature Range: -40°C ~ +85°C
- Durability: 500 Mating cycles Min.

Electrical:

- Insulation Resistance: 500MΩ (Min.)
- Contact Resistance: 20MΩ (Max.)
- Rating Current: 1.5A (Max.)
- Rating Voltage: 120V AC
- Dielectric Voltage: 1,000Vrms 60 Sec. Min.

MM = ±0.25 (except Pin Lengths)

Pin Lengths MM = ±0.40

⊕ = Assmann logo



ITEM NO.

A-2014-2-4-LP/FS

TITLE

Modular Jack, 8P8C, RJ45, Top Entry, 180°,
Shielded, 6μ", Round Pin

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
 Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
 ©Copyright 2010 by Assmann Electronic Components
 All International Rights Reserved