

Excellent Integrated System Limited






Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol Commercial Products](#)
[101-00565-64](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

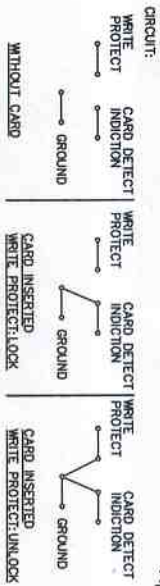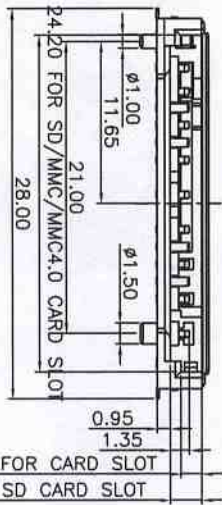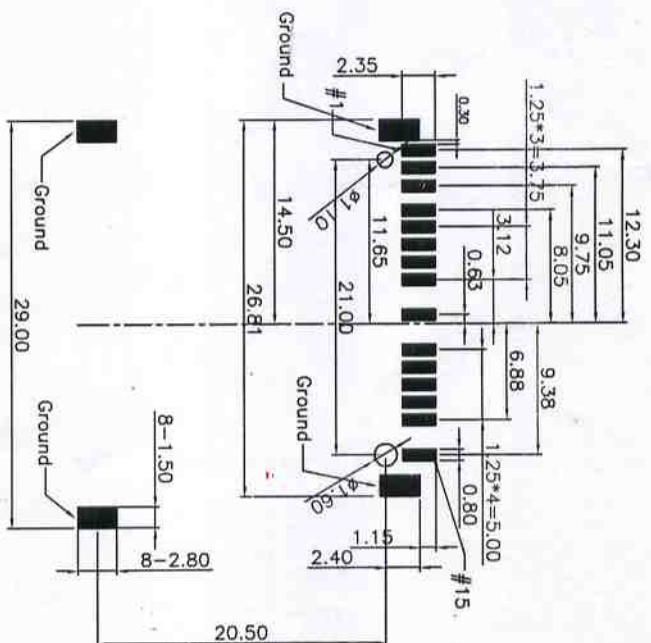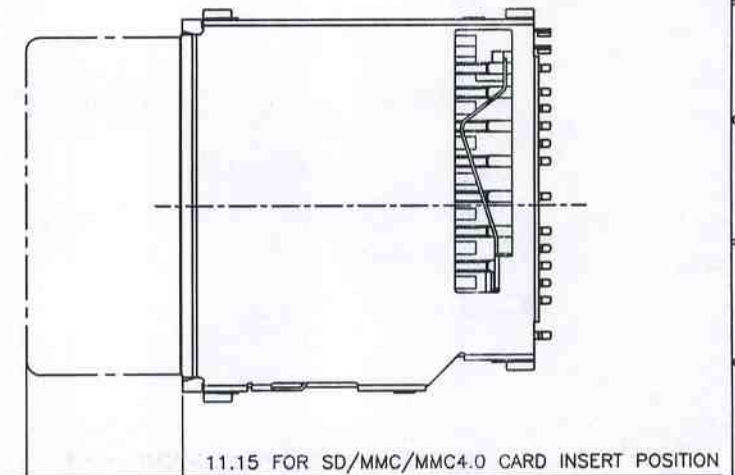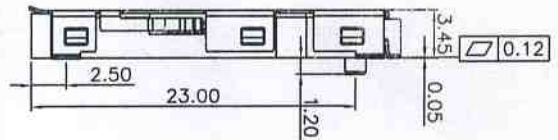

1.50 FOR CARD SLOT
2.25 FOR SD CARD SLOT

Notes:

1. All Dimensions are in Millimeters.
2. Operation voltage: 100 VAC max.
3. Current rating : 1 Amps max.
4. Contact resistance: 40m ohms max.
5. Insulation resistance: 1000M ohms min. 500 VDC
6. Dielectric withstanding voltage: 500 VAC / 1minute
7. Operating Temperature: -20°C to $+60^{\circ}\text{C}$
8. Storage Temperature: -40°C to $+70^{\circ}\text{C}$
9. Total Mating Force : 40N (MAX) at 25 mm/minute
10. Total Unmating Force: 2N (MIN) at 25 mm/minute

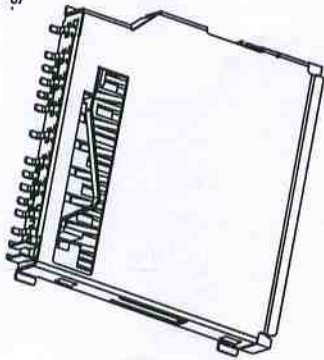

NO.	SIGNALS FUNCTION	SD/MMC4.0
#1	WP SW	SD
#2	CD SW	SD-8
#3	DATA1 (Data 1)	SD-7
#4	DATA0 (Data 0)	MMC-13
#5	DATA7 (Data 7)	SD-6
#6	GM0/VSS. 2	MMC-12
#7	DATA6 (Data 6)	SD-5
#8	CLK	SD-4
#9	VCC/VDD	SD-3
#10	VSS. 1	MMC-11
#11	DATA5 (Data 5)	SD-2
#12	GM0	MMC-10
#13	DATA4 (Data 4)	SD-1
#14	DATA3 (Data 3)	SD-9
#15	DATA2 (Data 2)	

RECOMMENDED P.C. BOARD LAYOUT (TOP VIEW)
TOLERANCES UNLESS OTHERWISE SPEC. ± 0.05
PIN ASSIGNMENT

REV.	ECN. NO.	MODIFY. CONTENT	DATE
A	ES.D0804.012	訂版發行	2008/4/

GENERAL TOLERANCE	FILE.NO.	PART.NO.	DRAWN	MATERIAL	SCALE
	10100565	10100565**	ilily,li		no scale

X $\pm$ 0.50	x: $\pm 5^{\circ}$	REV.	A 	TITLE	SD+MMC+MMCA.0 Conn.	CHECKED	Lg. Zou v/g	DATE	2008/4/1	UNIT	mm
.X $\pm$ 0.38	.x: $\pm 2^{\circ}$	SIZE		SHEET	1 OF 1	APPROVED	Trel	Amphenol Shouh Min Industry			
.XX $\pm$ 0.25	.xx: $\pm 1^{\circ}$	A4									

Amphenol Shouh Min Industry