

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Conec](#)
[41-00006](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

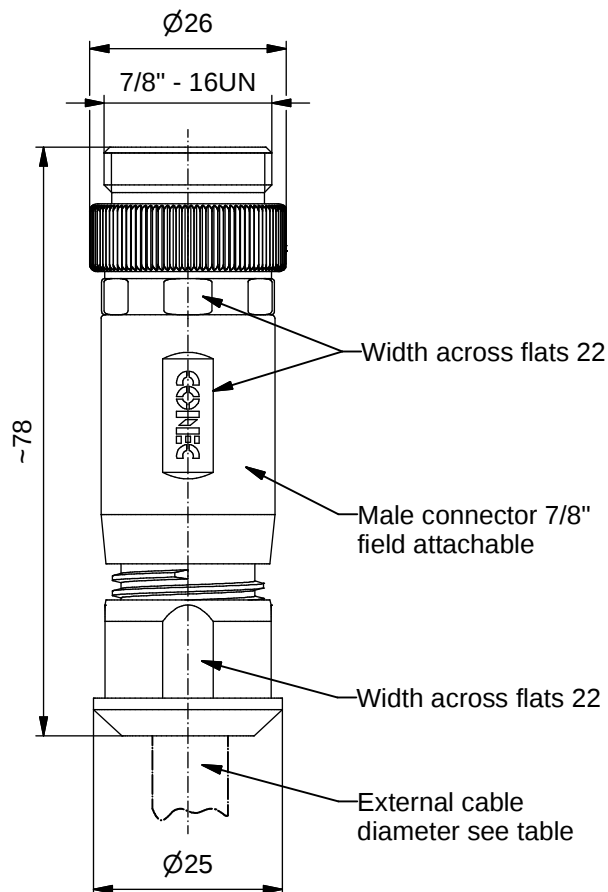

4pos + PE



Directive 2002/95/EC
"RoHS"
Compliant

Technical specification:

Rated voltage: IEC 60664-1	4pos + PE 250 V
Current rating: IEC 60512-3	9A at 40°C
Insulation resistance: IEC 60512-2	>=10 GΩ
Pollution degree: IEC 60664-1	3/2
Degree of protection: IEC 60529	IP 67, in mated condition
Temperature range: IEC 60664-1	-40°C ... +85°C
Mating cycles: IEC 60512-9a	<=100
Wire cross section:	AWG16 / max. 1,5mm ²
Contact termination:	Screw connection

Materials:

Contact:	CuZn
Contact plating:	Nickel, gold plated
Contact carrier:	TPU, UL 94
Cable sealing:	Elastomere
Coupling screw:	CuZn, nickel plated
Housing:	PA6 GF, UL 94


Part no:	Description:	Cable sealing:
41-00006	SAL - 7/8 - RSC4PE - S	For external cable diameter 6-8mm, 8-10mm, 10-12mm

DO NOT ALTER CAD
DRAWING BY HAND

Status: 05.05.08 Mkf

tolerance: ISO 2768-m

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.



dim. in mm

	date	name
drawn	11.10.07	Burschik
appd.	01.11.07	Schmidt

CONEC®

title:

Male connector 7/8", 4pos+PE
field attachable, axial, with screw connection

dwg no:

Inventor 10

41K1A330