


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00425	Connector, plug, USB A	1	
2	50-00024	Connector, dc plug, 5.5x2.1x123 mm, molding style, spring contacts	1	
3	30-00008	Wire, 2C BC, 22 AWG, UL2468, 300V, 80C, 3.6 mm, PVC, 87A	1	
4	24-00023	Overmold, PVC, black	1	
5	24-00043	Overmold, PVC, black	1	
6	Label 240	Adhesive, flag, 15x65 mm	1	

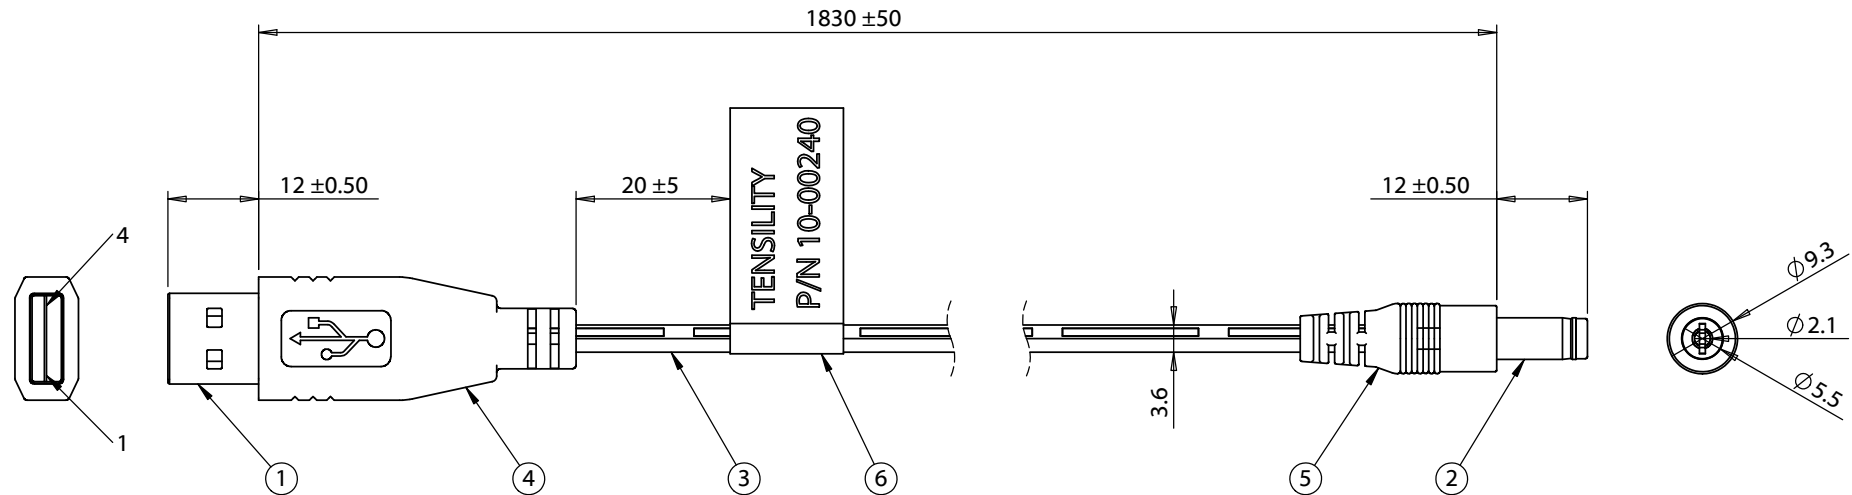

Notes:

Electrical requirement: 1 A, 5 Vdc

Hi-Pot test: 600 Vac, 0.5 mA, 1 second



Wiring diagram		
50-00425	Wire Color	50-00024
1	Black with stripe	Center
2	N.C.	-
3	N.C.	-
4	Black	Sleeve

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com			
A	11/10/2009	Initial release		RoHS and REACH compliant				
A1	3/16/2010	Added label drawing	Verified:	Function test: no open, no short circuit, no intermittent				
A2	9/06/2011	Updated specifications	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, USB A plug to 5.5x2.1x12 mm 50-00024 plug, center pos, 22 AWG, UL2468, 30-00008 wire	Size:	Part number:		
A3	8/08/2012	Added label specs, updated wire part number			A	10-00240		
					Scale: 1:1	 	Sheet 1 of 1	



Sheet 1 of 1