

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Artesyn Embedded Technologies](#)

[AIF120F300N-L](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

POWER

AIF Series 600 Watts

Data Sheet

Total Power: 600 Watts
(12 V @ 50 A)
Input Voltage: 300 V
of Outputs: Single



SPECIAL FEATURES

- 600 W continuous power at 100 °C baseplate temperature
- 108 W/in³ (6.6 W/cm³)
- High efficiency - up to 90%
- Low output ripple and noise
- Positive and Negative enable function
- Excellent transient response
- OVP, OCP, V Adj control with ALP™ analog mode linear control, or through I²C bus with digital mode control
- Paralleable with accurate current sharing
- EU Directive 2002/95/EC compliant for RoHS
- Two year warranty

SAFETY

- UL 60950 Recognized
- cUL 60950 Recognized
- TUV EN60950 Licensed
- CE CE Mark

Electrical Specifications

Input	
Input range	250 - 420 VDC
Input surge	450 V / 100 ms
Efficiency	90% @ 5.0 V (Typical)
Output	
Load Regulation	0.2% typical down to no load
Line Regulation	0.2% typical
Noise / Ripple	100 mV typical (below 5 V); 2% typical (5 V and above)
Remote sense	Up to 0.5 V
Output voltage adjust range	+/-20% for 5V and above; +10%/-50% for below 5 V
Transient Response	5% max for 3.3 V and above, 150 mV for 1.8V, deviation with 25% to 75% full load 250 μS (max) recovery
Current Share Accuracy	3% typical
Overvoltage Protection	115% Vo (nominal)
Current Limit	115% Io maximum
Control	
Voltage Adjust	80 to 120% Vo linear programming for 12 V, 15 V, 24 V, 48 V 50% to 110% for 1.8 V - 5.0 V
Enable	TTL compatible (positive & negative enable options)
Current Limit Adjust	20 to 100% Io linear programming or digital mode control
Clock Input (external sync)	3.3 to 5.5 Vp-p @ 800 KHz ±10%
Clock Output (internal clock)	4.5 Vp-p typical@ 800 KHz ±5%
Power Good Identification	High (Vo) = power good
Temperature Monitor Output	10 mV/°K (2.73 = 0°C)
Current Monitor Output	0 to 1 mA (1 mA = 100% Io rated)
Over Voltage Protection Adjust	110 to 150% Vo linear programming by voltage or resistor, or digital mode control

Notes: Nominal values apply with sense pins connected and other control pin unconnected.
ALP: Astec Linear Programming

AIF Series Data Sheet

Environmental Specifications

Operating temperature	-20 °C to +100 °C (case temperature)
Start up temperature	-40 °C to +100 °C (case temperature)
Storage temperature	-40 °C to +125 °C
Overtemperature protection	110 °C max

Ordering Information

Input Voltage	Output Voltage	Efficiency	Model Number
300 V	1.8 V @ 120 A	80% (Typ)	AIF120Y300
300 V	3.3 V @ 120 A	87% (Typ)	AIF120F300
300 V	5.0 V @ 80 A	90% (Typ)	AIF80A300
300 V	12 V @ 50 A	90% (Typ)	AIF50B300
300 V	15 V @ 40 A	90% (Typ)	AIF40C300
300 V	24 V @ 25 A	90% (Typ)	AIF25H300


1. For Negative enable, add suffix "-N".
2. For Non-thread hole, add suffix "-NT".
3. For RoHS 6, add suffix "-L". Default is RoHS 5.

Pin Assignments

Input (AC)	Output (DC)	Control Pins
31. Positive	21. Positive	1. +Sense
32. Negative	22. Positive	2. Temp Mon
	23. Positive	3. C Mon
	24. Positive	4. C Share
	25. Negative	5. Clk Out
	26. Negative	6. Clk In
	27. Negative	7. PG/ID
	28. Negative	8. C Lim Adj
		9. OVP Adj
		10. V Adj
		11. Enable
		12. -Sense

AIF Series Data Sheet

Mechanical Drawings

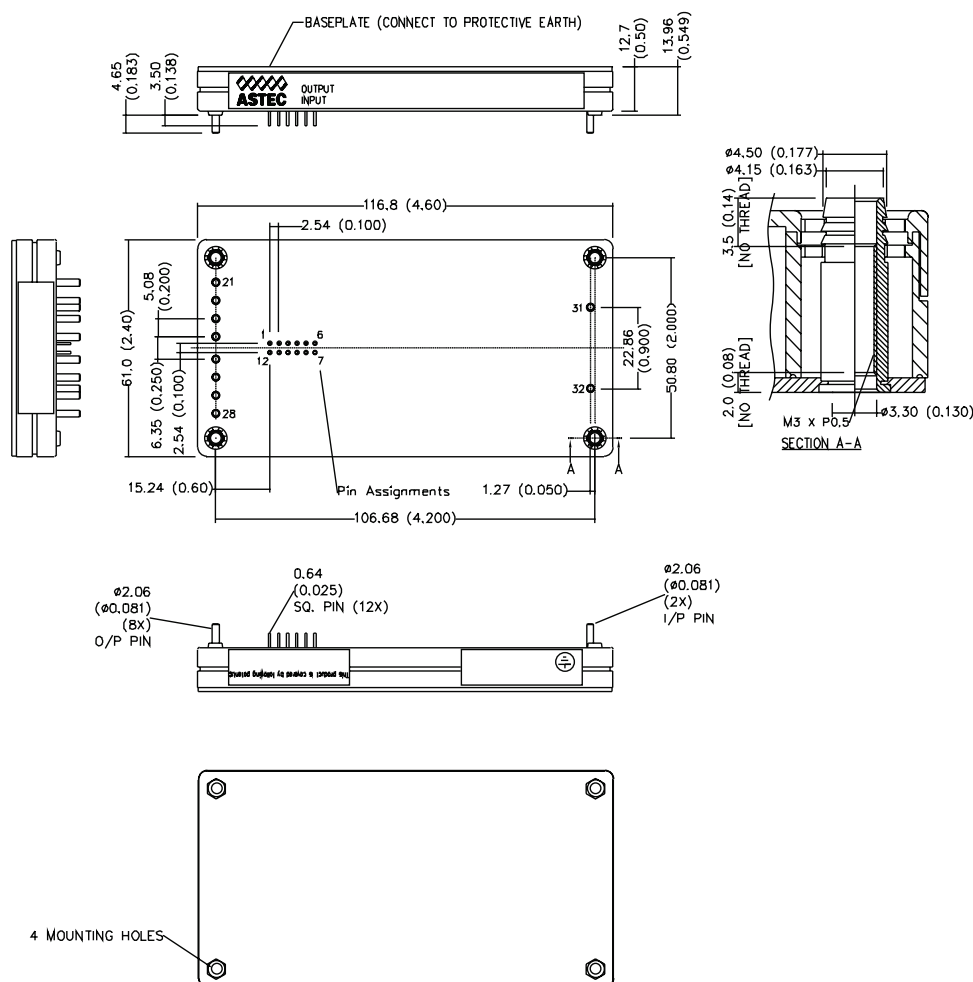

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN
EMBEDDED TECHNOLOGIES

www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners.
© 2015 Artesyn Embedded Technologies, Inc.

For more information: www.artesyn.com/power
For support: productsupport.ep@artesyn.com

AIF Series-DS 24Mar2015