
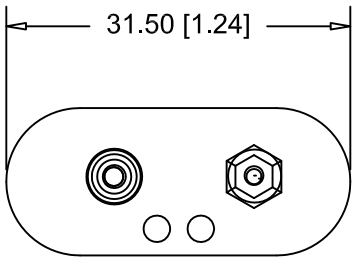
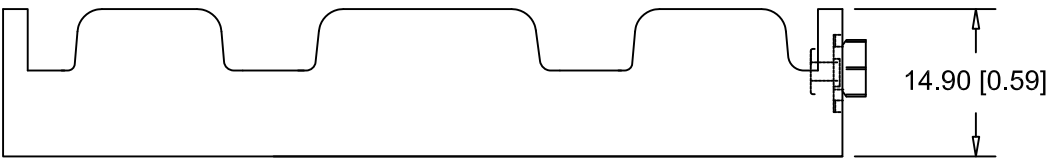



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|-----------------------------|------|------|-----|
| 07/12/13 | B | UPDATED TO ROHS 2 COMPLIANT | T.B. | B.S. | |
| | | | | | |
| | | | | | |
| | | | | | |

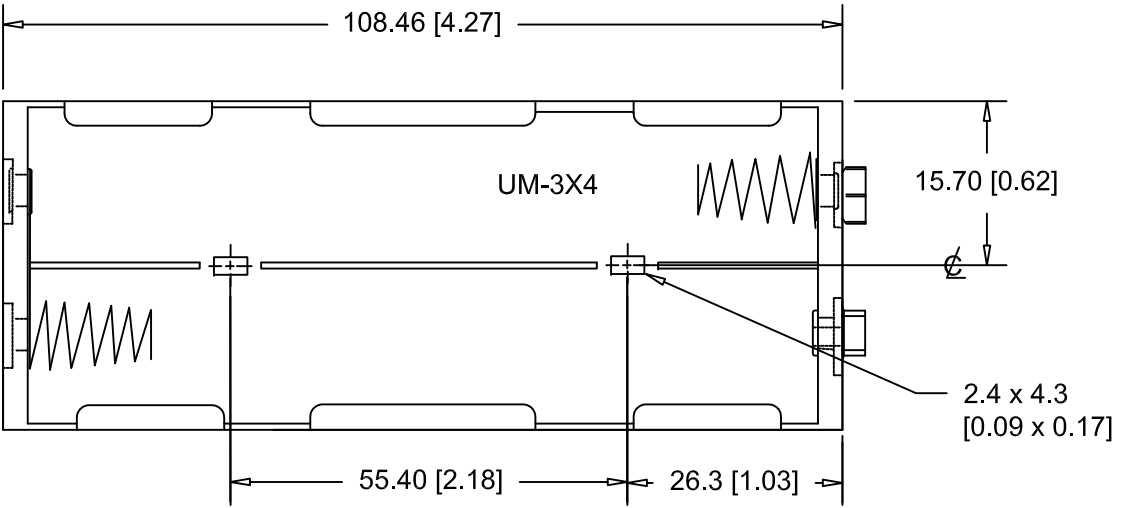

SPECIFICATIONS :

Plastic material - polypropylene
 Flammability Rating-UL94 HB, UL File No. E216959
 Temperature RangeE: -10°C to +100°C
 Springs - nickel plated spring steel
 Rivets - Brass, nickel plated
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000
 ROHS 2 COMPLIANT

| | | | |
|--------------------------------|---|------------------|----------------------------|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | Scale | Drawn By B.S. |
| | | | Approved By T.B. |
| decimal ±.5 (.020) | Title FOUR "AA" CELL HOLDER WITH SNAP FASTENERS | | |
| Fractional ± .8 (.030) | | Date 07/12/13 | Drawing Number BH34AASF |
| Angular ± 3° | | | |