

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)

[DCH-09S](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Series: DCH

Crimp and Poke D-Sub




❖ Wire range 20 to 30 AWG

Series options:

C = Clinch nuts (bottom side)

T = Threaded inserts (top side)

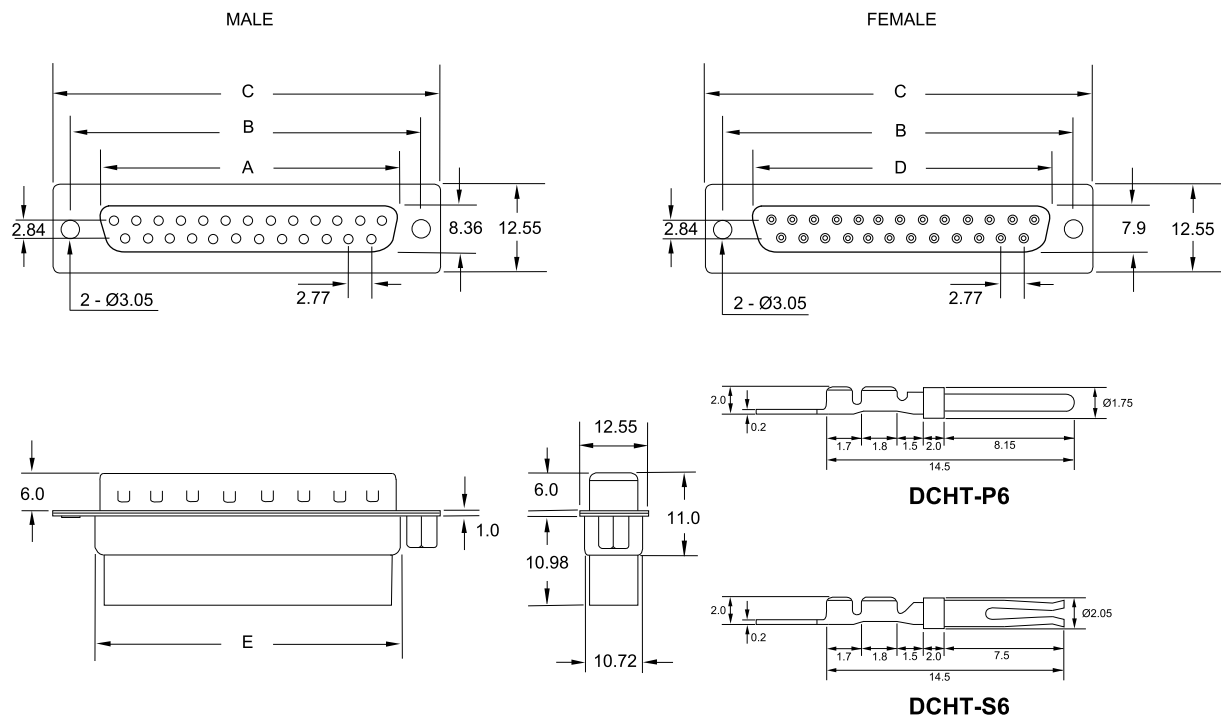

Ordering example: **DCH - 25 P - T**

Positions	A	B	C	D	E
09	16.92	24.99	30.81	16.33	19.28
15	25.25	33.32	39.10	24.66	27.51
25	38.96	47.04	53.10	38.38	41.30
37	55.42	63.50	69.32	54.84	57.71
50	52.86	61.11	66.90	52.34	55.30

Specifications

D-Sub Connector Series:

D

Ratings:

Current	5A
Dielectric strength	AC 1000V for 1 minute
Contact resistance	30mΩ max. at DC 100mA
Insulator resistance	1000MΩ min. at DC 500V

Material:

Plastic	PBT Glass-filled, UL94V-0
Color	Black
Contact male	Brass
Contact female	Phosphor Bronze
Shell	Tin
Temperature	-55°C / +105°C, 260°C for 5 sec. (solder bath resistant)

ORDERING PROCEDURE

1 - 2 3 4 - 5

- 1) Series
- 2) Number of Positions (see chart for available positions)
- 3) Gender:
 - P = Male
 - S = Female
- 4) Plating:
 - 1 = Full Flash Gold
 - 6 = Selective Flash Gold
 - 7 = Selective 10μ Gold*
 - 8 = Selective 30μ Gold*
 - * May Require Minimums
- 5) Series options:
 - A = 4-40 Jack screws assembled on connector
 - B = Board locks
 - C = Clinch nuts
 - F = Ferrite
 - G = Grounding straps
 - J = 4-40 Jack screws (bulk packed)
 - M = Machined pins
 - P = All plastic
 - T = Threaded inserts

Please refer to following pages for ordering examples.