

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Z-Hook](#)
[9120-8-S](#)


For any questions, you can email us directly:

sales@integrated-circuit.com



NOTES: UNLESS OTHERWISE SPECIFIED		REVISIONS	
LTR	DESCRIPTION	DATE	APPROVED

1. P/N: 0148/0 & P/N: 0201
INSULATOR: HEAT SHRINK TUBING 221. BLACK.
BODY: BRASS. 40μ [1.02μm] MIN GOLD OVER NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE. 40μ [1.02μm] MIN GOLD OVER NICKEL PLATED.
2. P/N: W-701/COLOR
28AWG 19X40 TINNED COPPER
0.047 [1.19] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
3. PERFORMANCE
MAXIMUM CURRENT: 1.0 AMPS
MAXIMUM VOLTAGE: 600 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

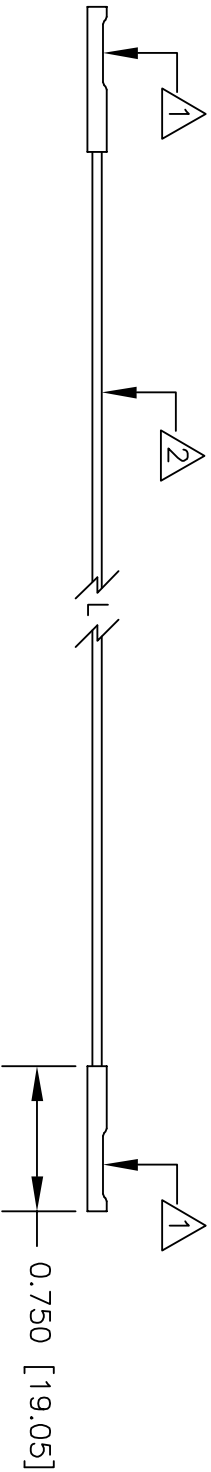

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± .XXX ± ±	CONTRACT NO.		E-Z-HOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	DESCRIPTION 0.025 [0.64] SQ. SOCKET JUMPER	SIZE A	CODE IDENT NO. 08505	DRAWING NO. 9120	REV.
			APPROVALS	DATE						
			DRAWN	R.L.	10/10					
		MATERIAL SEE NOTE.	APPROVED BY							
		FINISH SEE NOTE.								
NEXT ASSY	USED ON	SEE NOTE.								
APPLICATION		DO NOT SCALE DRAWING					SCALE 1:1			SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT.