

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[TXC CORPORATION](#)

[7L-16.3676MCG-T](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SMD TCXO

2.5 x 2.0 x 0.8 mm

7L Series




Features

- Temperature Stability: ± 0.5 ppm ~ ± 2.0 ppm
- Operating Temperature Range: -30°C ~ 85°C
- Supply Voltage: 1.8 V ~ 3.3 V
- Voltage Control Function Available
- Frequencies: 16.367667 MHz, 16.368 MHz, 16.369 MHz, 19.2 MHz, 26 MHz, 33.6 MHz, 38.4 MHz, 40 MHz
- Applications: GPS, WiMAX, Cellular and Wireless Communications
- RoHS Compliant / Pb Free

Electrical Specifications


Item / Type		7L
Output Type		Clipped Sinewave
Output Load		10K Ω // 10 pF
Oscillation Mode		Fundamental
Supply Voltage		1.8 ~ 3.3 V
Frequency Range		13 ~ 52 MHz
Clipped Sinewave Output Voltage		0.8 Vp-p typical
Frequency Stability	Vs. Temperature ($-30 \sim +85^{\circ}\text{C}$)	$\pm 0.5 / \pm 2.0$ ppm
	Vs. Load (Load varies $\pm 10\%$)	± 0.2 ppm Max.
	Vs. Supply Voltage (V_{CC} = Typical ± 0.1 V)	± 0.2 ppm Max.
Frequency Tolerance	at 25°C after 2 Reflows with Typical Applied to Auto Frequency Control Pin	± 2.5 ppm Max.
Slope of Frequency Drift		± 0.1 ppm / $^{\circ}\text{C}$ Typical ; ± 0.5 ppm / $^{\circ}\text{C}$ Max.
Storage Temperature Range		$-40 \sim +85^{\circ}\text{C}$
Auto Frequency Control (AFC) Range (Center @ 1.4 V)		$\pm 7 \sim \pm 16$ ppm / V
Supply Current		2.0 mA Max.
Start-up Time		5 ms Max.
Harmonics		- 5 dBc Max.
Phase Noise at 1 KHz offset		- 130 dBc / Hz
Aging (at 25°C)		± 1 ppm / year Max.

Dimensions

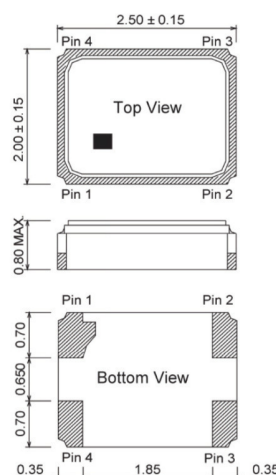

Pin Connection

Name	Function
Pin 1	AFC
Pin 2	GND
Pin 3	OUTPUT
Pin 4	VCC



Units: mm