

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Hammond Manufacturing](#)
[1750K](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

1750K

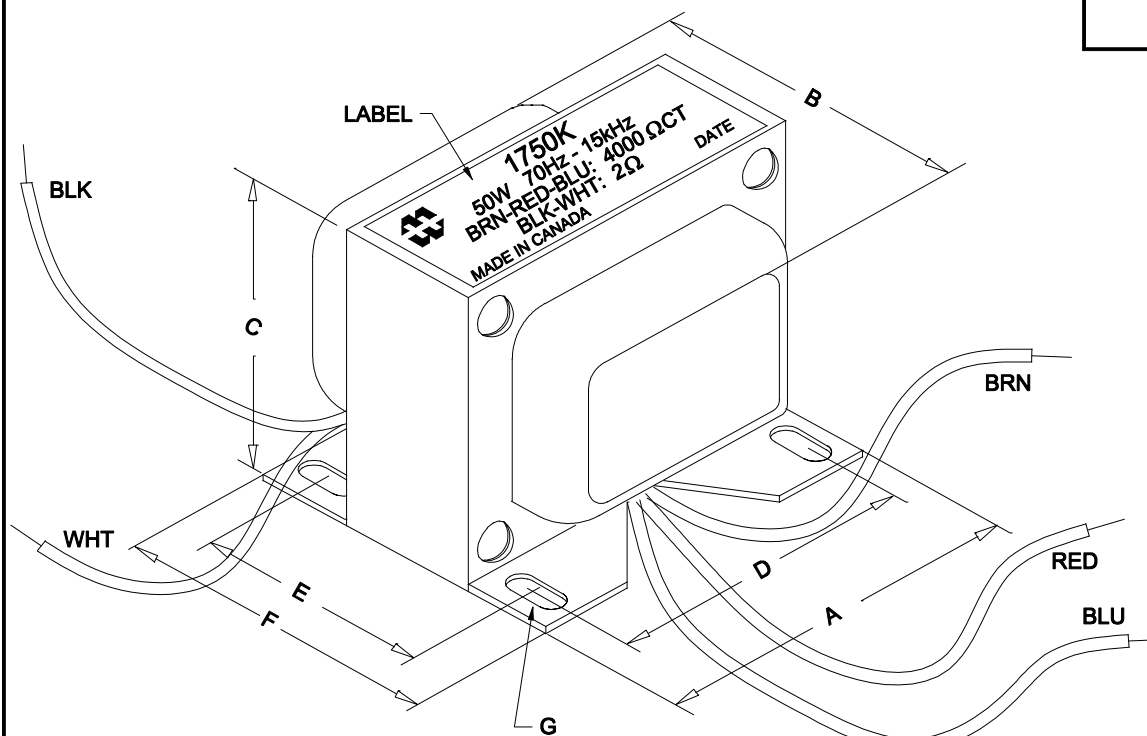

NOTE: ALL LEADS 9.0" OUT MIN.

DIMENSIONS:

A	4.063" ±0.063
B	3.125" ±0.125
C	3.453" ±0.063
D	3.500" ±0.063
E	2.000" ±0.063
F	2.560" ±0.063
G	0.177"X 0.300" ±0.015

PRIMARY

BLU

RED

4000 Ω CT

BRN

SECONDARY

2 Ω WHT

COM BLK

ELECTRICAL DATA:

Turns ratio:	44.67 : 1
Inductance	@ 240V, 50Hz =>42.44H (Open circuit)
DCR	@ 20°C, BRN - RED =43.15 Ω ±20%
	@ 20°C, RED - BLU =46.28 Ω ±20%
	@ 20°C, BLK - WHT =0.180 Ω ±20%
FREQ. RESP	@ 50W (447V), 70Hz - 15kHz ±1db (1kHz ref)
Pri. Impedance	4000 Ω CT (447V)
Sec. Impedance	2 Ω (10V @ 5A)
Power	50 WATTS



**HAMMOND
ELECTRONICS**

52 RANKIN PLACE,
WATERLOO, ONTARIO, N2L 3Z5.
PHONE (519) 886-6181
FAX # (519) 886-9540

TITLE

OUTPUT TRANSFORMER

1750K

			DR BY IOAN POP
0	05/11/09	PRELIMINARY.	I.P. DATE 05/11/09
NO	DATE	REVISION	DIM IN(X)MM()