

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Molex Connector Corporation](#)
[0901980001](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

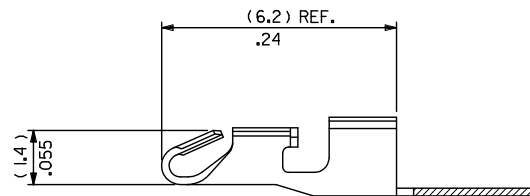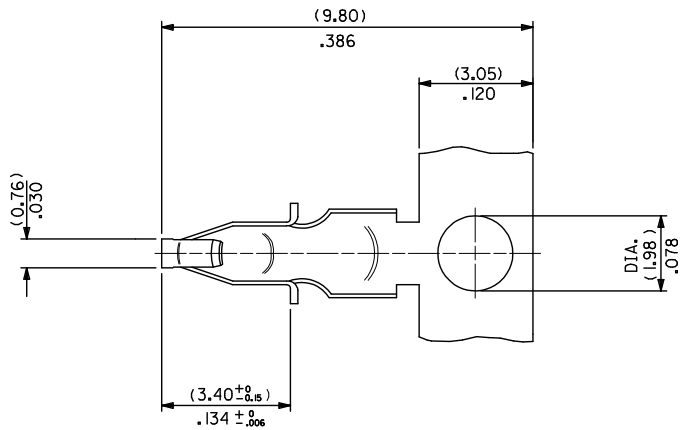

NOTE: INTER LEAF PAPER
BETWEEN LAYERS



UNREELING DIRECTION
TO CUSTOMER

NOTES.

1. MATERIAL: (0.20)/.008 PHOS.BR, PER E.S. 99001-0454.
2. PLATING: HOT TIN DIP 1.0μm - 2.5 μm
3. TERMINAL WILL ACCOMODATE
22 AWG SOLID OR FUSED WIRE
24 AND 26 AWG SOLID, STRANDED OR FUSED WIRE
WITH (1.52)/.060 MAX. INSULATION DIA.
4. P.C.B. MOUNTING HOLE:
22 AWG DIA (1.23/1.30)-.048/.051
24 AND 26 AWG DIA (1.17/1.25)-.046/.049
5. MAX. PCB THICKNESS (1.57±0.20)/.062±.008

2	M
1	M

UPDATED NOTE 2 EC NO: E2007-0844 DRAWN BY: MCDONNELL CHKD: APPROPOLAN REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION	TITLE	SHEET NO.		
					MM/IN		10:1	METRIC					
				mm	INCH	DRAWN BY	DATE						
						CHECKED BY	DATE						
						APPROVED BY	DATE						
			4 PLACES ± --- ± ---		MC		88/10/30	PCM CRIM TERM BRD-IN					
			3 PLACES ± --- ± .008		CHECKED BY		DATE	STAND ALONE 1TNL					
			2 PLACES ± 0.20 ± .015		88/05/03								
			1 PLACE ± 0.38 ± ---		APPROVED BY		DATE	MOLEX MOLEX INCORPORATED					
			ANGULAR ± .5 °		MWH/WHITE		96/07/22						
			DRAFT WHERE APPLICABLE		MATERIAL NO.		DOCUMENT NO.						
			MUST REMAIN		901980001		SD-90198		1 OF 2				
			WITHIN DIMENSIONS		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						