

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[Molex Connector Corporation](#)
[0522071585](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

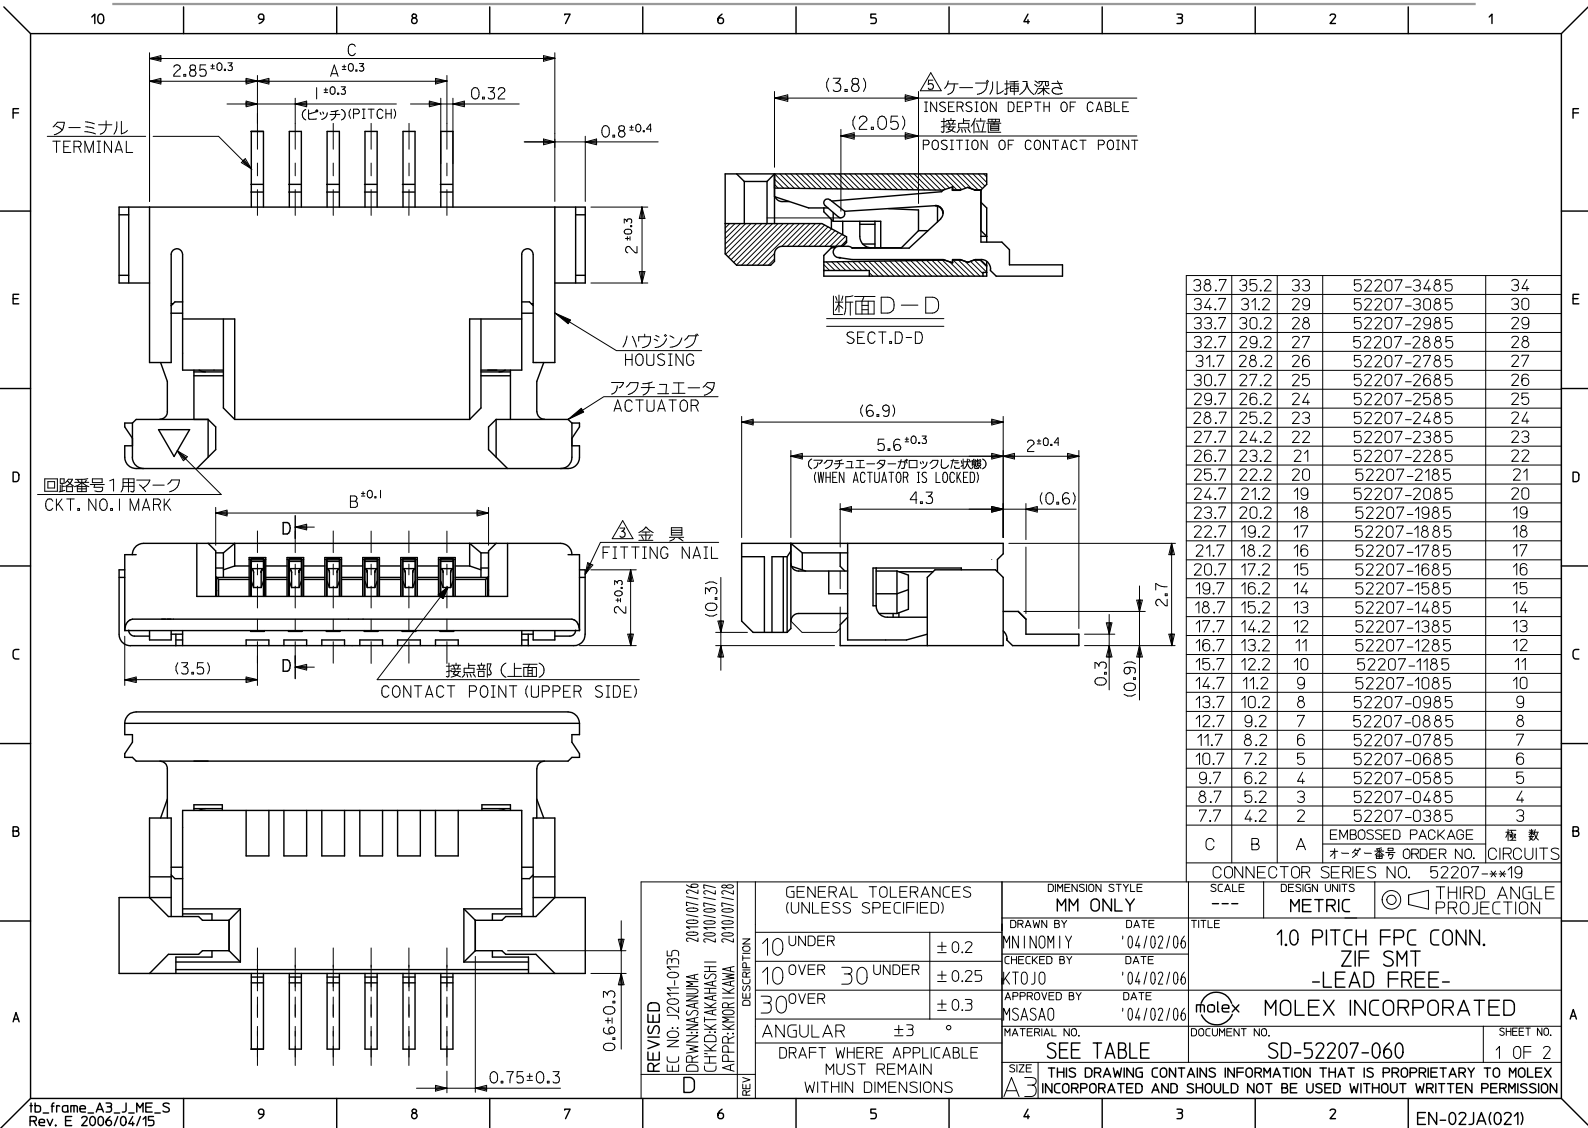

10 9 8 7 6 5 4 3 2 1

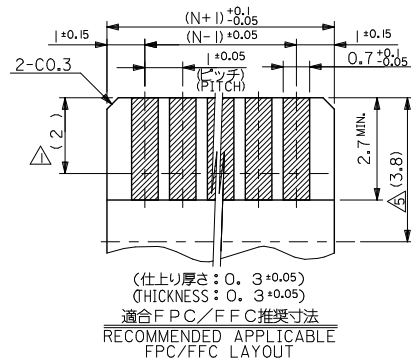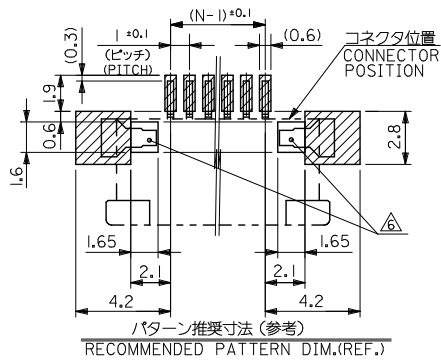

注記 NOTES

- △ 接点部までの嵌合長さ。
LENGTH TO CONTACT POINT.
2. 使用材料 MATERIAL
ハウジング : 46ナイロン (耐熱性)・UL94V-0
アクチュエータ : PPS・UL94V-0
ターミナル : リン青銅
TERMINAL : PHOSPHOR BRONZE
銅・ビスマスメッキ 1.0 マイクロメートル以上
TIN BISMUTH 1.0 MICROMETER MINIMUM
ニッケル下地 1.0 マイクロメートル以上
NICKEL UNDER PLATING 1.0 MICROMETER MINIMUM
銅合金
FITTING NAIL : COPPER ALLOY
銅メッキ 1.0 マイクロメートル以上
TIN 1.0 MICROMETER MINIMUM
ニッケル下地 1.0 マイクロメートル以上
NICKEL UNDER PLATING 1.0 MICROMETER MINIMUM

- △ パターンはくり止め用金具
FITTING NAIL FOR PREVENTION OF PEELING OF P.C.B. PATTERN.
4. エンボステープ梱包時は、アクチュエータがロックした状態とする。
IN THE PACKAGE, ACTUATOR OF PART NO.52207-119 SHOULD BE LOCKED.

- △ ケーブル挿入深さ
INSERTION DEPTH OF CABLE.
△ パターン書き込み禁止エリア
NO FOOT PRINT AREA.
7. 本製品は 52207-117 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52207-117.




8. ELV 及び RoHS 適合品
ELV AND RoHS COMPLIANT

FPC について :

打抜き方向は導体側から補強板を推奨致します。
補強フィルム材質はポリイミドを推奨致します。
接着剤は熱硬化接着剤を推奨致します。
ABOUT FPC:
RECOMMENDED PUNCHER DIRECTION : FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.
RECOMMENDED MATERIAL
STIFFENER FILM : POLYIMIDE
BONDING AGENT : THERMOSETTING BONDING AGENT

SEE SHEET 1 DRAWN: SANJANA 2010/07/26 CHECKED: KASHI 2010/07/27 APPROVED: KAWA 2010/07/28	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		10 UNDER	± 0.2	DRAWN BY MNINOMIY	DATE '04/02/06	TITLE 1.0 PITCH FPC CONN ZIF SMT -LEAD FREE-			
		10 OVER 30 UNDER	± 0.25	CHECKED BY KTOJO	DATE '04/02/06				
		30 OVER	± 0.3	APPROVED BY MSASAO	DATE '04/02/06				
		ANGULAR ±3 °		MATERIAL NO.		MOLEX MOLEX INCORPORATED			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 1 OF 2		DOCUMENT NO. SD-52207-060			
				SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
REV						SHEET NO. 2 OF 2			

10 9 8 7 6 5 4 3 2 1

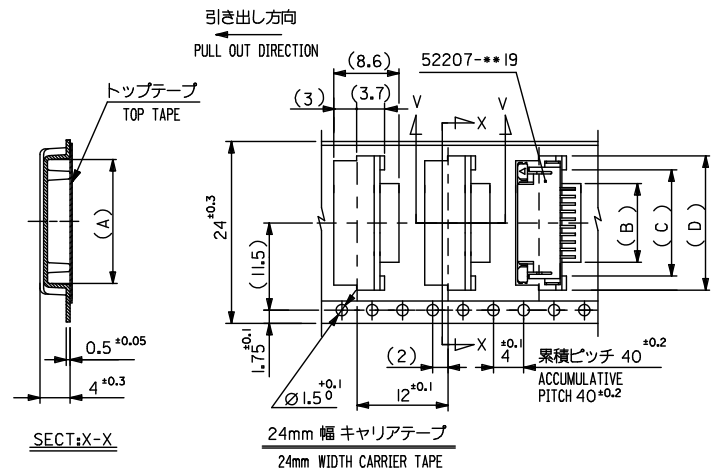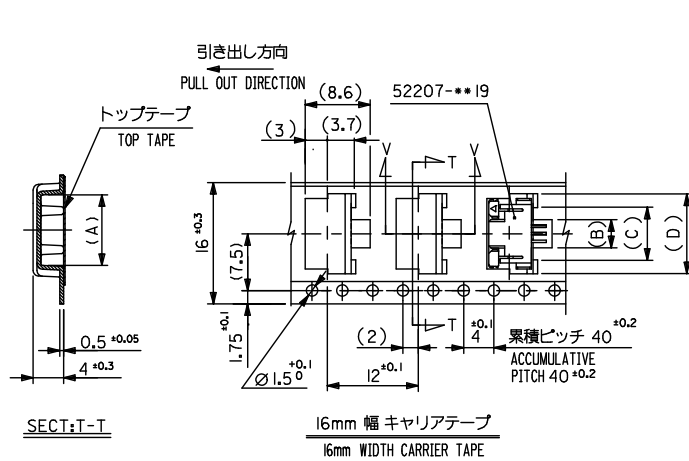

24	29.4	25.4	18.5	15	11.7	17.3	52207-1185	11	
			17.5	14	10.7	16.3	4 -1085	10	
			16.5	13	9.7	15.3	-0985	9	
			15.5	12	8.7	14.3	-0885	8	
			14.5	11	7.7	13.3	-0785	7	
			13.5	10	6.7	12.3	-0685	6	
			12.5	9	5.7	11.3	-0585	5	
			11.5	8	4.7	10.3	7 -0485	4	
52207-***85	16	21.4	17.4	10.5	7	3.7	9.3	52207-0385	3
MODEL NO.	キャリアテープ幅 CARRIER TAPE WIDTH	H	E	(D)	(C)	(B)	(A)	MATERIAL NO.	極致 CKT.

REVISED EC NO. J2009-2061 DRAWN: KON CHKD: MATSUMOTO APPR: NUKITA 2009/05/20 2009/05/21 2009/05/21	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
	10 UNDER	±0.2	DRAWN BY	DATE	TITLE EMBOSSED TAPE PACKAGE FOR 52207-***19 -LEAD FREE-		MOLEX INCORPORATED		SHEET NO. 1 OF 3	
	10 OVER 30 UNDER	±0.25	CHECKED BY	DATE						
	30 OVER	±0.3	APPROVED BY	DATE	DOCUMENT NO. SD-52207-061		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		EN-02JA(021)	
	ANGULAR	±3	MATERIAL NO.	DATE						

